


Calma

nurus

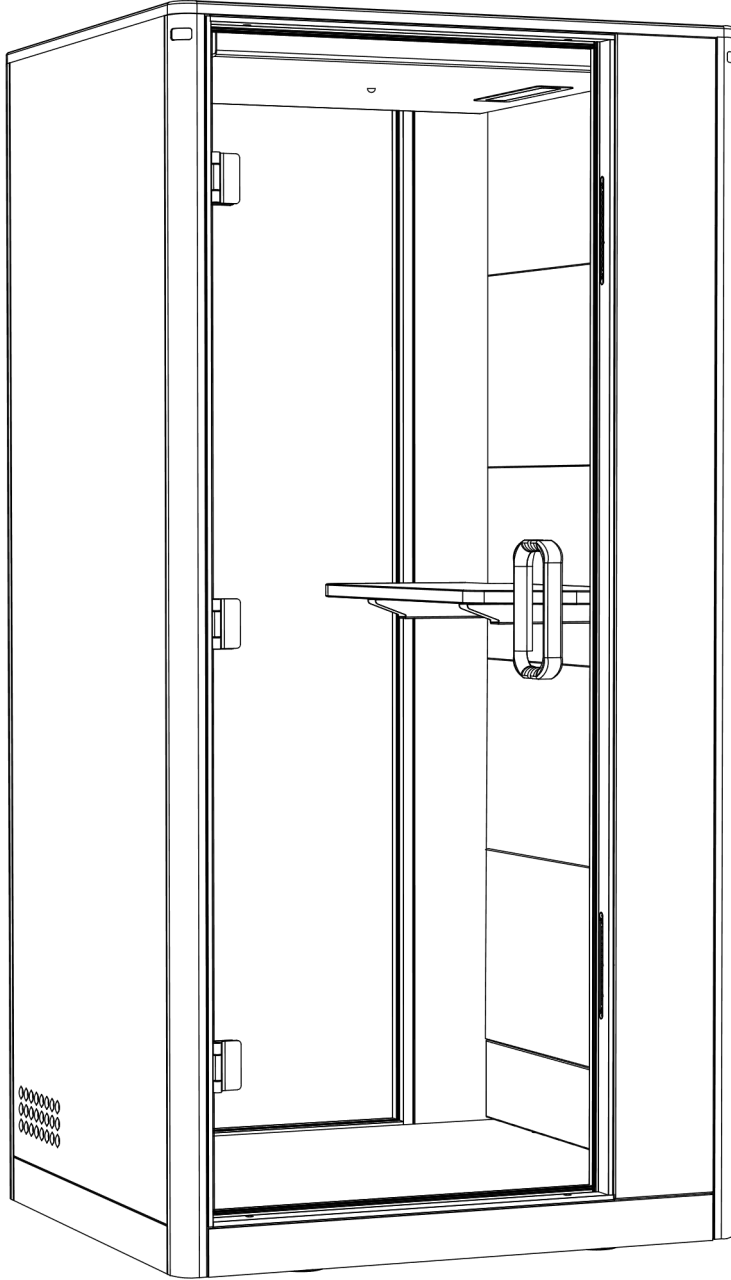

SMALL

Installation Manual
Made in Türkiye

Contents

1.0 – Preface	.4
• 1.1 – Manual Contents	.4
• 1.2 – Product Information	.4
• 1.3 – Intended Use	.4
• 1.4 – Non-conventional Use	.5
• 1.5 – Warning, safety, and information symbols in this manual	.5
• 1.6 – Main safety risks to the installation, maintenance, disassembly, and use of the product	.6
2.0 – Placement of Markings	.9
3.0 – Packaging Information and Sub-Layers	.11
4.0 – Required Tools for Installation	.12
5.0 – Main Dimensions	.13
• 5.1 – Required Working Space	.14
6.0 – Components	.15
7.0 – Seismic Anchoring (optional)	.18
8.0 – Power Inlet Direction	.21
9.0 – Begin Installation	.24
10.0 – In Case you Need to Change Calma’s Location	.57
11.0 – In Case you Need to Adjust the Hinges	.59
12.0 – Installing the Fixed Table	.65



DO NOT THROW AWAY THIS MANUAL.

Important Safety and Product Information

1.0 - Preface

This installation manual provides a detailed description on how to install the Calma Small. Each person that will use the Calma Small should read and be aware of the dangers and warnings highlighted in the installation manual to achieve maximum safety during the usage of the pod.

This manual contains all the necessary information to correctly use the Calma pod.

All product information, user and installation manuals can be found on our website: www.calma.nurus.com

1.1 - Manual Contents

This installation manual contains general information about :

- Instructions on how to install the Calma pod.
- Safety information
- Guidelines on the purpose and content of the instructions.

1.2 - Product Information

The information in this manual reflects the product at the time of delivery. All details provided are accurate as of the publication date.

1.3 - Intended Use

The Calma Small is intended for interior use in commercial spaces to be used by one person at a time only.

Warning:

WARNING - To prevent burns, fire, electric shock, or injury, only use the product as intended and avoid using accessories not approved by the manufacturer

1.4 - Non-conventional Use

Any product use or maintenance not specifically authorized in the installation, maintenance or maintenance; forbidden. This includes:

- Installing, maintaining, or disassembling the pod without fully understanding the provided instructions.
- Using the pod beyond its specified limits
- Modifying or changing the structure of the pod
- Using the pod despite visible defects or damage
- Using the pod outdoors or in unsafe temperature or air quality conditions
- Climbing on or placing heavy objects on the roof of the product
- Smoking inside the pod

1.4.1 - Operating Conditions

The pod is designed to function under the following conditions:

- Temperature range: +15°C to +30°C (59°F to 86°F)
- Maximum humidity: 50%
- Adequate air quality around the product

1.5 - Warning, safety and information symbols in this manual

The warnings in this manual are categorized as follows:

- The term "**DANGER**" signifies a hazardous situation that, if not avoided, will lead to death or serious injury.
- The term "**WARNING**" refers to a hazardous situation that, if not avoided, could lead to death or injury.

The safety symbols in this manual may also appear on the product. Anyone involved in installation, disassembly, maintenance, or use of the product must be familiar with and follow all safety symbols, labels, and instructions for the tasks they are performing.

Table 1: Hazard



	The symbol of an exclamation mark within a colored triangle signifies a dangerous situation.
	

Table 2: Mandatory











	A white symbol within a colored circle signifies an action that needs to be taken to prevent a hazardous situation.
---	---














Table 3: Prohibited Action

	A circle with a diagonal line shows an action that is prohibited.
---	---





1.6 - Main safety risks to the installation, maintenance, disassembly and use of the product

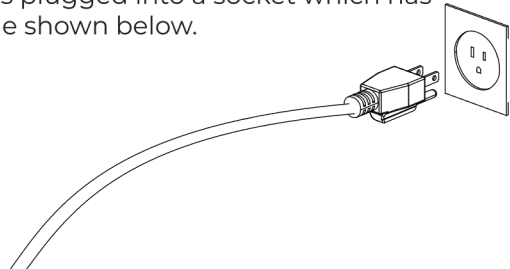1.6.1: Installation, maintenance, and disassembly

	WARNING! To prevent burns, fire, electric shocks, or injuries, follow these safety instructions:
	Wear cut-resistant gloves when installing, maintaining, or taking apart the product.
	Wear steel-toed boots while performing installation, maintenance, or disassembly of the product.
	Be sure to read and fully understand the instructions and plan your task ahead of time.
	Follow all local workplace safety rules and regulations
	Keep the work area clean and free from clutter during installation, maintenance, or disassembly.
	Do not climb on top of the product or place any load on the roof of the product.
	When moving the pod, ensure that the Calma Small is on its casters to move around easily. Do not move the Calma Small without ensuring the casters are on the ground.

	Do not use the product if the ventilation is not working.
	Do not use the product if the ventilation channels are blocked. Ensure the channels are clear of lint, hair, and similar obstructions.
	If you observe any electrical defects or the product isn't functioning correctly, unplug it and contact the dealer or manufacturer immediately.
	Do not insert or drop anything into any opening unless you are specifically instructed to do so.
	The product is not intended for outdoor use.
	Do not use aerosol (spray) products where there is no oxygen supply
	Do not climb on top of the product or place any load on the roof of the product.
	Do not lean on the pod.
	Do not smoke inside the pod.
	Do not block the view through the front and back glass panels by adding signs, decorations, or installing blinds that prevent people from seeing inside in case of emergencies.
	DANGER! When cleaning and doing maintenance on the Calma, ensure that the power cord is disconnected from the power outlet to avoid electric shock.
	ATTENTION! The Calma will only work with a 100-120 V AC circuit which has a grounding prong. Do not use an adapter with this product otherwise it could affect the function of the pod. Pay attention that the power cord is plugged into a socket which has a grounding prong inlet like the one shown below. 

1.6.2: Moving the product on casters

	<p>WARNING!</p> <p>The product is very heavy. Moving the product on the casters requires planning and care. Make sure the product cannot tip over while moving.</p>
	<p>Only move the product on even surfaces: no crack or thresholds over 3mm (1/8in) on the intended route.</p>
	<p>When moving the product, only push below the vertical middle. Do not tow the product.</p>
	<p>Do not enter the product if it is standing on the casters. It is only allowed to use the casters for moving the product. Return the full weight of the product onto the leveling feet immediately after relocation and level the floor.</p>

2.0 – Marking Placements and Labels

Ceiling unit

Input: Input:12 -24V DC (2A MAX)

Model: Small

Rev. 3.1

S/N

Calma
nurus

WARNING!

Risk of injury

Maximum table load 110 lbs /50 kg

L'AVERTISSEMENT

Risque de blessure


Poids maximal autorisé 110lbs /50 kg

FOR U.S. AND CANADA ONLY

WARNING! - Fire and electric shock risk!

Use only SJT type 14 AWG power cord.

L'AVERTISSEMENT - Risque d'incendie et de choc électrique. Utiliser uniquement un cordon d'alimentation 14 AWG.

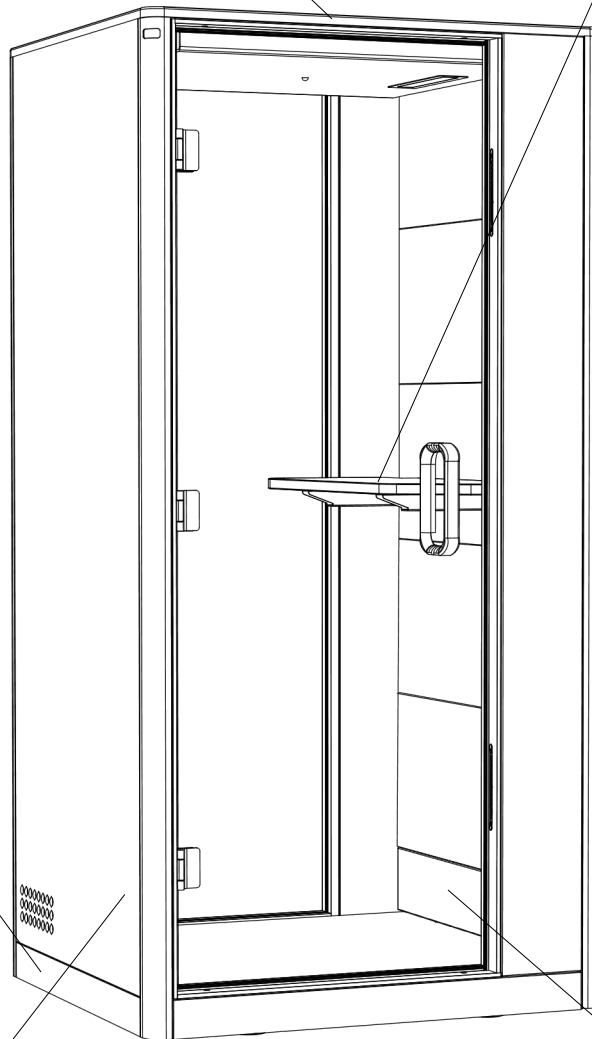

WARNING!

RISK OF INJURY

Do not use in areas where children or individuals with cognitive disabilities are expected to be present without supervision

L'AVERTISSEMENT,

RISQUE DE BLESSEUR,

Ne pas utiliser ces cabines dans des lieux susceptibles d'accueillir des enfants ou des adultes souffrant de troubles cognitifs sans surveillance.

Calma
nurus

Product / Produit
Input / Entrée

CALMA SMALL
Input: 100-240V AC (8A) 50/60 Hz








Manufacturer/Fabricant: NURUS
Web: calma.nurus.com
Email: info@nurus.com.tr
Oguz Caddesi no. 25 Sincan/ANKARA

Manufacture date /
Date de Fabrication

Attention!
Ensure the product is properly connected to a grounded outlet to prevent the hazard of fire or electric shock.

Attention!
Branchez toujours le produit dans une prise reliée à la terre pour éviter tout risque d'incendie ou choc électrique.




Position	Label	Label Text
1.	<div> Ceiling unit Input: Input:12 -24V DC (2A MAX) Model: Small Rev. 3.1 S/N  </div>	Ceiling unit Input: 12 - 24V DC (2A MAX) Model: Small Rev. 3.1 S/N
2.	<div> WARNING! Risk of injury Maximum table load 110 lbs /50 kg L'AVERTISSEMENT Risque de blessure Poids maximal autorisé 110lbs /50 kg </div>	WARNING! Risk of injury Maximum table load 110 lbs /50 kg L'AVERTISSEMENT Risque de blessure Poids maximal autorisé 110lbs /50 kg
3.	<div> WARNING! RISK OF INJURY Do not use in areas where children or individuals with cognitive disabilities are expected to be present without supervision. L'AVERTISSEMENT, RISQUE DE BLESSEURE, Ne pas utiliser ces cabines dans des lieux susceptibles d'accueillir des enfants ou des adultes souffrant de troubles cognitifs sans surveillance. </div>	WARNING! RISK OF INJURY Do not use in areas where children or individuals with cognitive disabilities are expected to be present without supervision. L'AVERTISSEMENT, RISQUE DE BLESSEURE, Ne pas utiliser ces cabines dans des lieux susceptibles d'accueillir des enfants ou des adultes souffrant de troubles cognitifs sans surveillance.
4.	<div> FOR U.S. AND CANADA ONLY WARNING! - Fire and electric shock risk! Use only SJT type 14 AWG power cord. L'AVERTISSEMENT - Risque d'incendie et de choc électrique. Utiliser uniquement un cordon d'alimentation 14 AWG. </div>	FOR U.S. AND CANADA ONLY WARNING! - Fire and electric shock risk! Use only SJT type 14 AWG power cord. L'AVERTISSEMENT - Risque d'incendie et de choc électrique. Utiliser uniquement un cordon d'alimentation 14 AWG.
5.	<div>      CALMA SMALL Input: 100-240V AC (8A) 50/60 Hz Product / Produit Input / Entrée Attention! Ensure the product is properly connected to a grounded outlet to prevent the hazard of fire or electric shock. Attention! Branchez toujours le produit dans une prise reliée à la terre pour éviter tout risque d'incendie ou choc électrique.  Manufacturer/Fabricant: NURUS Web: calma.nurus.com Email: info@nurus.com.tr Oğuz Caddesi no. 25 Sincan/ANKARA Manufacture date / Date de Fabrication </div>	Manufacturer/Fabricant: NURUS Web: calma.nurus.com Email: info@nurus.com.tr Oğuz Caddesi no. 25 Sincan/ANKARA Manufacture date / Date de Fabrication Product / Produit Input / Entrée Attention! Ensure the product is properly connected to a grounded outlet to prevent the hazard of fire or electric shock. Attention! Branchez toujours le produit dans une prise reliée à la terre pour éviter tout risque d'incendie ou choc électrique. CALMA SMALL Input 100-240V AC (8A) 50-60 Hz


3.0 – Packaging Information and Sub-Layers

PACKAGING ORDER FOR SMALL	SUB ASSEMBLY MARKINGS	EXPLANATION
1. FLOOR	SUB_1	Floor
2. FRONT/BACK BASE	SUB_2	Front and Back Plinth
3. RIGHT WALL	SUB_3	Right Wall
4. BACK WALL	SUB_4	Back Wall
5. FRONT WALL	SUB_5	Front Wall
6. BACK WINDOW	SUB_6	Back Window
7. LEFT WALL	SUB_7	Left Wall
8. DOOR	SUB_8	Glass Door
9. CEILING	SUB_9	Ceiling
10. RIGHT KICKPLATE	SUB_10	Right Kickplate
11. LEFT KICKPLATE	SUB_11	Left Kickplate
12. LEFT WALL CUSHIONS	SUB_12	Left Wall Cushions
13. RIGHT WALL CUSHIONS	SUB_13	Right Wall Cushions
14. TABLETOP	SUB_14	Tabletop
15. TABLE STRTUCTION	SUB_15	Table Structure
16. FASTENERS	SUB_16	Screws/Fasteners

4.0 – Required Tools for Installation

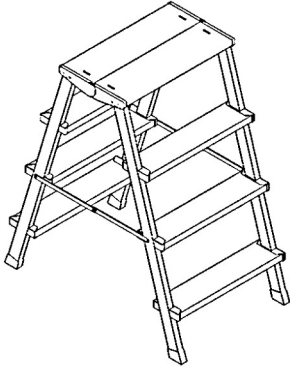


LADDER
(4 steps, h: 82,5)



POWER TOOL




ALLEN
(2,5 / 3 / 4 / 5 / 6 mm)



SUCTION
CUPS



HEX SOCKET
(13mm)



LEVEL


* (If you install the handle before inserting the magnets, the suction cups will not be necessary.)



PHILLIPS
DRILL BIT

* Power tool, allen keys, hex socket, level tool and ladder are not included.

5.0 – Main Dimensions

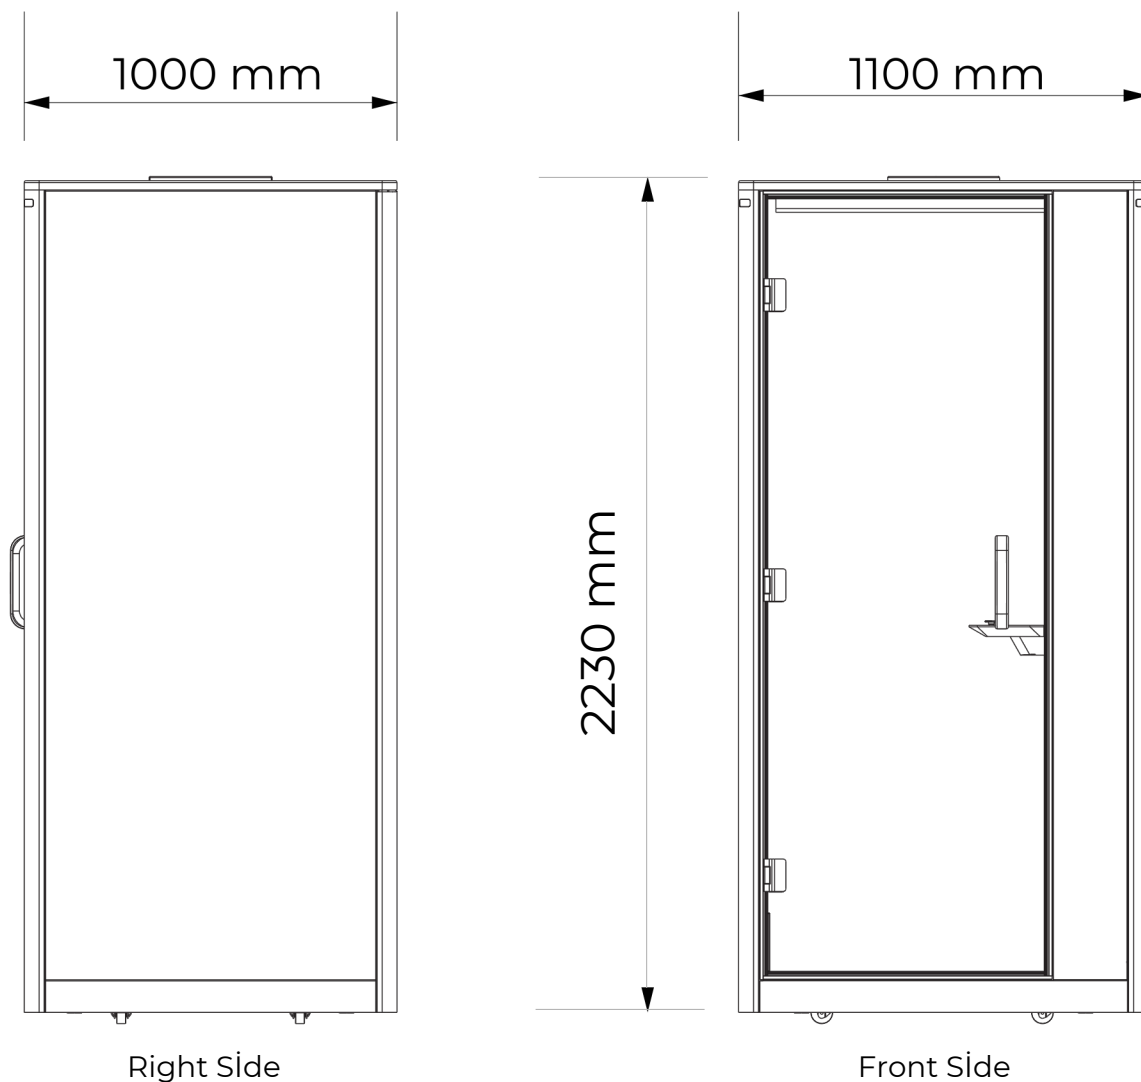

The Calma Small is intended for interior use in commercial spaces only. It is to be used by one person at a time.




WARNING – To reduce the risk of burns, fire, electric shock, or injury to persons; use this product **only** for its intended use. Do not use attachments not recommended by the manufacturer.

5.0 – Main Dimensions

ATTENTION!


- The roof of the Calma Small and the ceiling of the building should have a minimum distance of 200 mm / 8 inches between them.

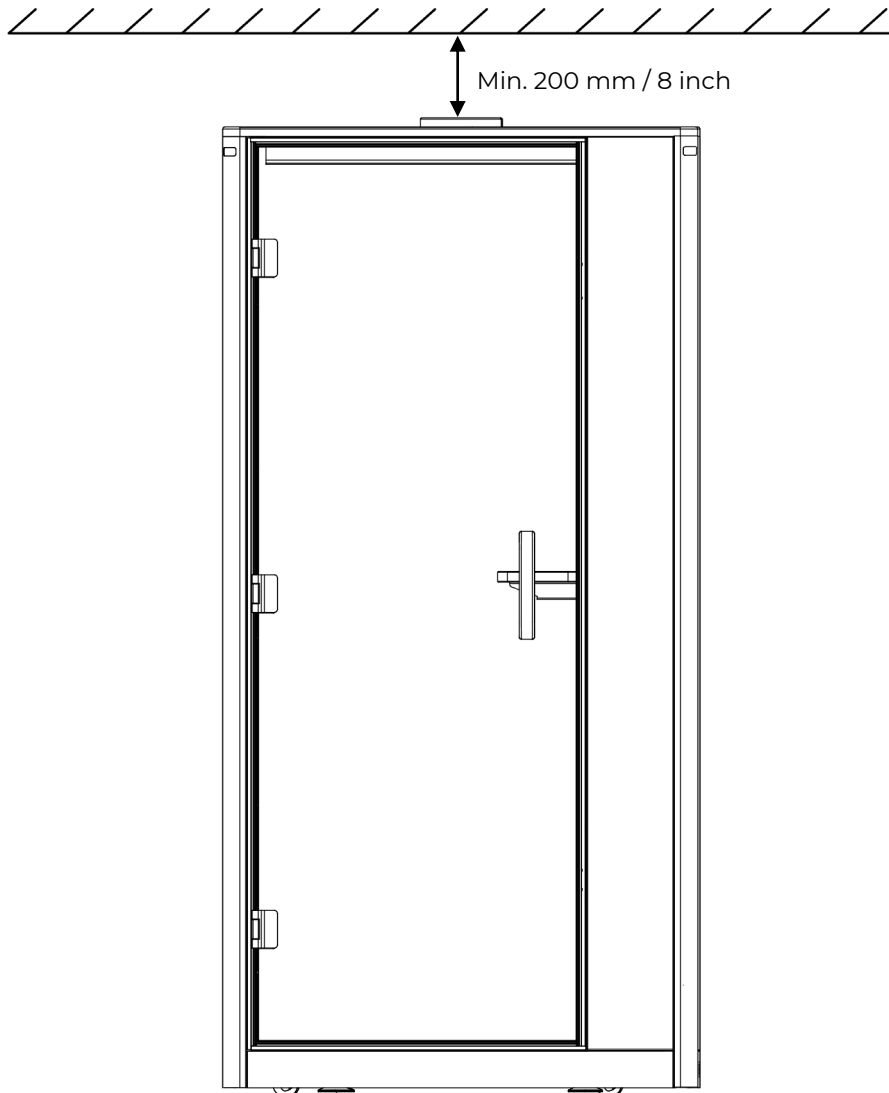

WARNING –

If the fan units are too close to the ceiling of the building, the airflow within the Calma Small will not function properly.

5.1 – Required Working Space


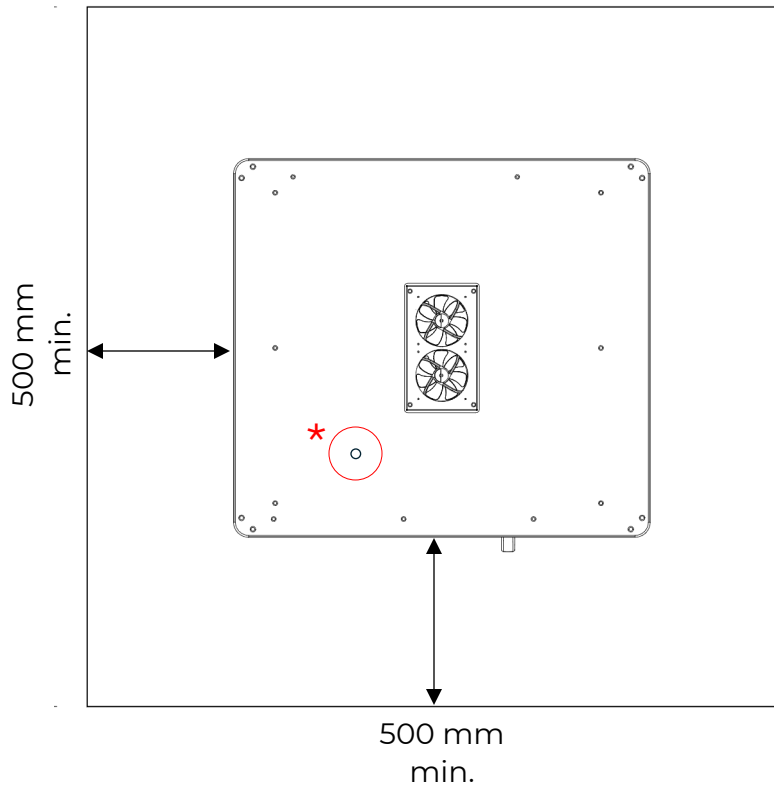










- When installing the Calma pod, ensure that the working space during the installation is no less than 25m². The casters should also only be engaged after the pod has been fully constructed in order to move it into place.
- It is also recommended to construct the Calma small as close to its final position as possible to avoid moving it after the installation.
- The Calma offers the option of installing a sprinkler system inside the pod through a designated space on the ceiling which can be opened.












6.0 - Components

FASTENERS

Letter	Image	Name	Number
A		8X16 HEX SOCKET BUTTON HEAD BOLT	6X
B		6X12 FLAT HEAD HEX SCREW	62X
C		8X50 COUNTERSUNK SCREW	8X
D		6X35 FLAT HEAD SCREW	5X
E		DOOR MAGNETS	2x
F		6X20 FLAT HEAD SCREW	4X
G		RAPID CLIP	8X
H		RAPID PIN	8X
I .1		DOOR HANDLE	1X
I .2		DOOR HANDLE WITH SETSCREW	1X


FASTENERS

Letter	Image	Name	Number
J		8X35 INBUS BOLD HEAD SCREW	2X
K		PULL PIN	2X
L		DOOR DELRIN	2X
M		SILICONE STOPPER	4X
N		5x5 SETSCREW	8X
O		PIECE OF FOAM	2X
P		6X12 HEX SOCKET BUTTON HEAD BOLT	6X
Q		6X20 HEX SOCKET BUTTON HEAD BOLT	4X
R		3.5 YHB SELF- TAPPING SCREW	8X

7.0 – Seismic Anchoring (optional)


1.


1. SUB_1

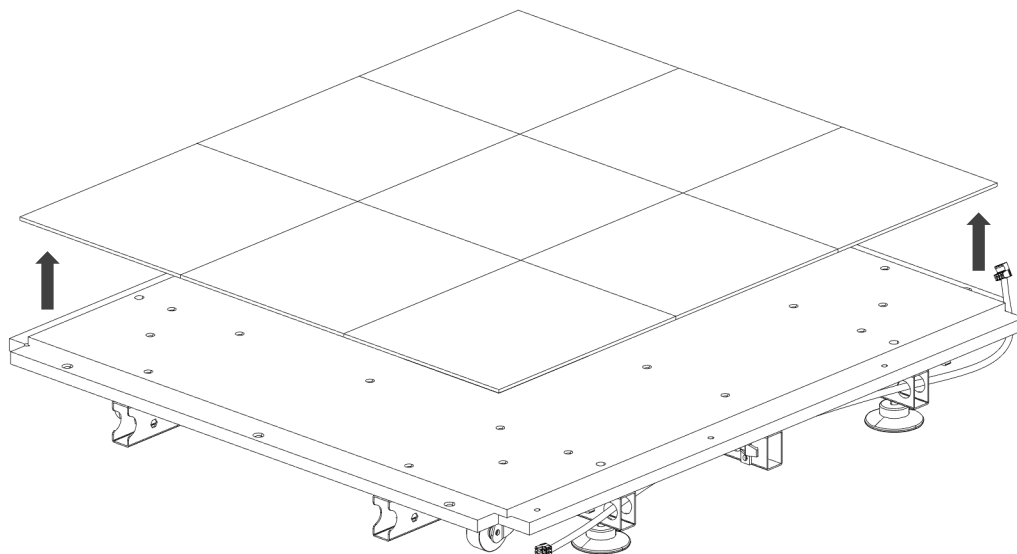

2.

Unscrew the base from the profiles.

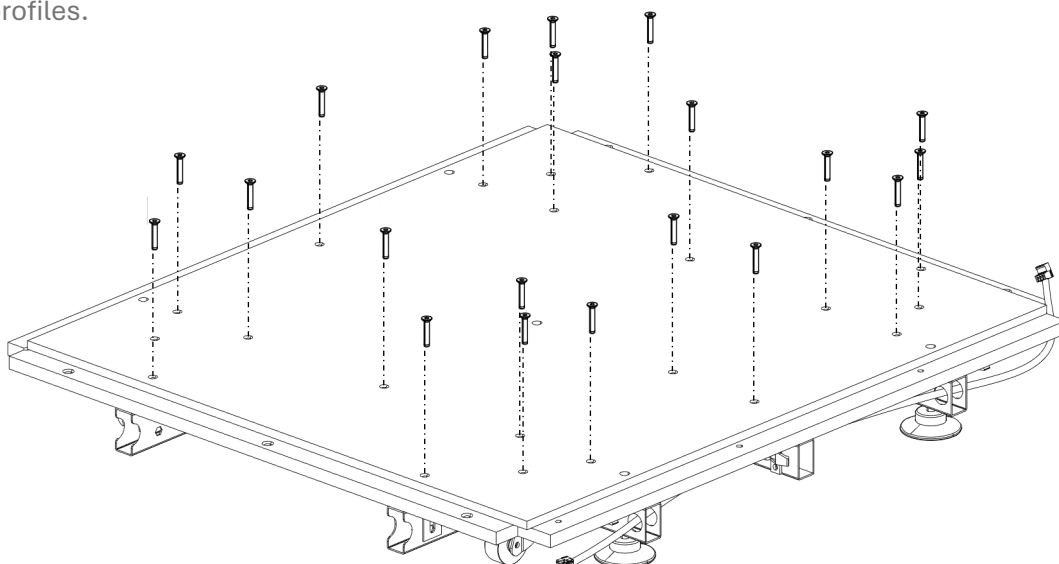


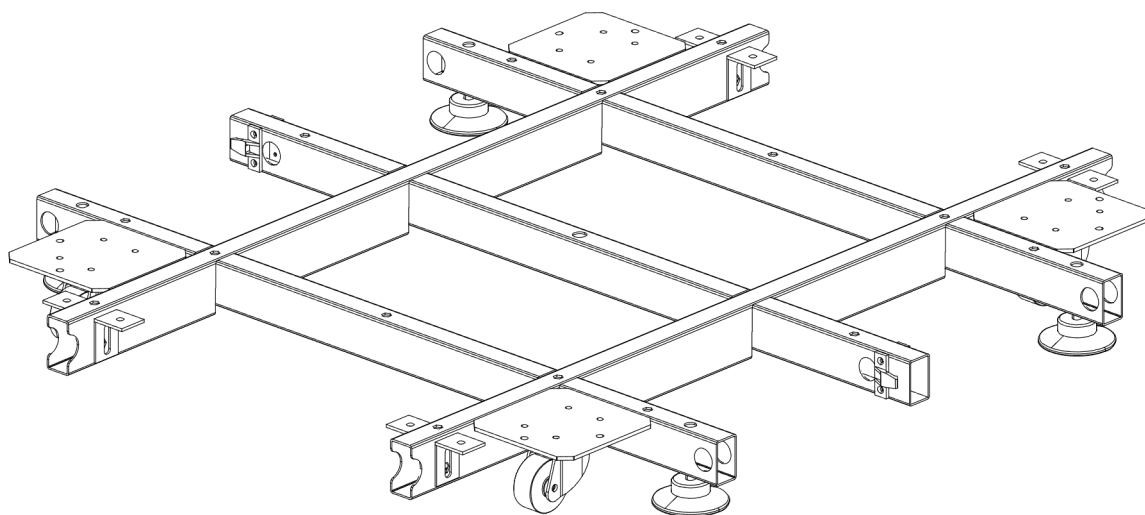3.

Screw on both sides.



4.

Flip on both sides.

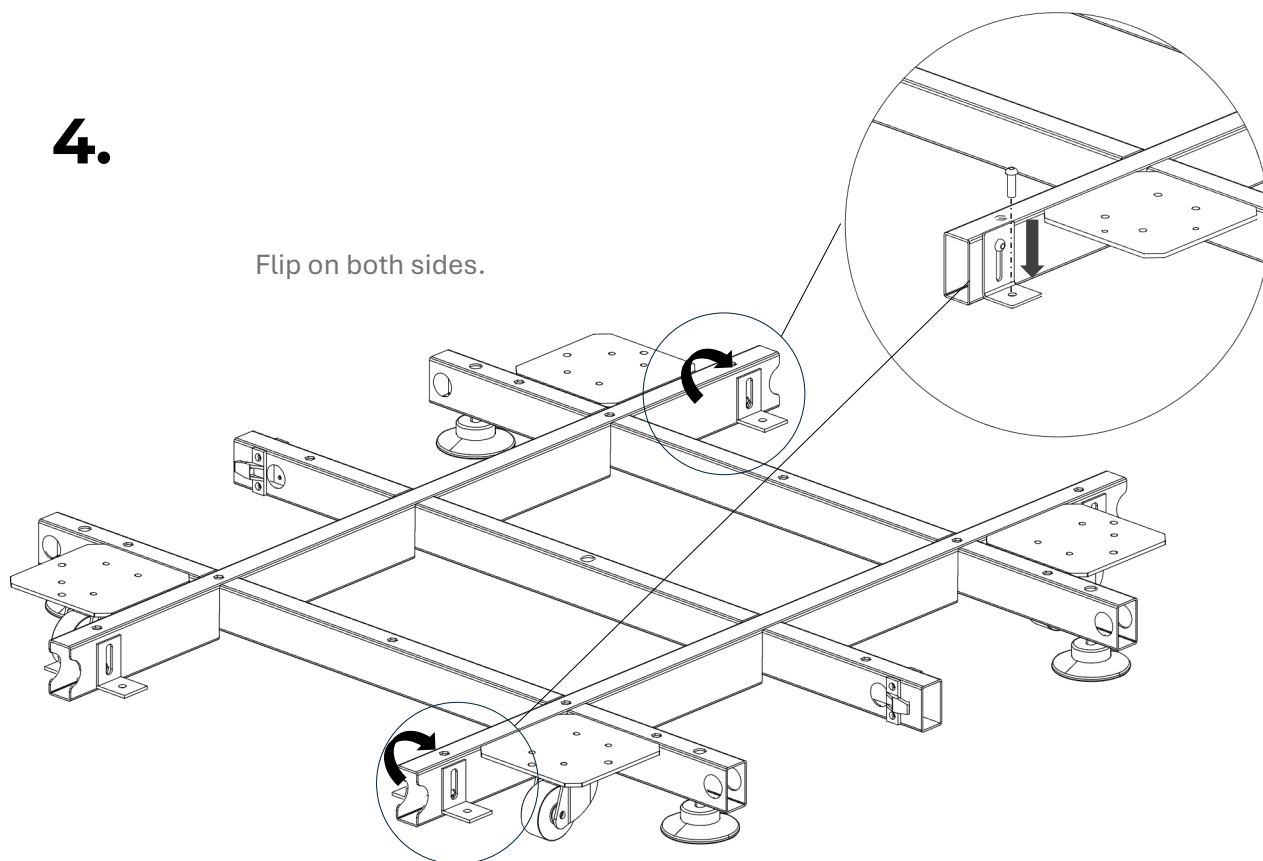


5.

Screw the base back onto the profiles.

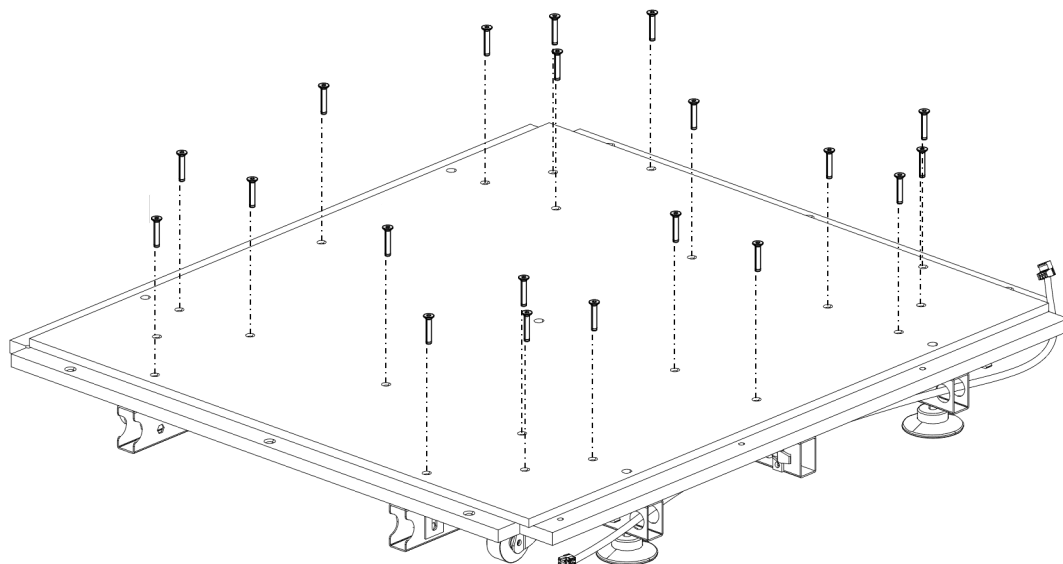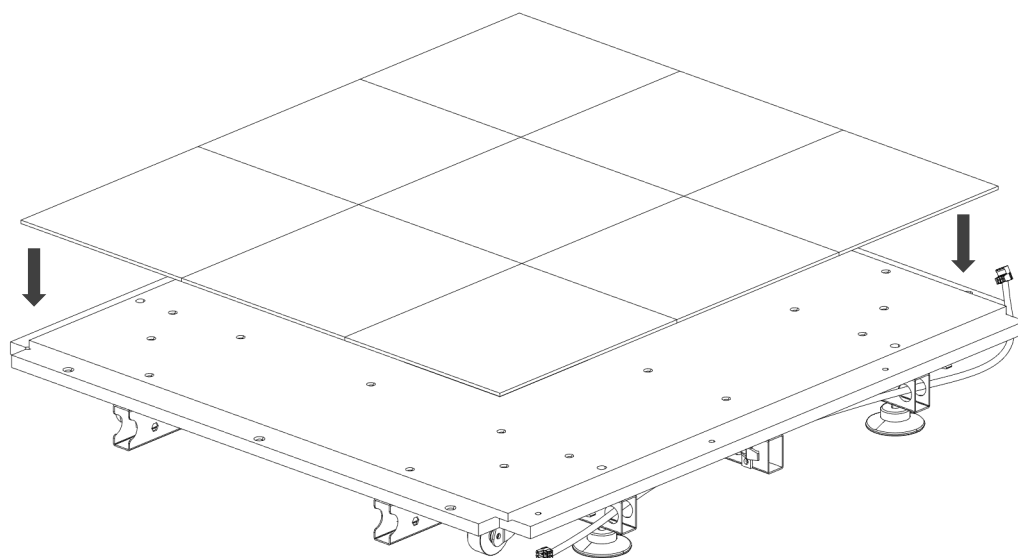
**6.**

8.0 – Power Inlet Direction

1.

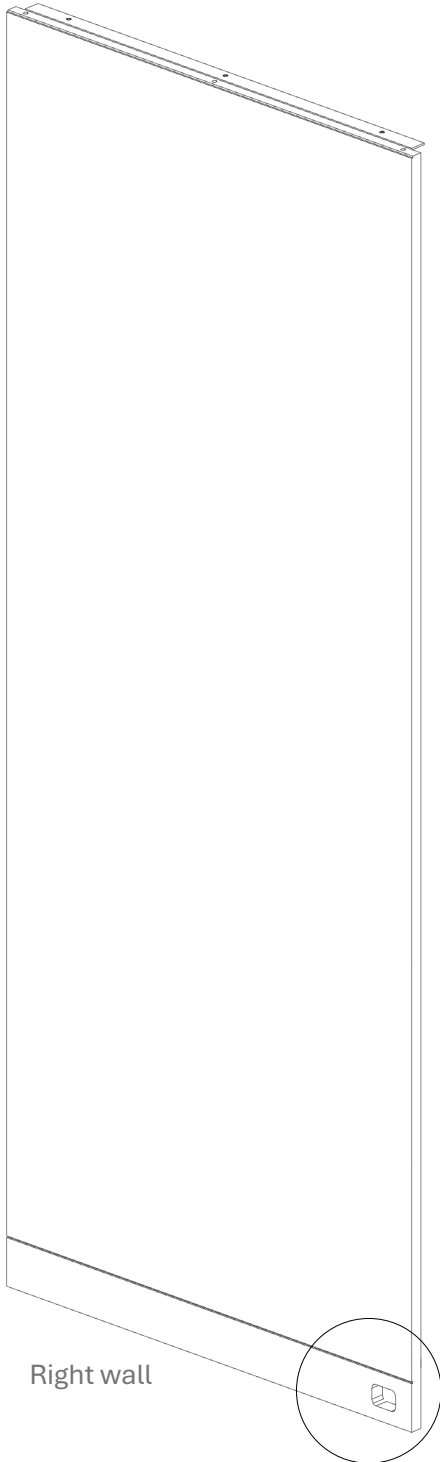

Calma provides flexibility on the direction of the power inlet socket.

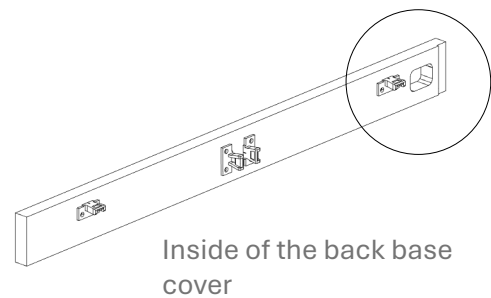


2.

Right wall


For the remainder of the installation manual, **option A** will be presented.



4x

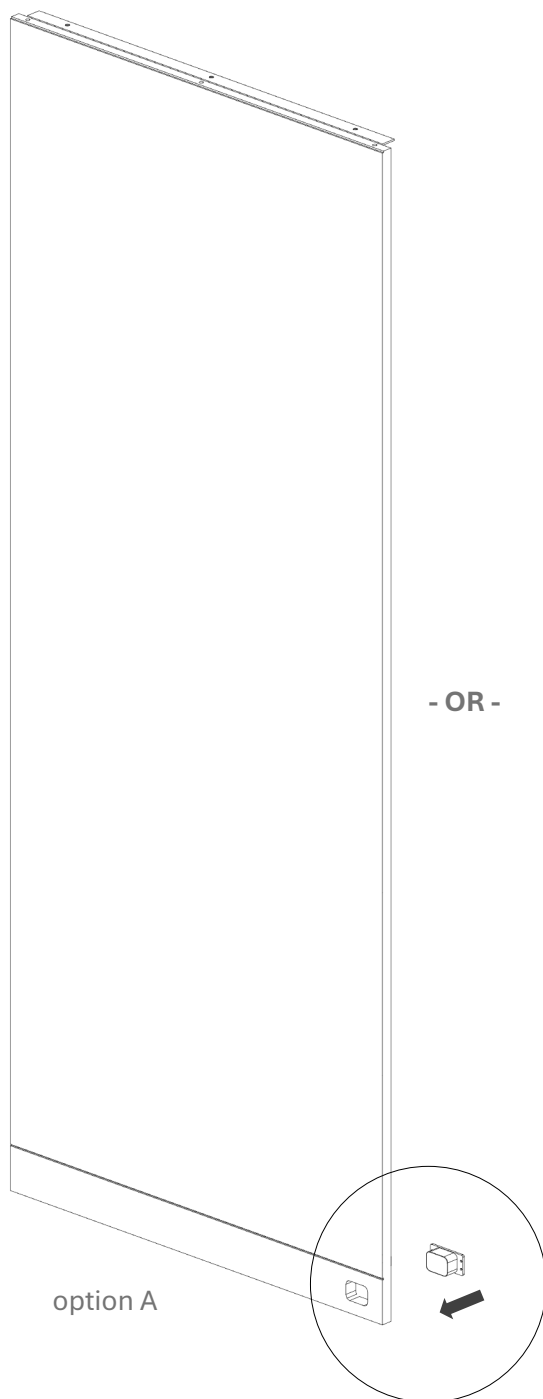

- OR -

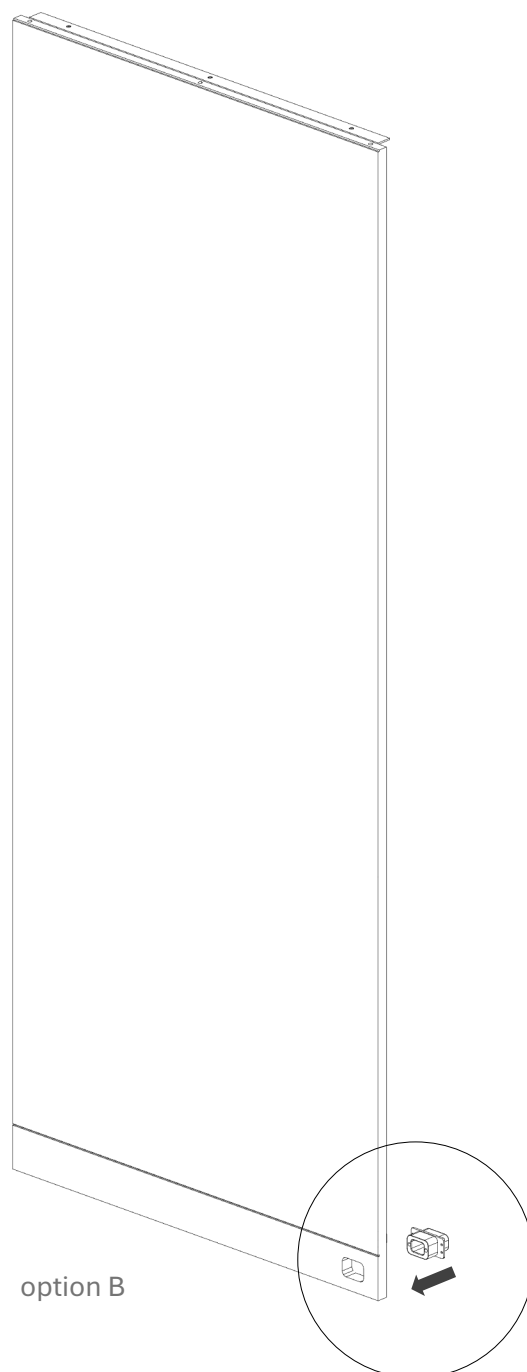

If you choose to screw the power outlet on **the wall**, the exit will be on **the right side** of the pod.


3.

Inside of the back base
cover


For the remainder of the installation manual,
option B will be presented.



4x

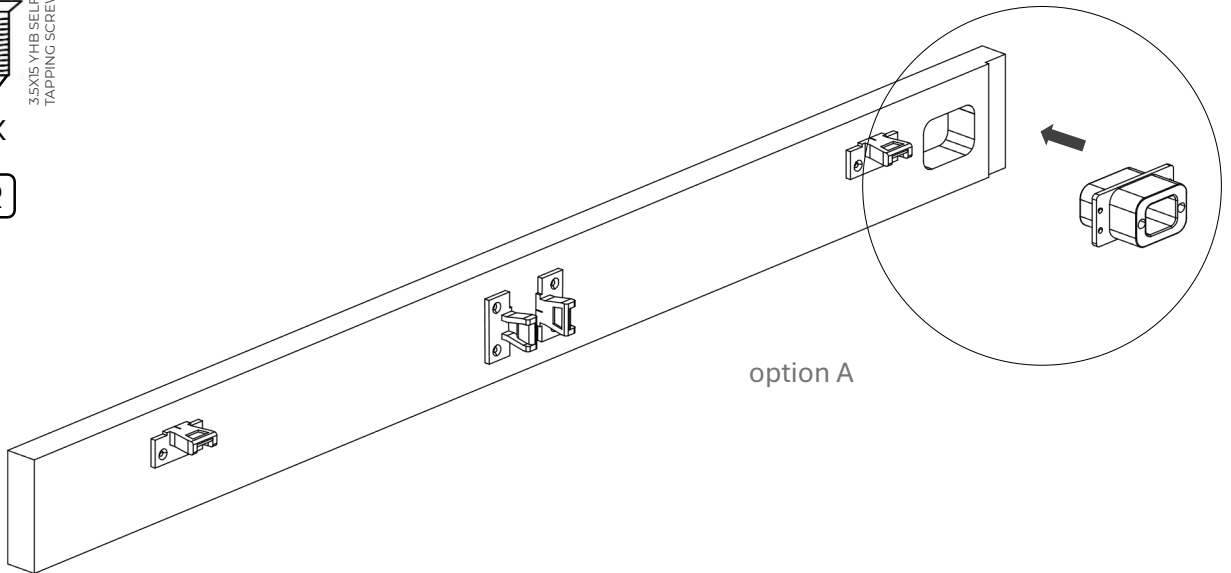

- OR -

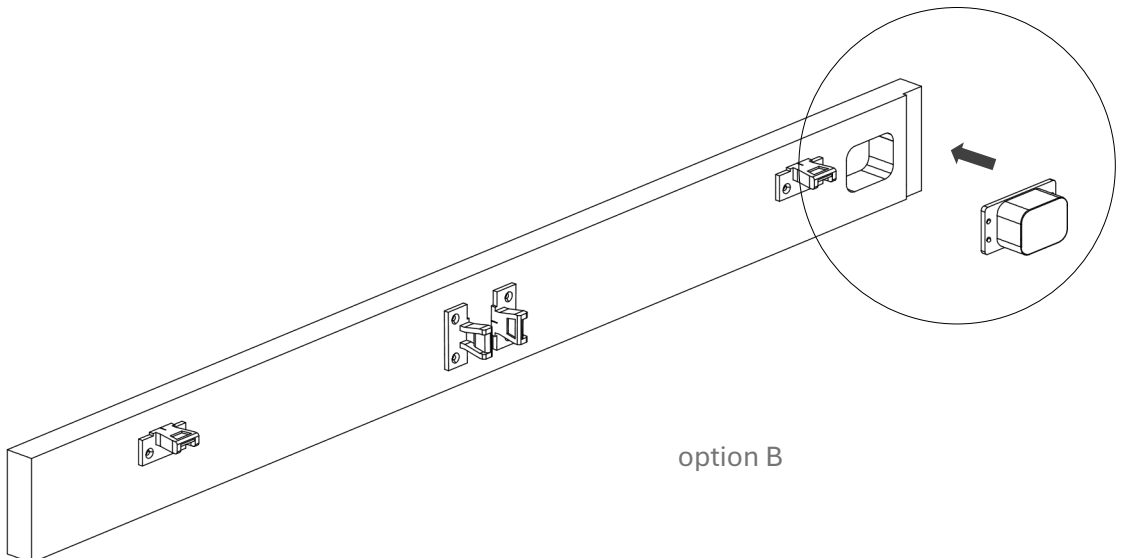



If you choose to screw the power outlet
on **the base**, the exit will be on **the
back side** of the pod.

9.0 – Begin Installation




1.

1. SUB_1
2. SUB_2

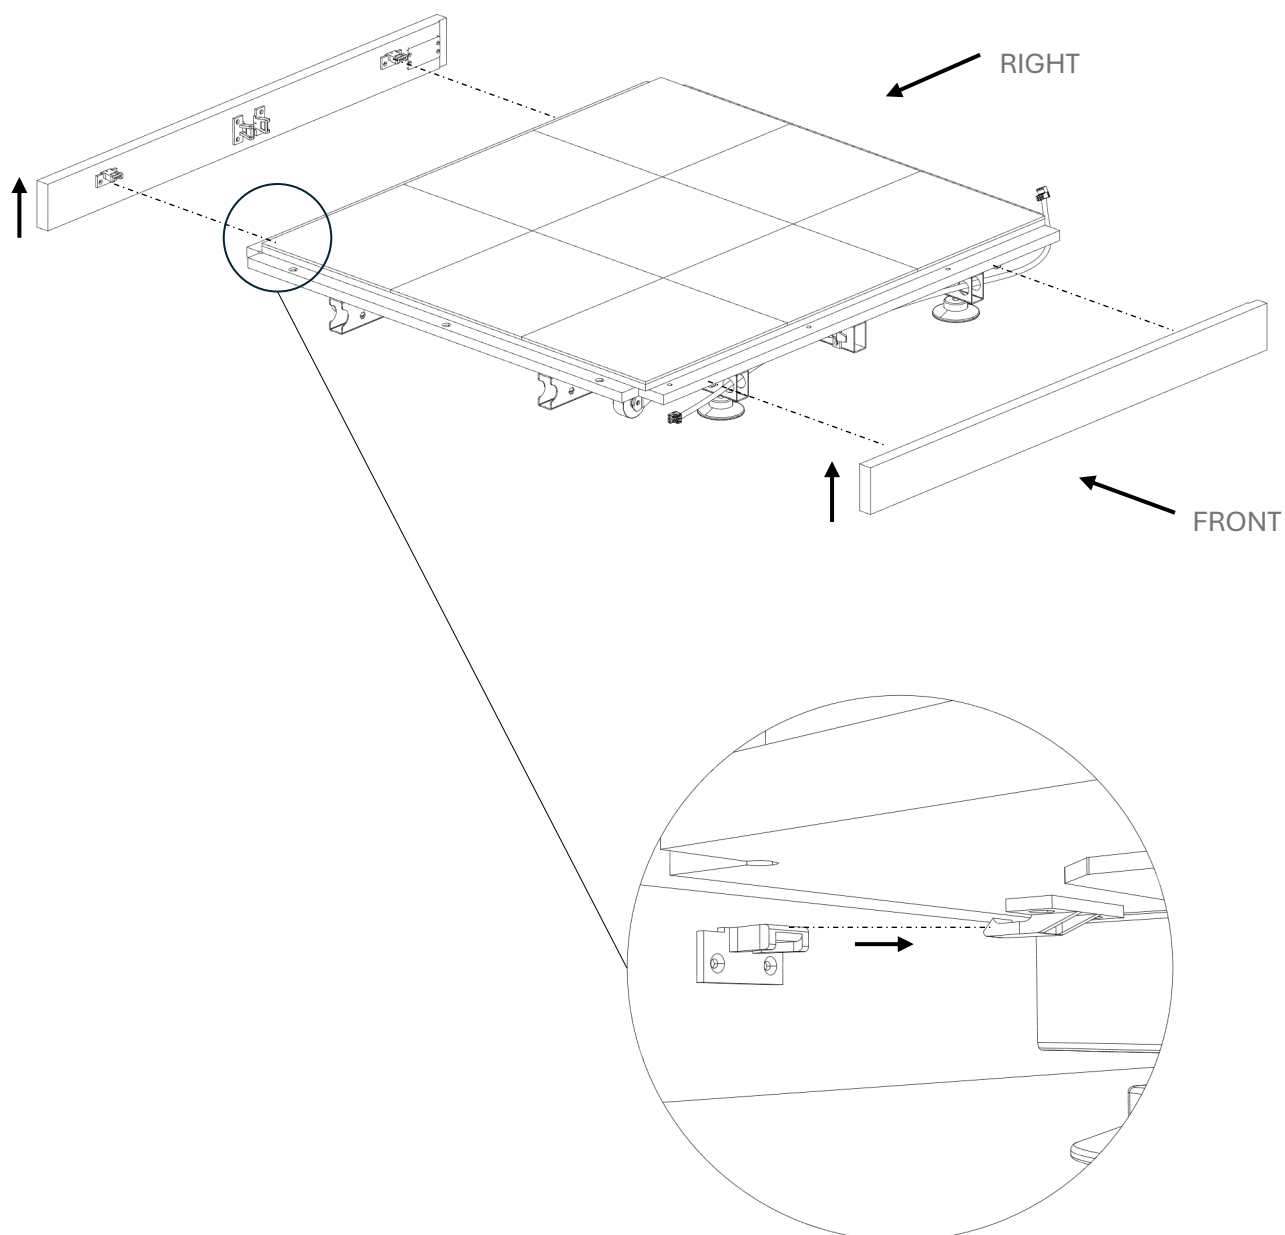

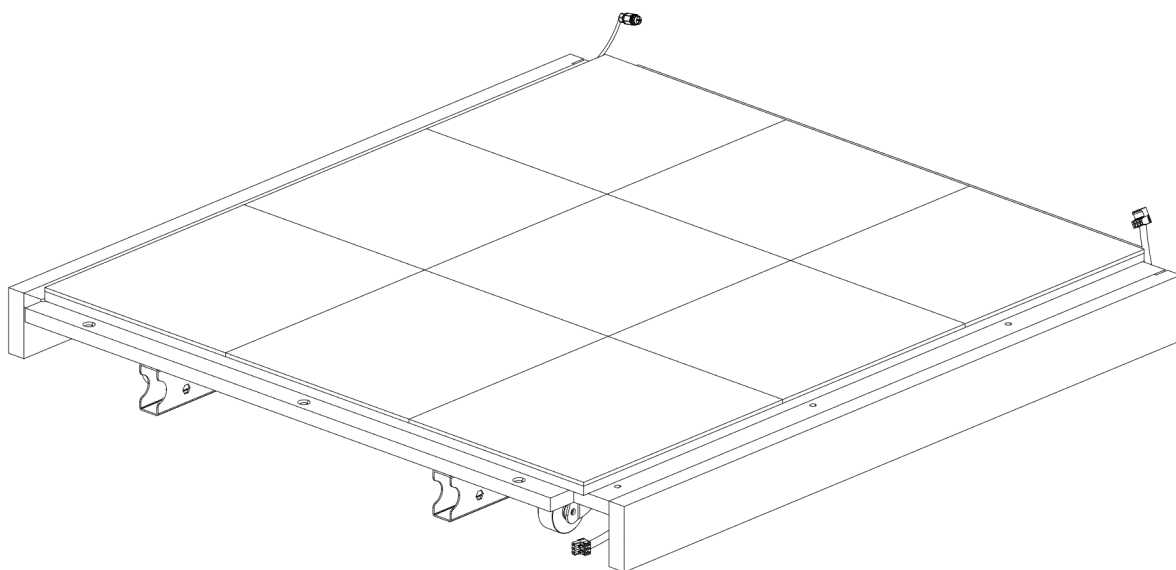2.**3.**


ALLEN KEY
(5 mm)

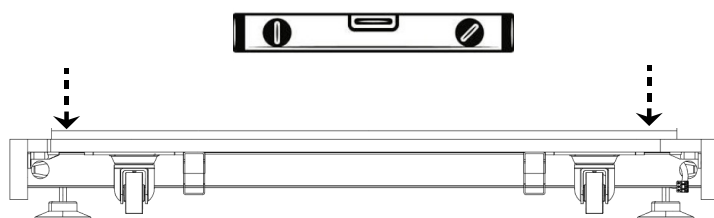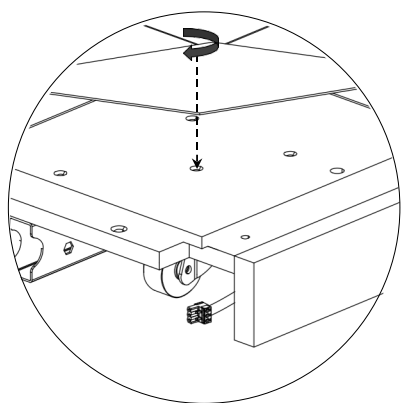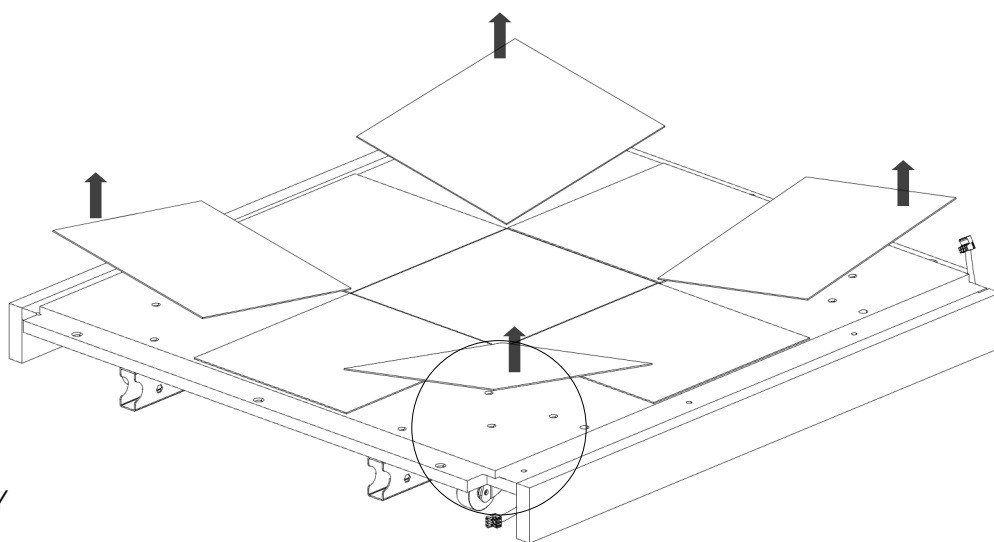

* Use a leveling tool to ensure the floor is perfectly horizontal to the ground.


4.

3. SUB_3




The right wall can be identified from the holes on the wall.

! ATTENTION: ensure that the cable is placed on top of the floor when installing.

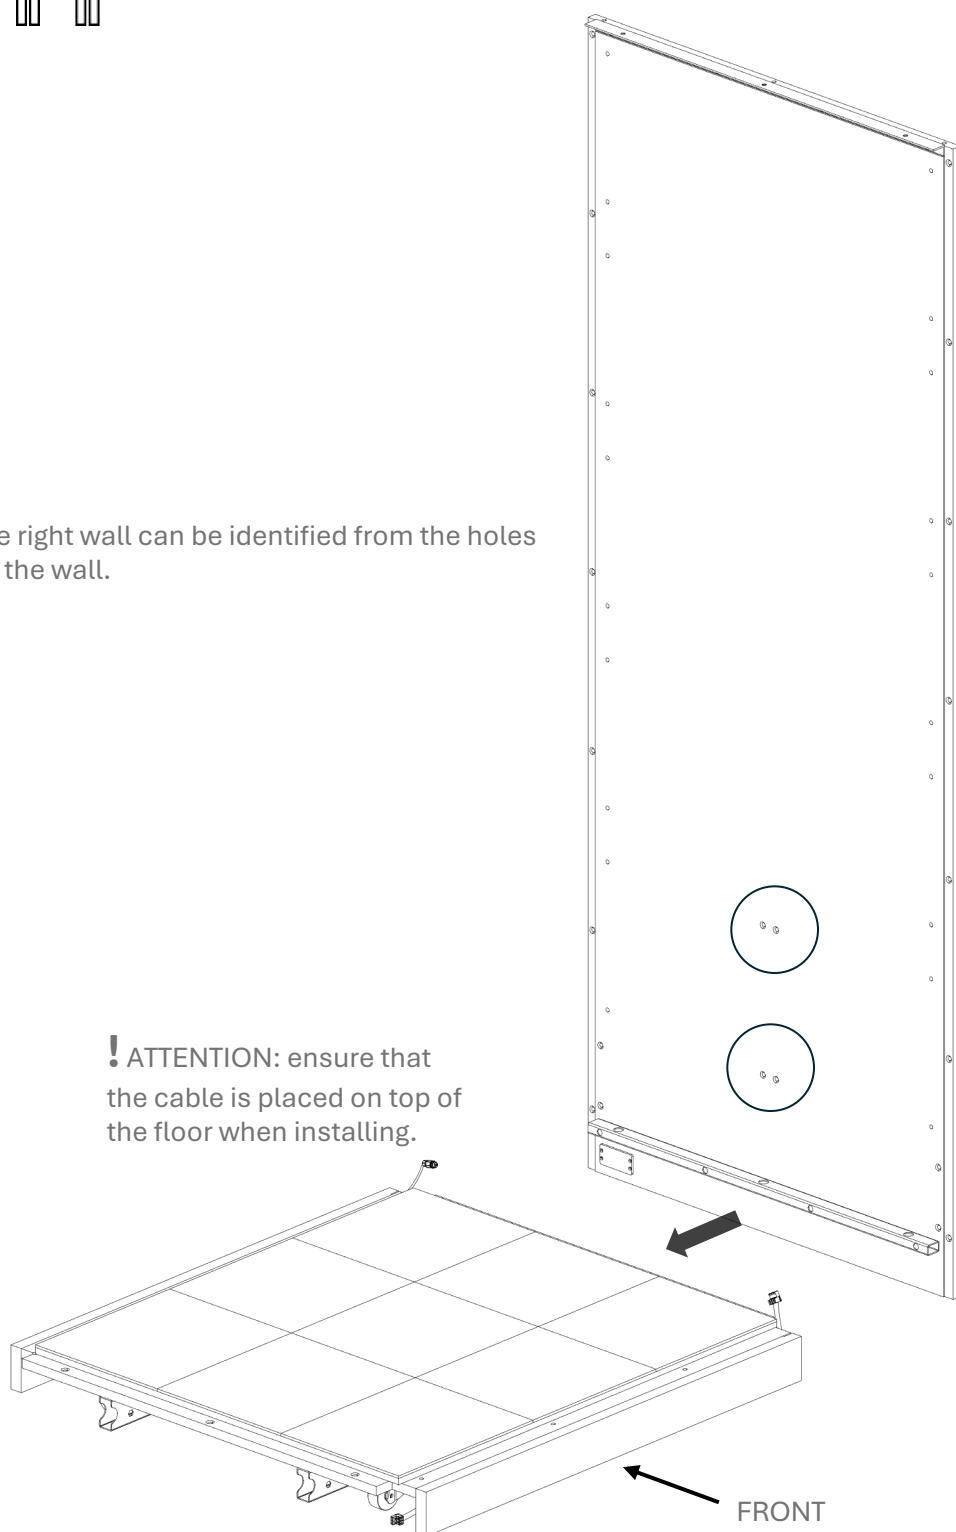

5.


3. SUB_3



3x


ALLEN
(6 mm)POWER
TOOL

WARNING the wall should be supported by a second person as the other wall is installed in the next step.

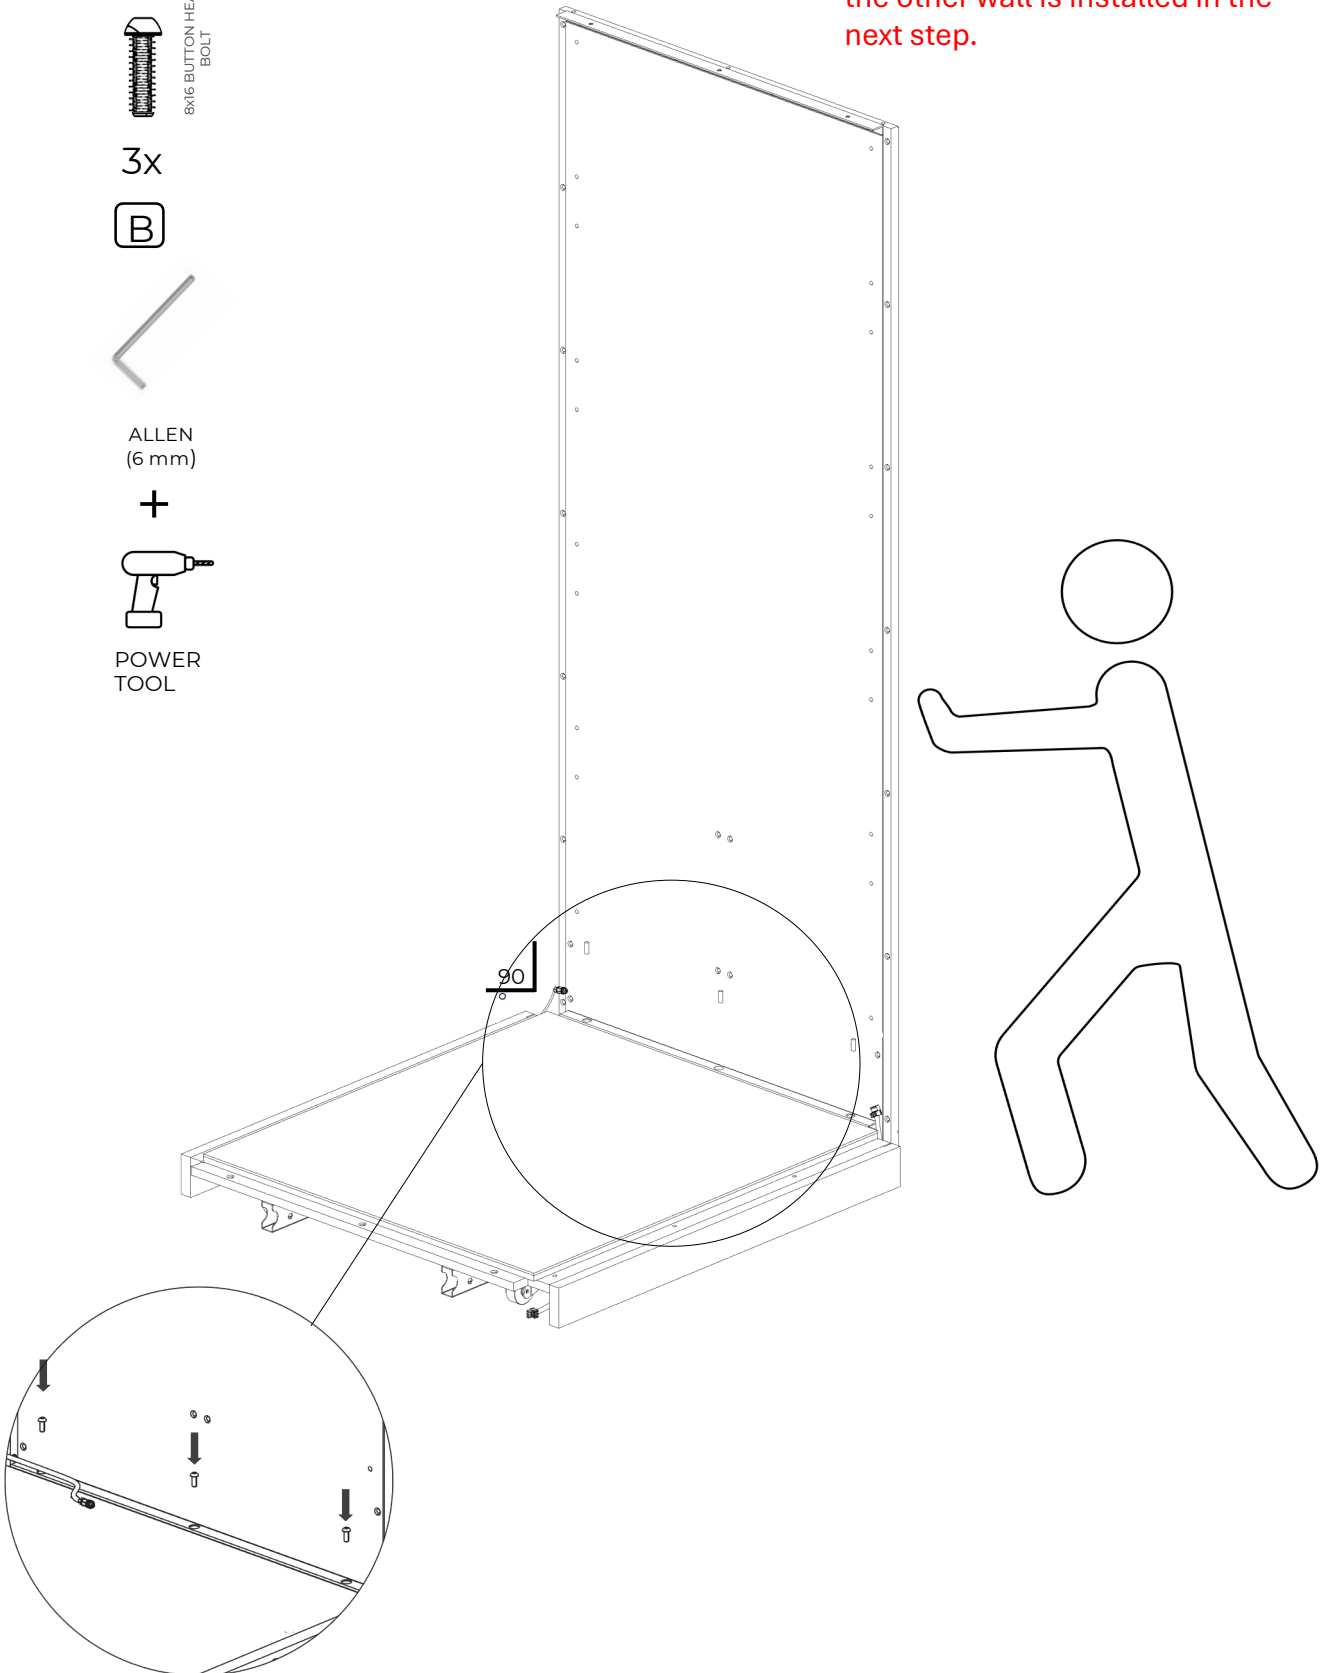


6.

4. SUB_4




WARNING the **right** wall should be supported by a second person as the back wall is installed.

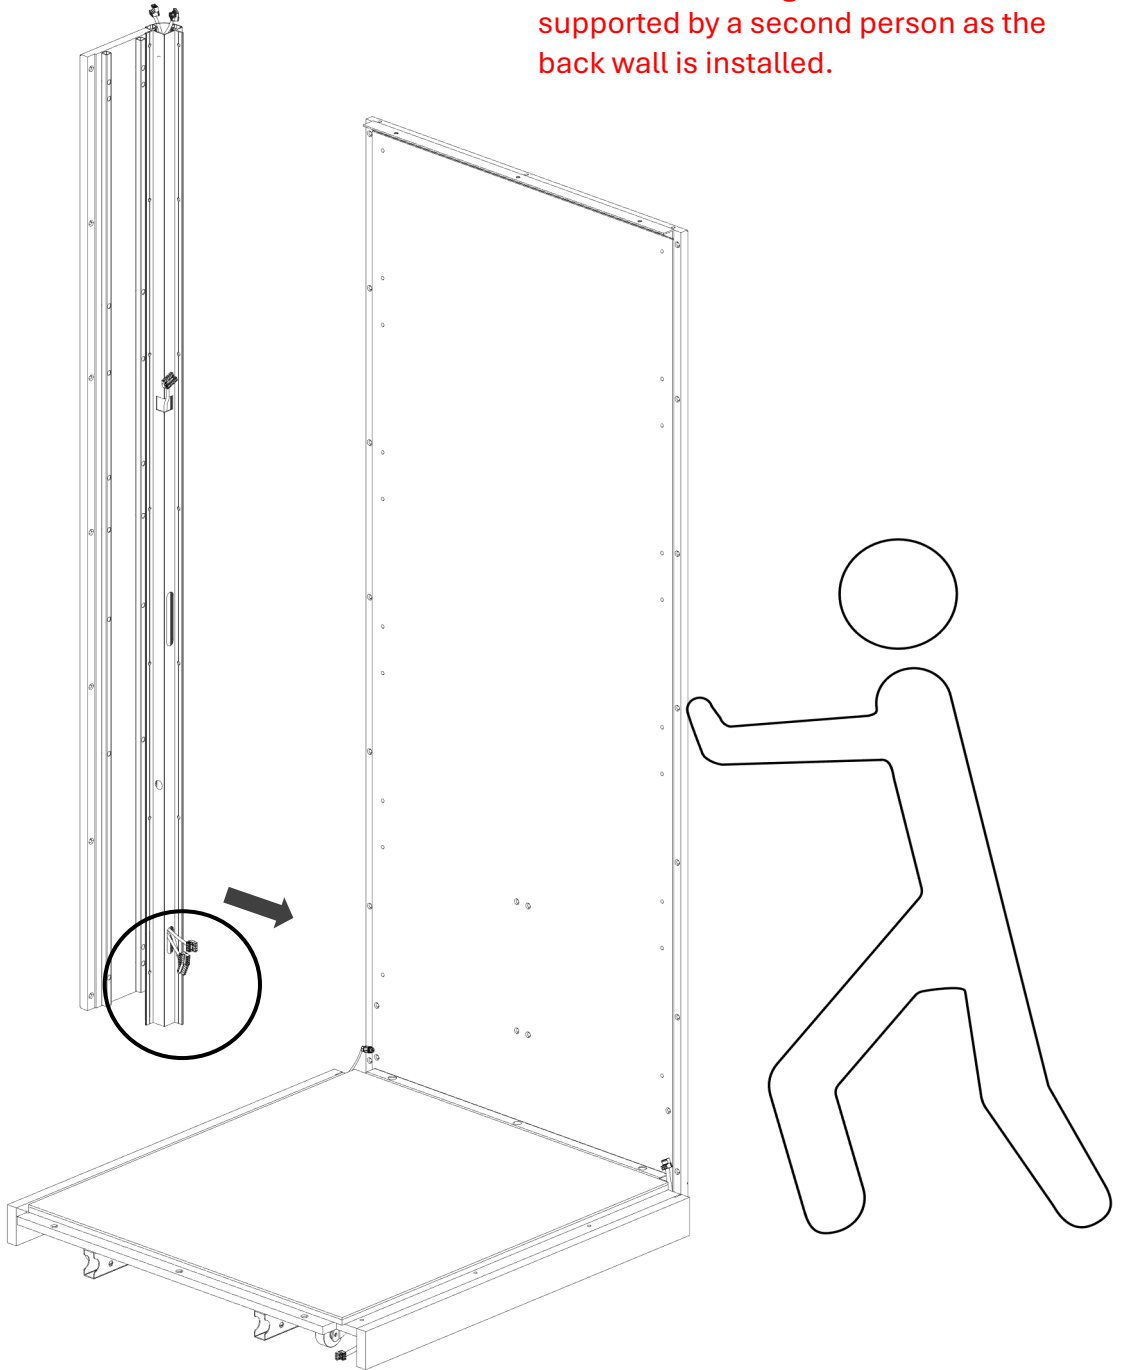


7.

4. SUB_4


6x12 FLAT HEAD
SCREW

7x

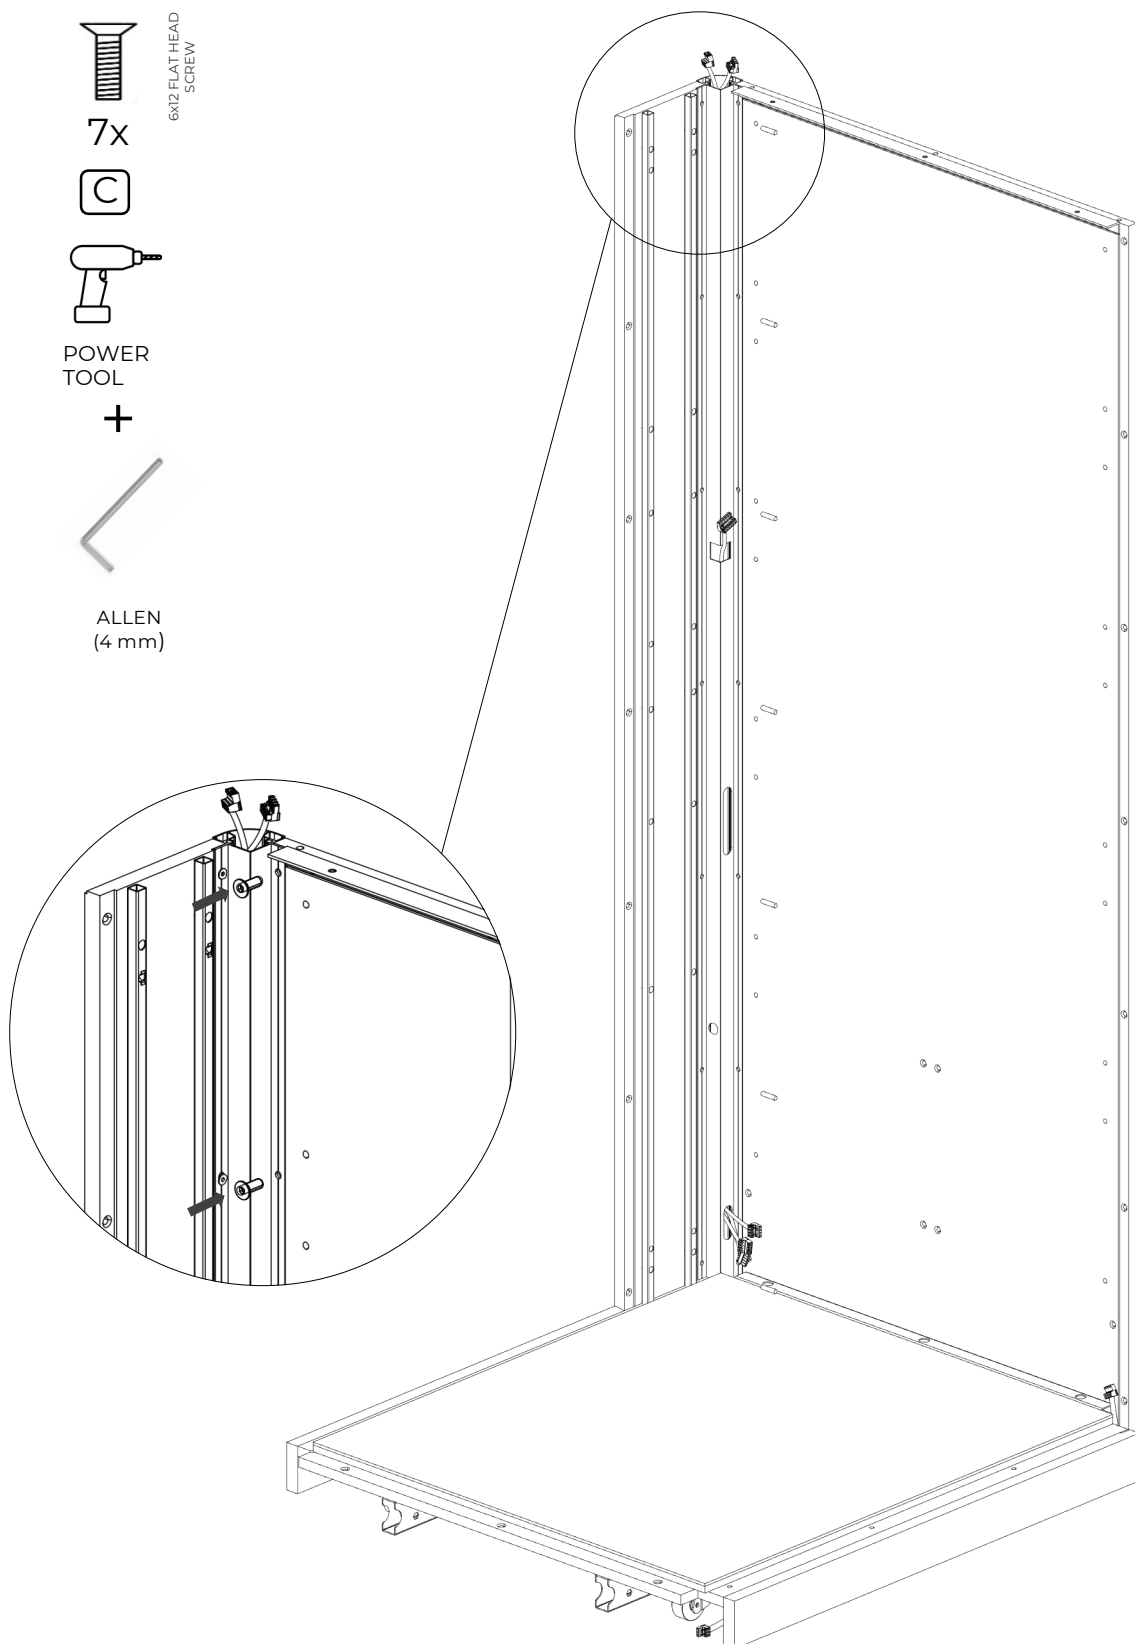POWER
TOOLALLEN
(4 mm)

8.


5. SUB_5

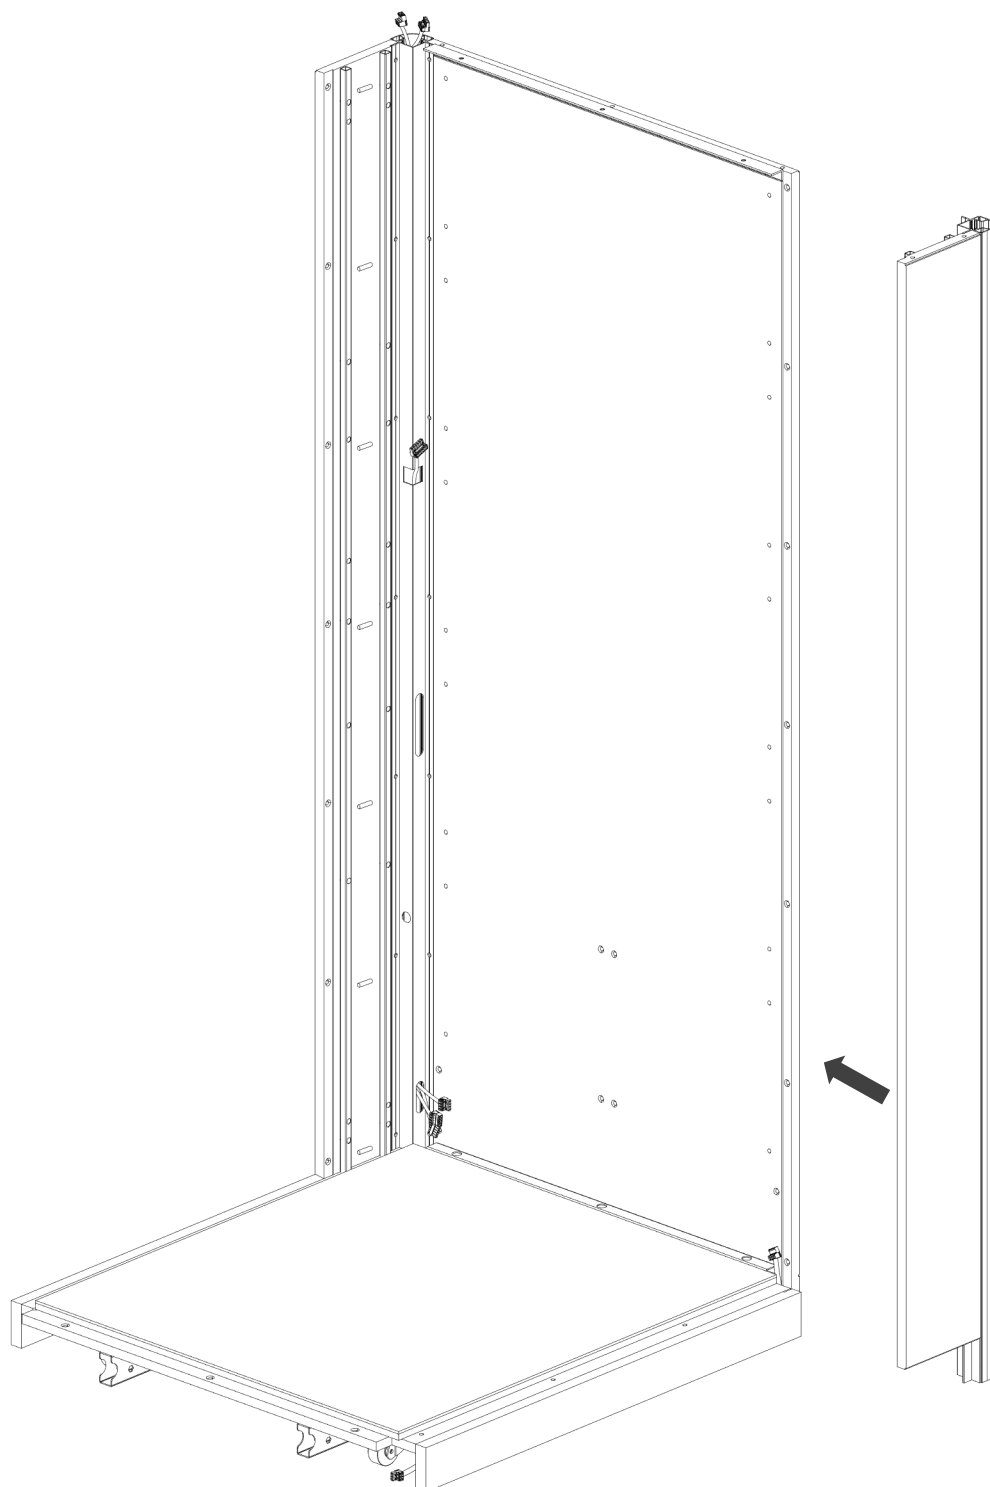**!**


ATTENTION: ensure that the cable is placed on top of the floor when installing.

9.

5. SUB_5

6x12 FLAT HEAD HEX
SCREW




7x

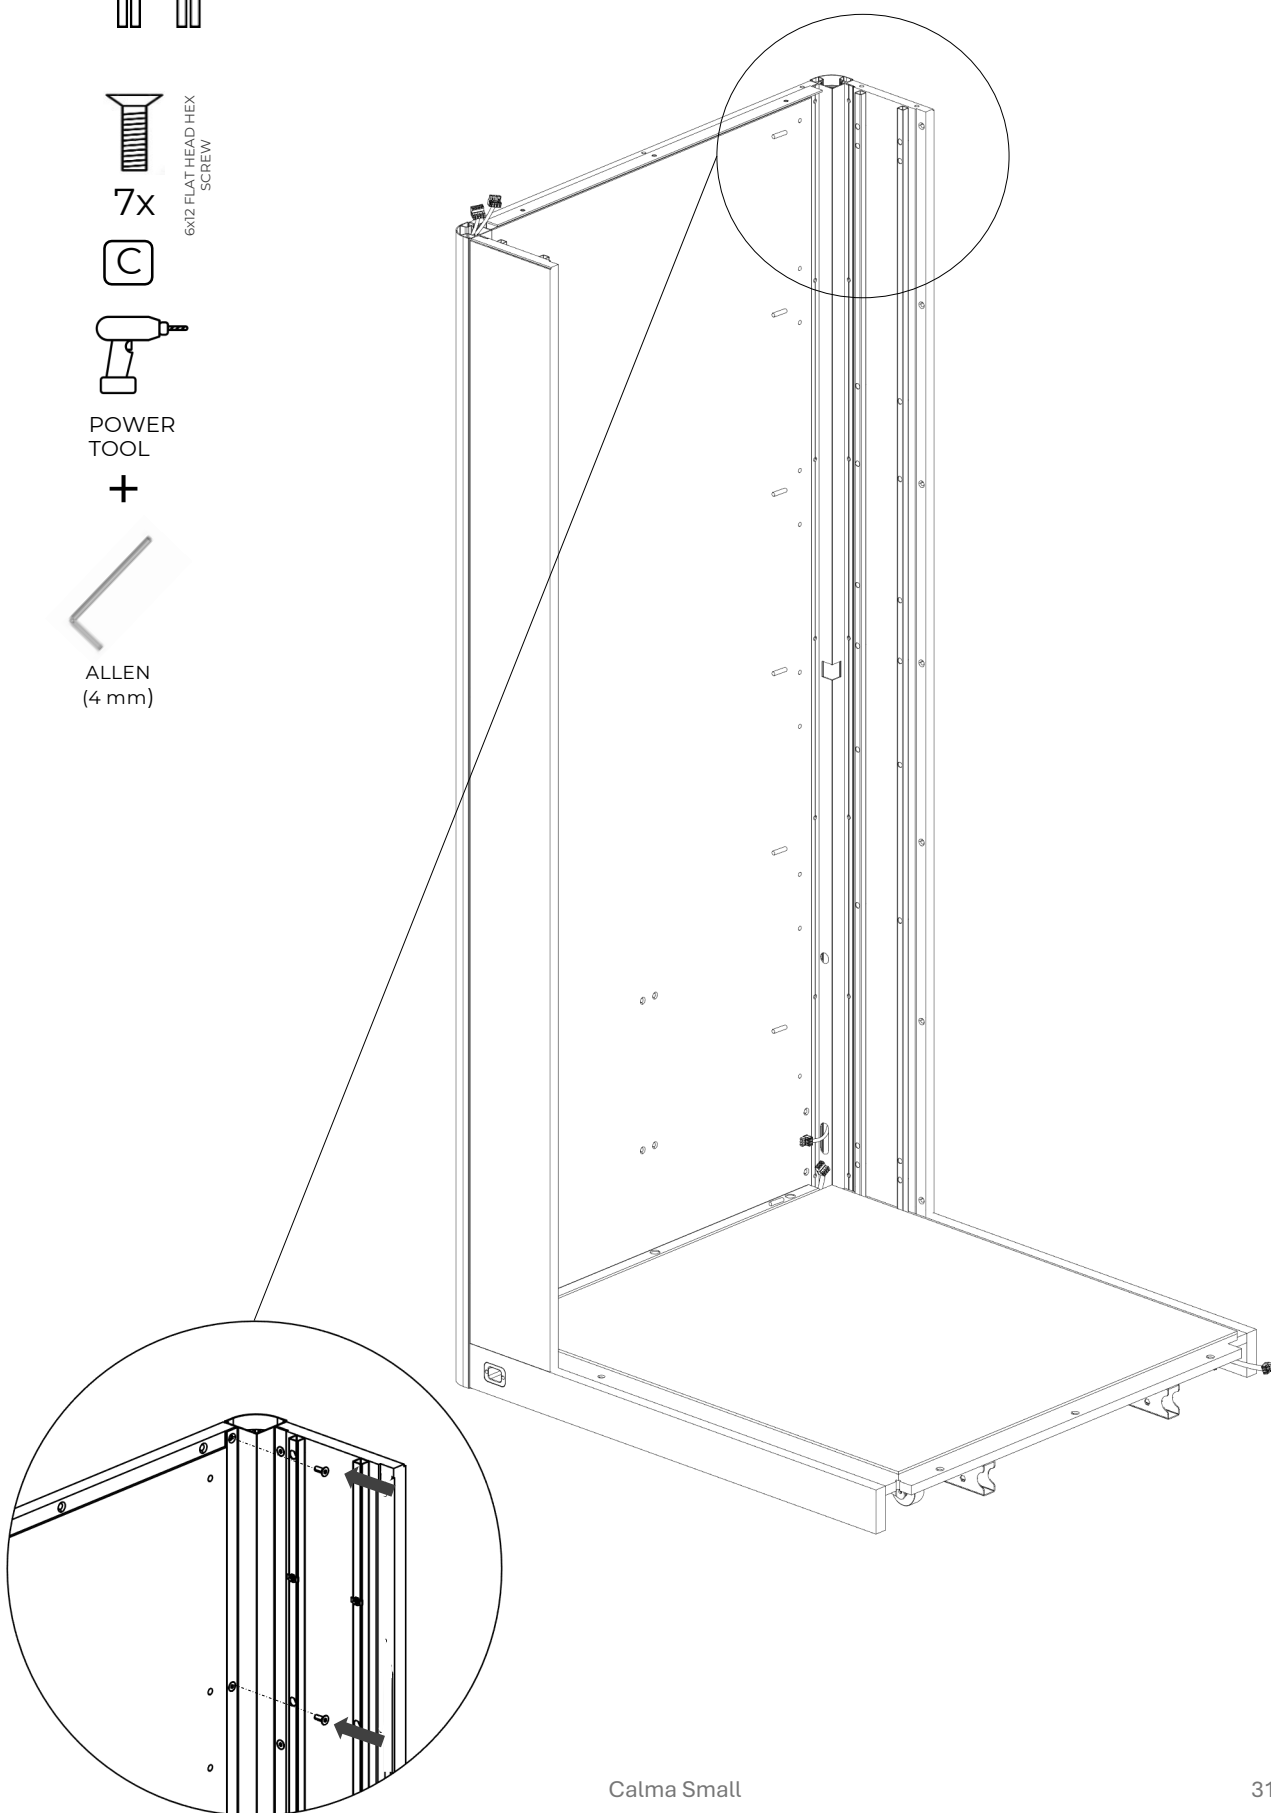POWER
TOOLALLEN
(4 mm)

10.

6. SUB_6


The bolt in the floor is to be used for aligning the window.

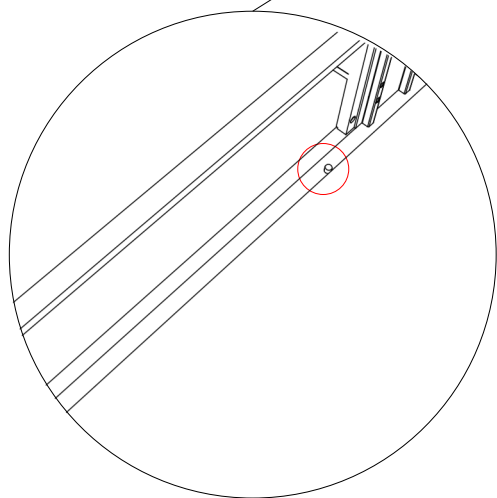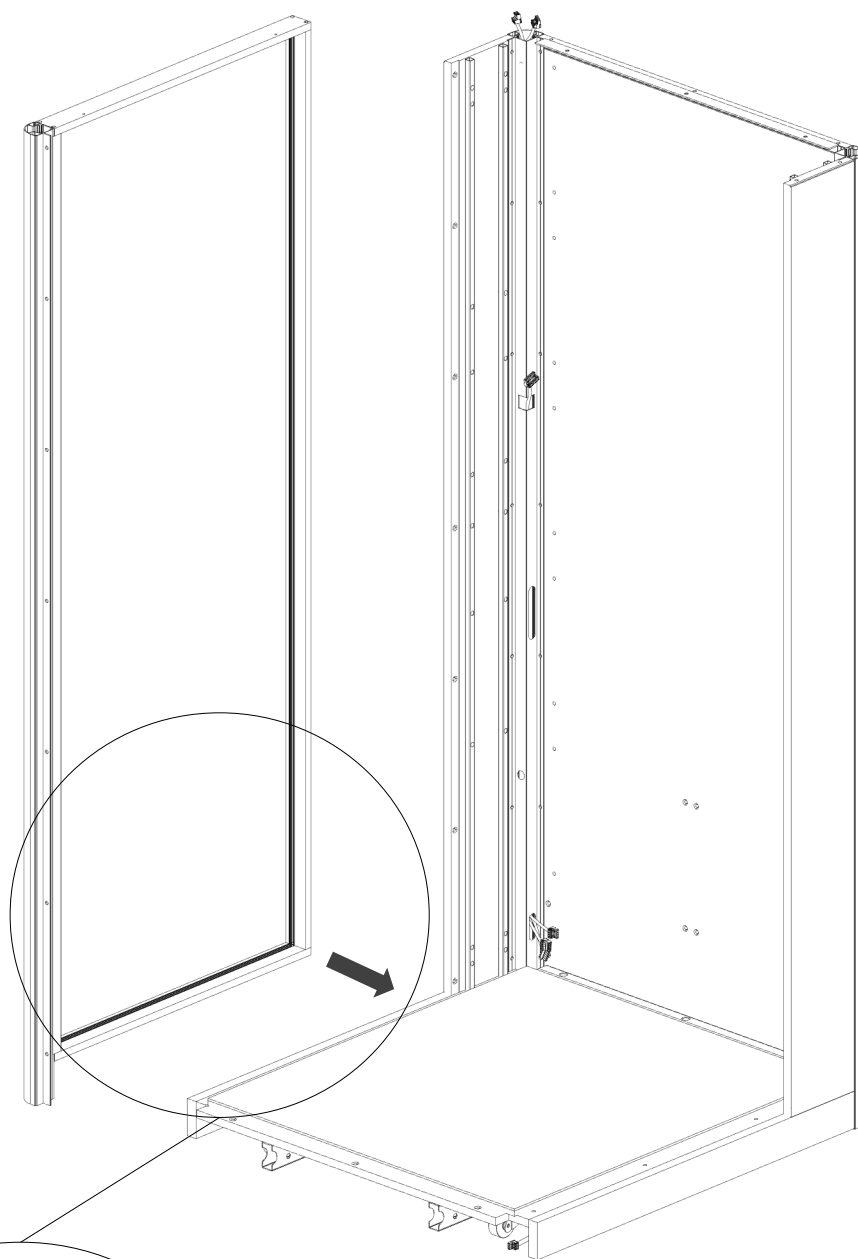

When placing the window, ensure that the panel is placed on the screw that is on the base.

11.



6. SUB_6

6x12 FLAT HEAD HEX
SCREW

7x

POWER
TOOL

+

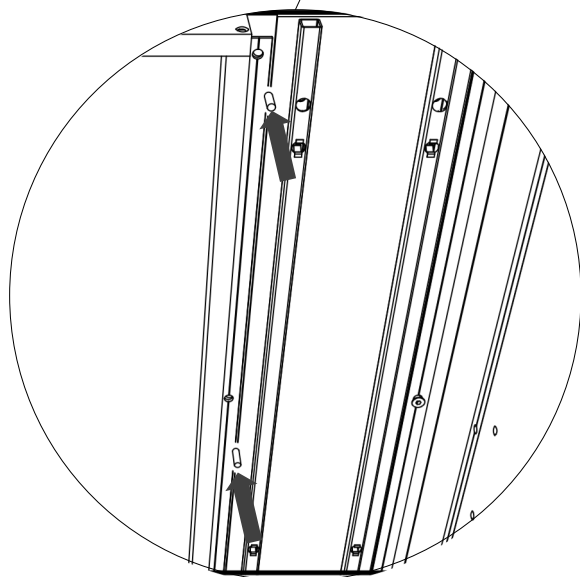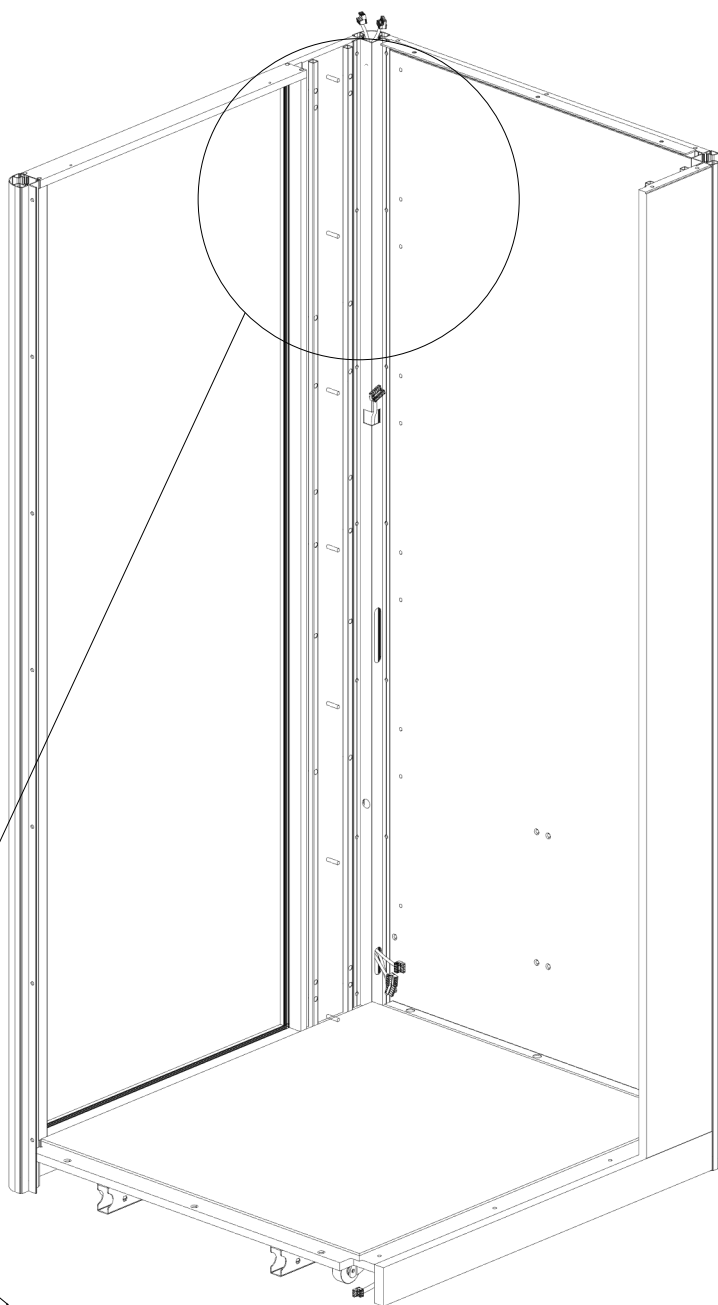ALLEN
(4 / 6 mm)

12.

7. SUB_7




13.

7. SUB_7

6x12 FLAT HEAD HEX
SCREW


7x

C


8x16 HEX SOCKET
BUTTON HEAD SCREW

3x



B

POWER
TOOL


+

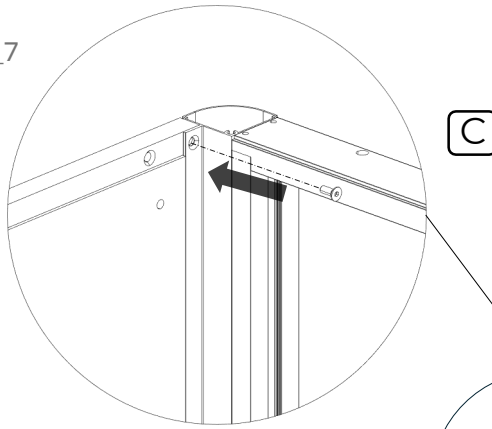ALLEN
(4 / 6 mm)

C



B

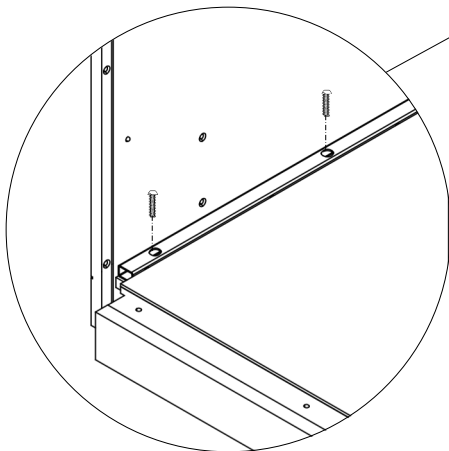


14.

8. SUB_8





WARNING be sure to keep a **strong grip** on the door module until it is fully installed.

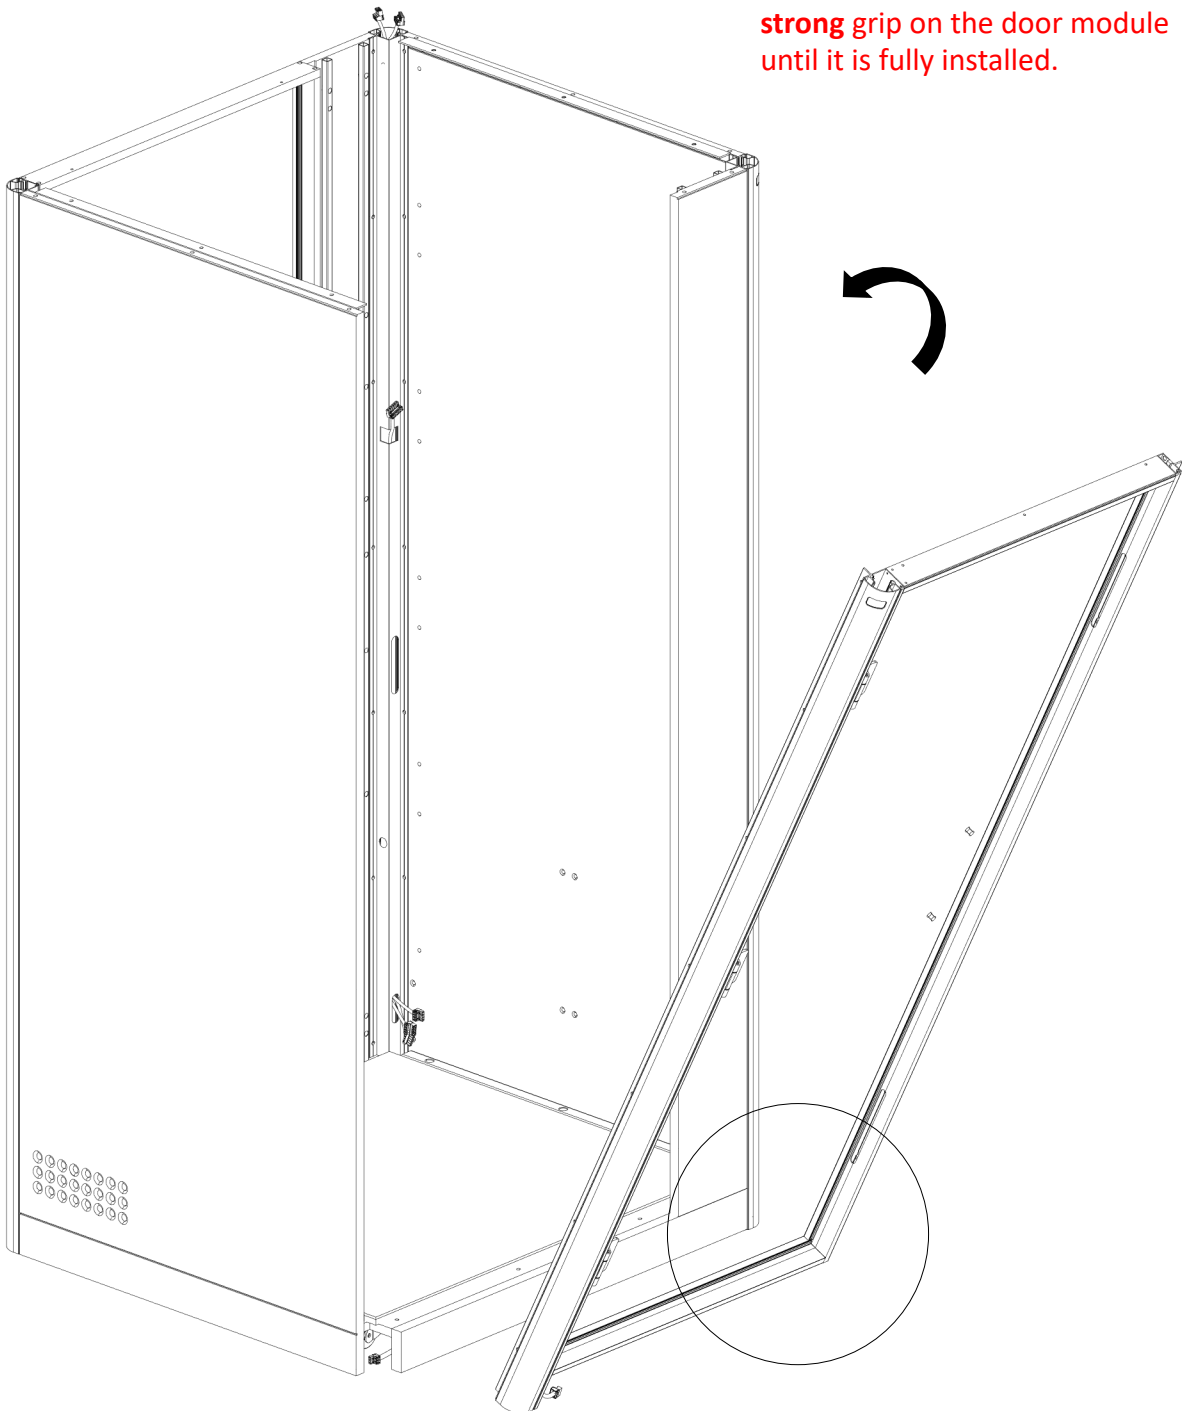



When placing the door, insert the **right** corner at an angle to ensure it is positioned correctly.

15.

8. SUB_8

6X12 FLAT HEAD HEX
SCREWPOWER
TOOLALLEN
(4 mm)SUCTION
CUPS

WARNING be sure to keep a
strong grip on the door module
until it is fully installed.

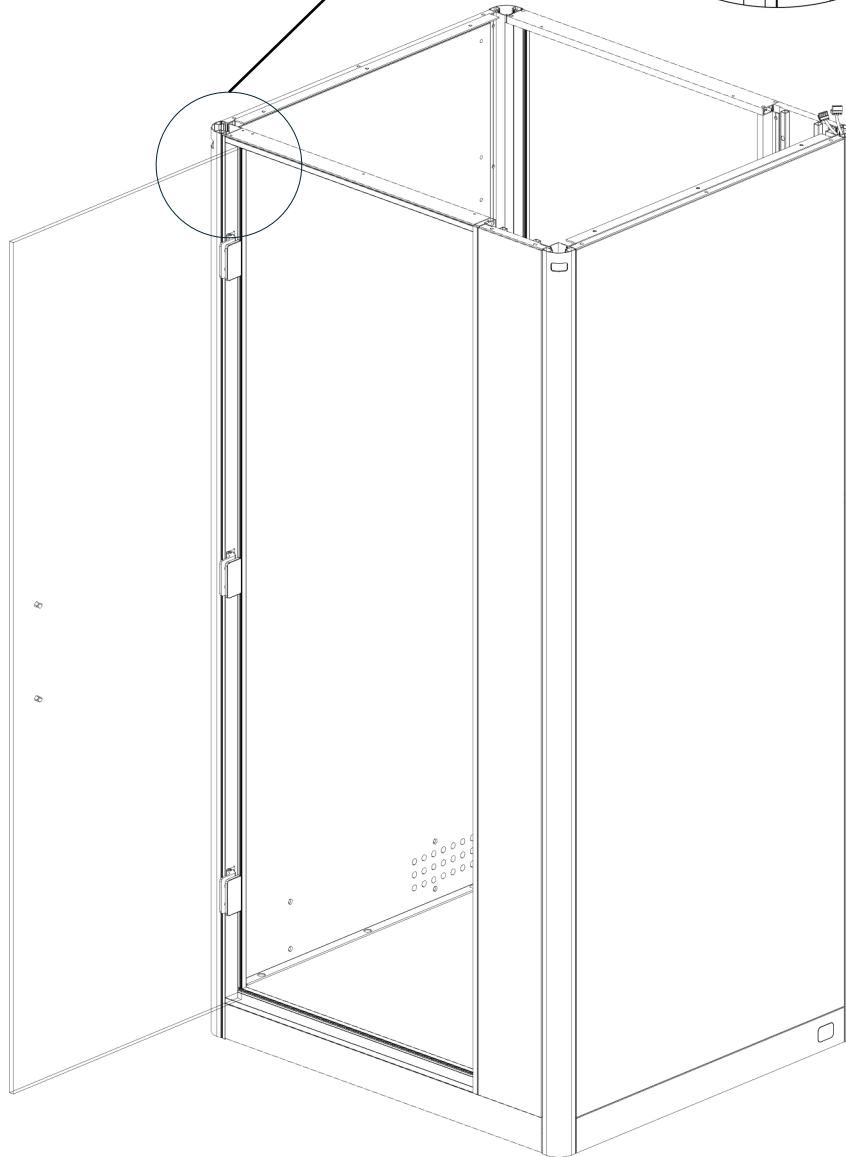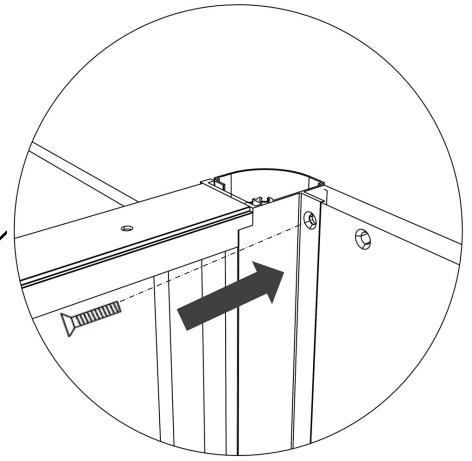

Support the glass door from the
bottom as it is being installed.

16.


8. SUB_8




POWER
TOOL



ALLEN
(4 mm)

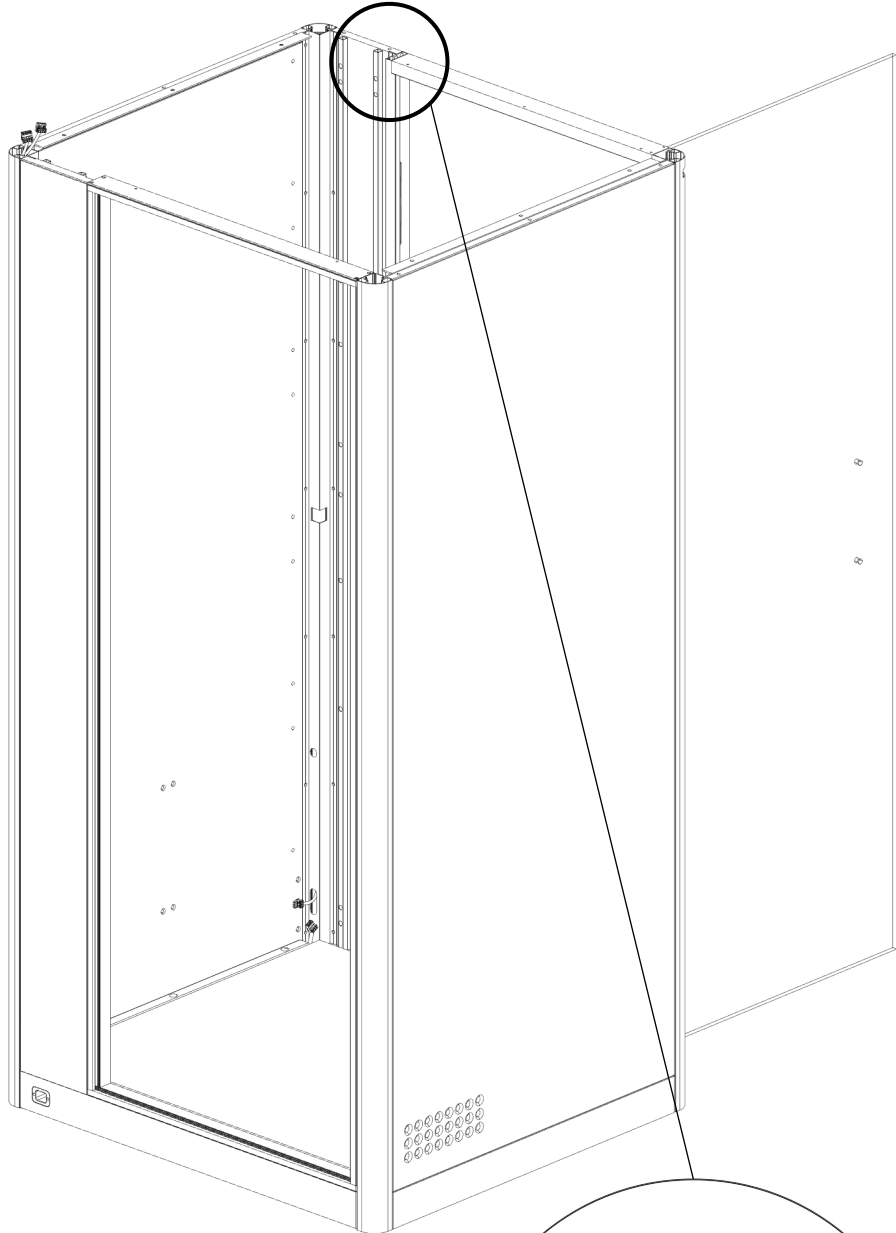

WARNING be sure to keep a strong grip on the door module until it is fully installed.


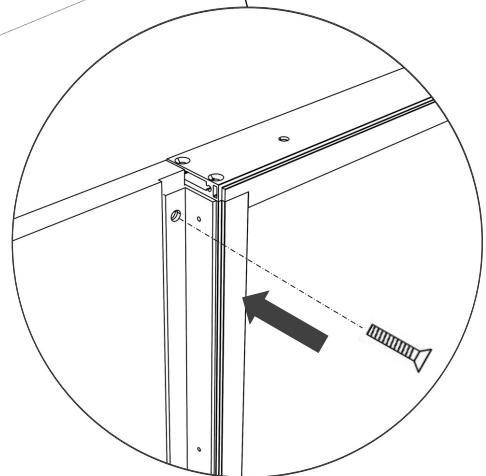


17.


8. SUB_8

6X12 FLAT HEAD HEX
SCREW







2x

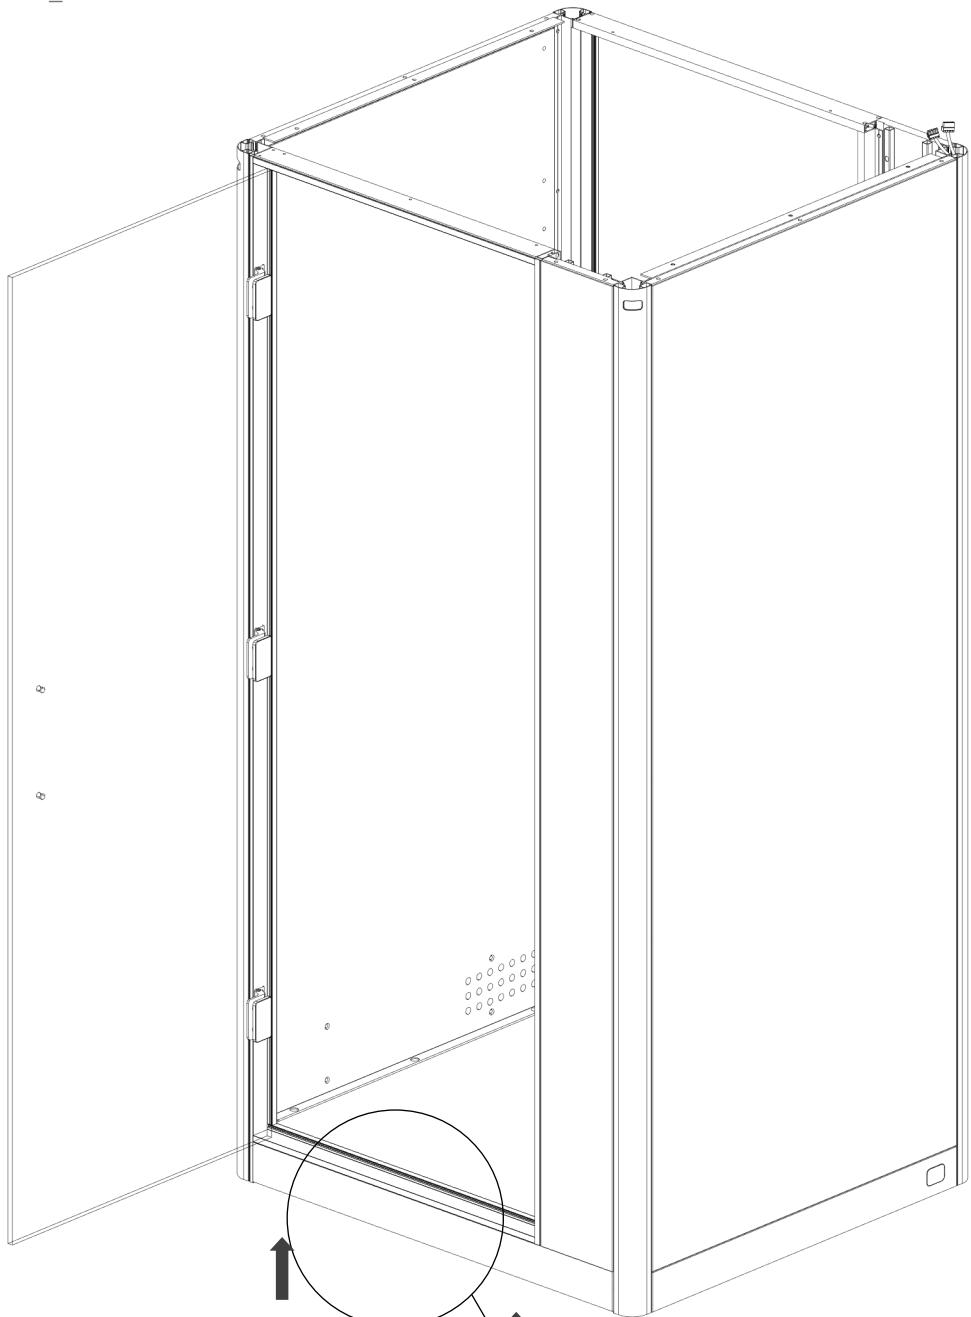POWER
TOOLALLEN
(5 mm)




WARNING be sure to keep a strong grip on the door module until it is fully installed.

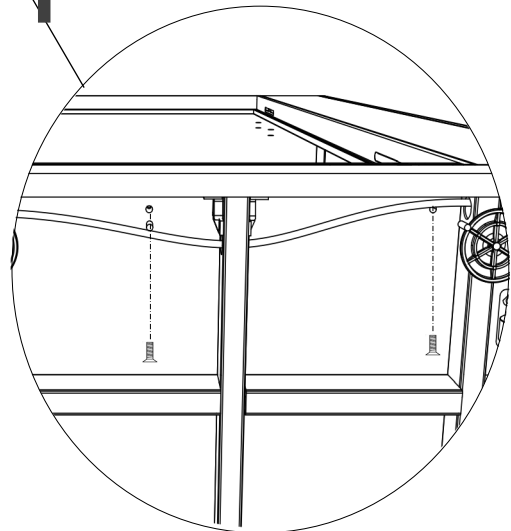








18.

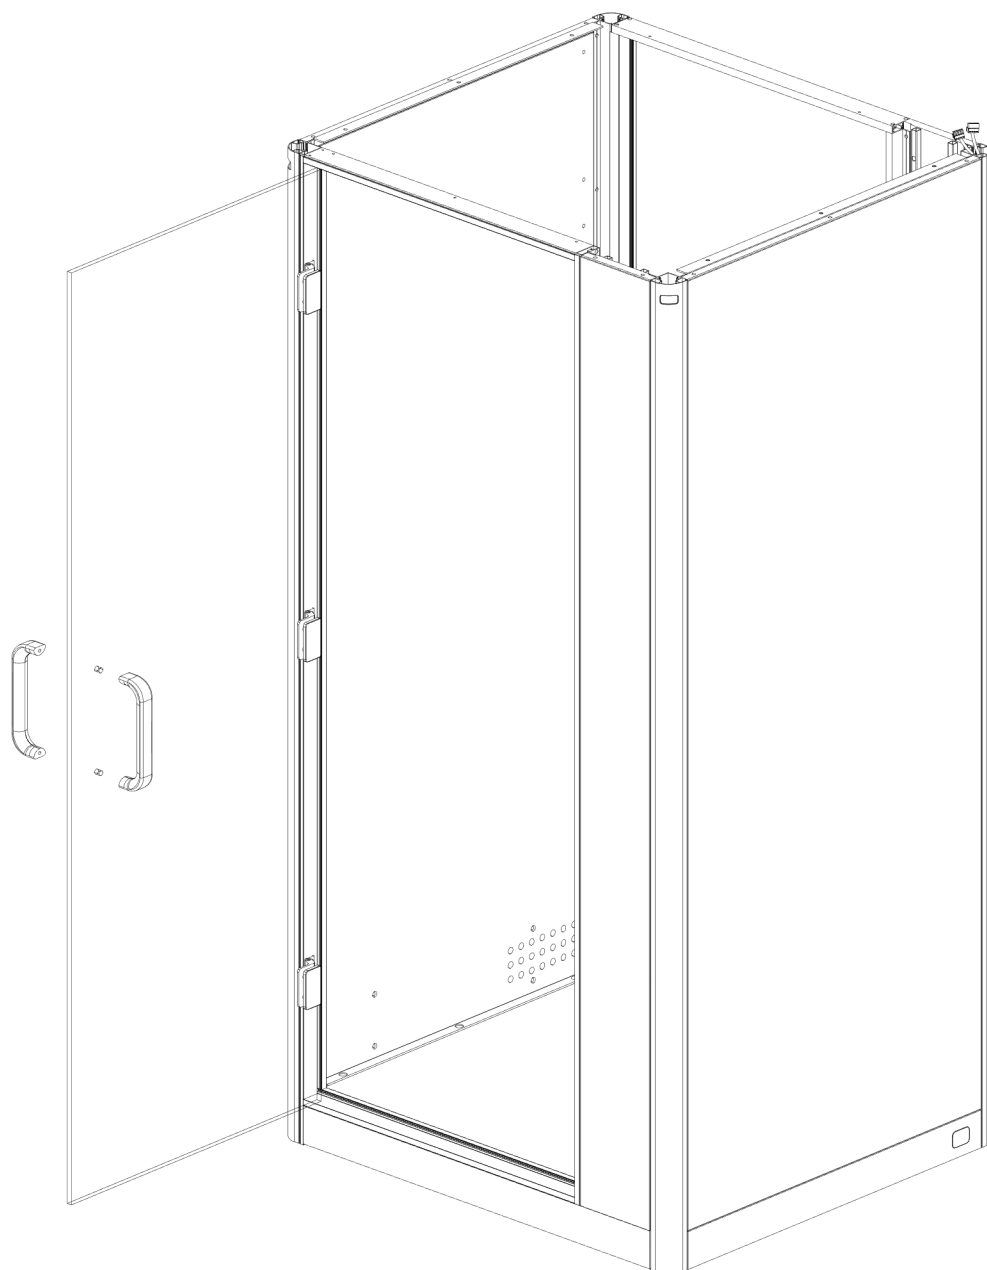

19.




ALLEN KEY
(6 / 2,5 mm)

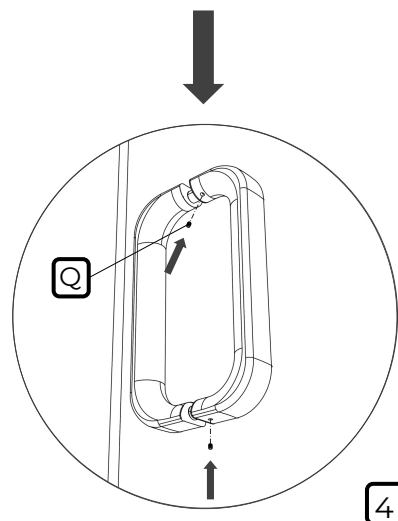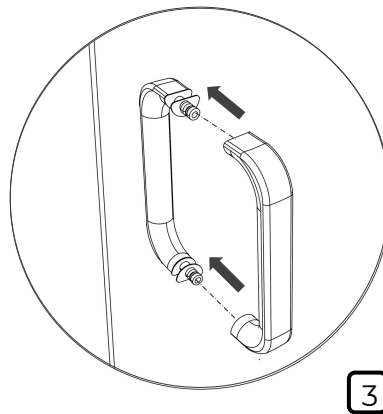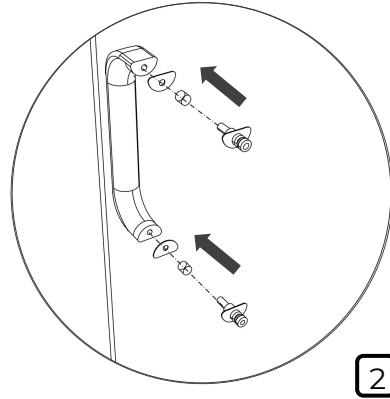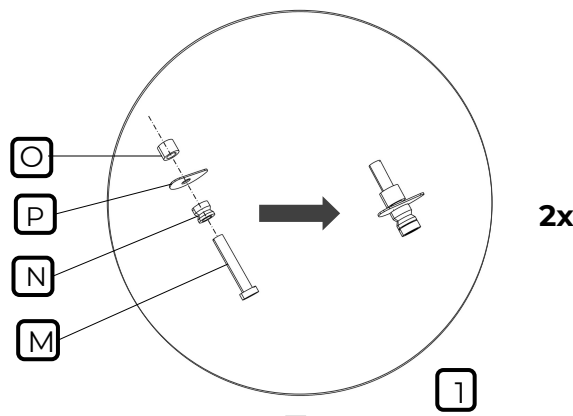



20.

4. SUB_4

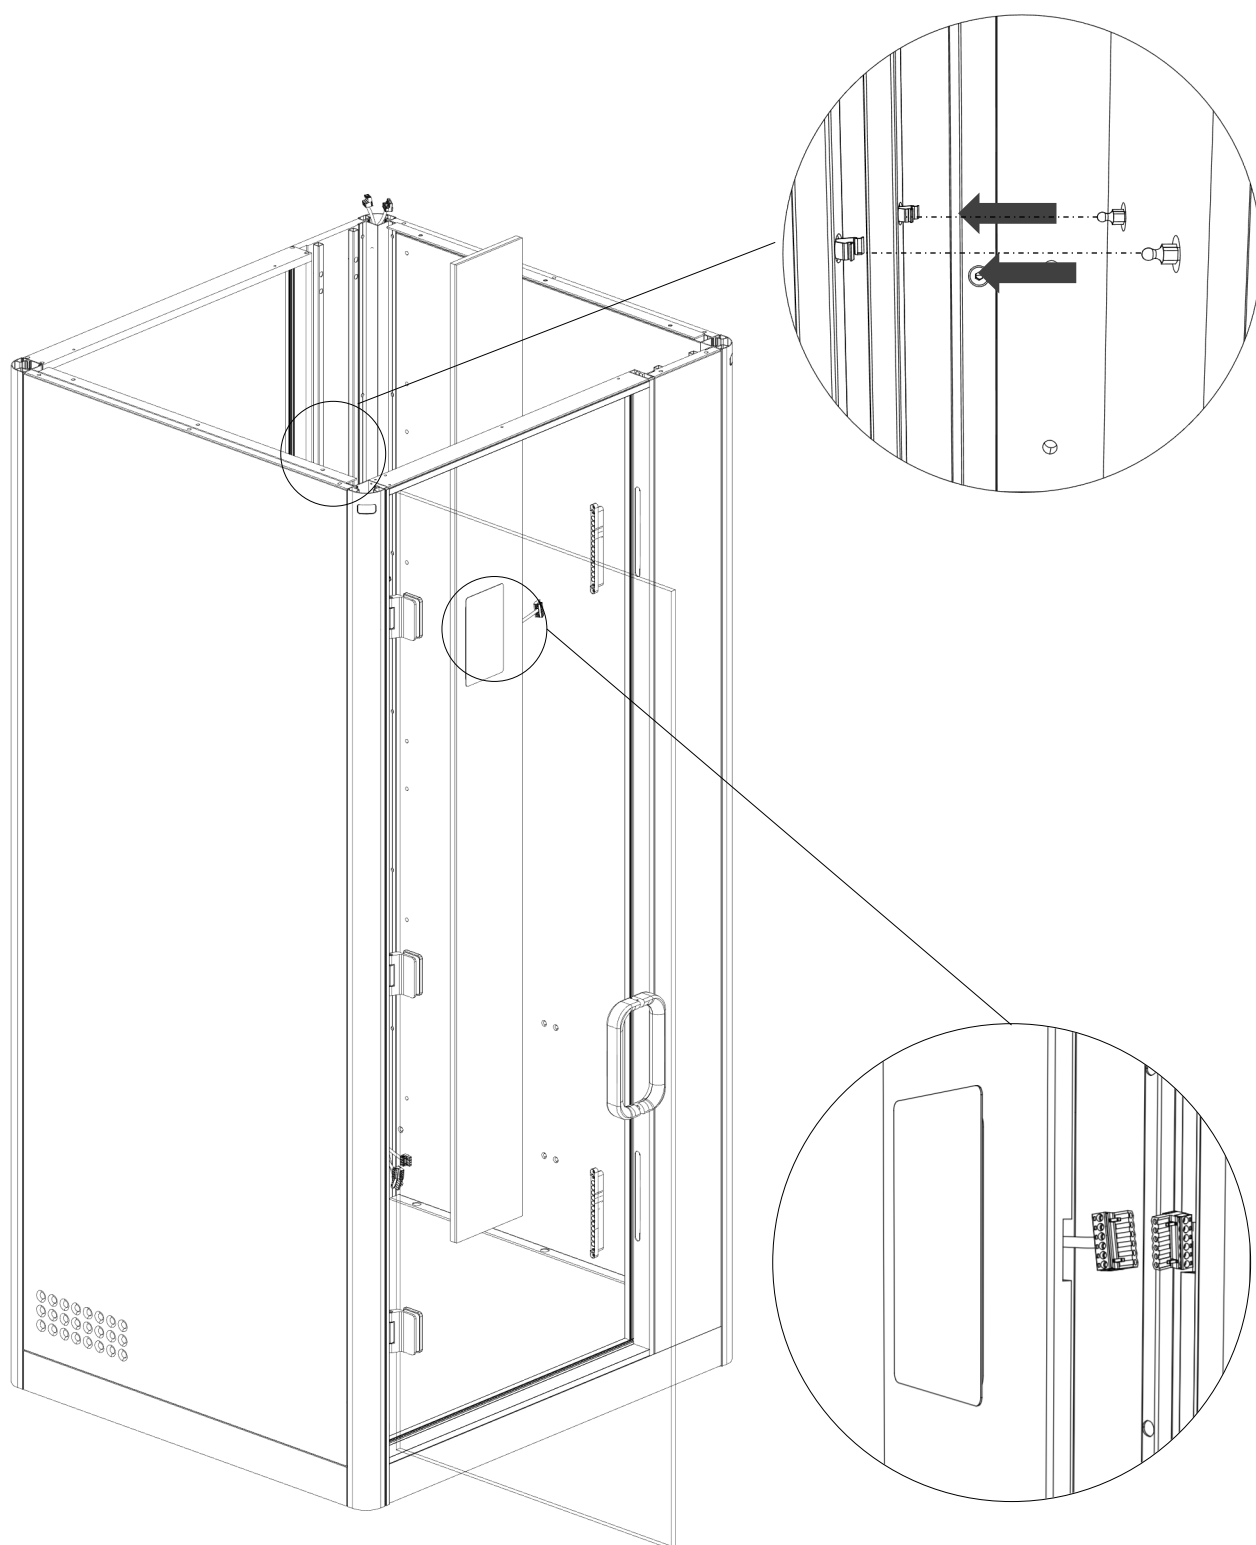

21.5x20 FLAT HEAD
SCREW


4X

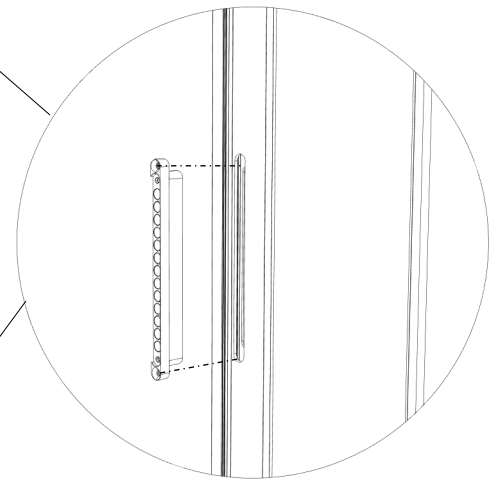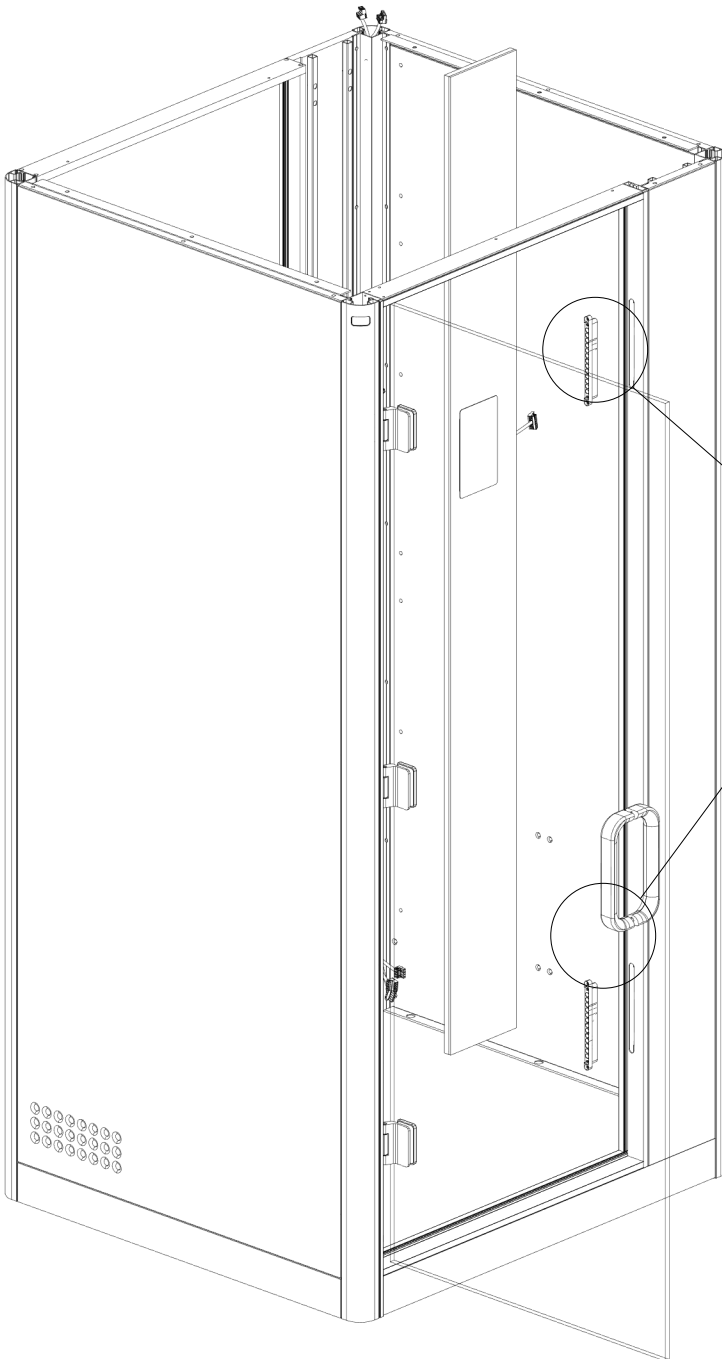POWER
TOOLALLEN
(4 mm)


Screw the door magnet into place.

22.


5. SUB_5

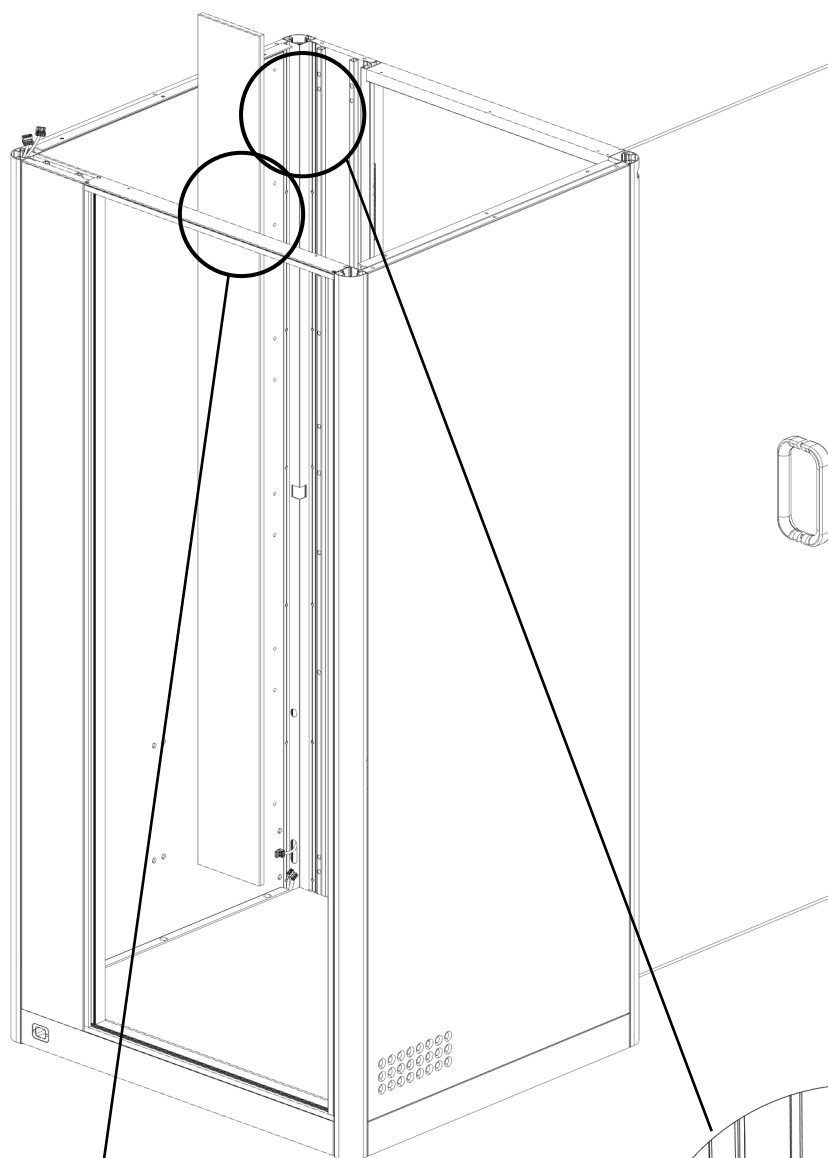

BACK

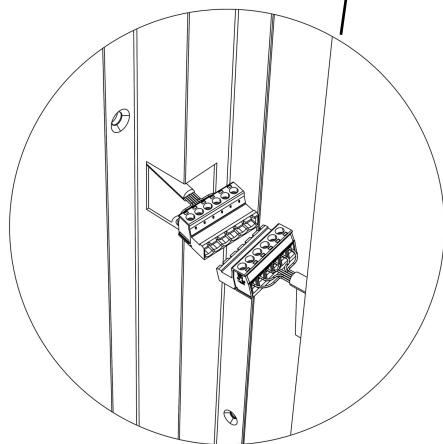


Connect the cable from the profile to the one from the back of the screen.

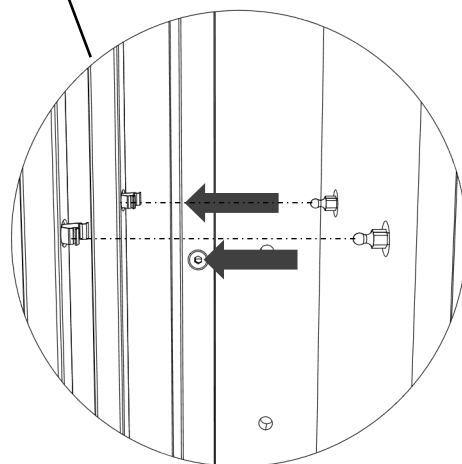


23.

9. SUB_9



PIECE OF FOAM

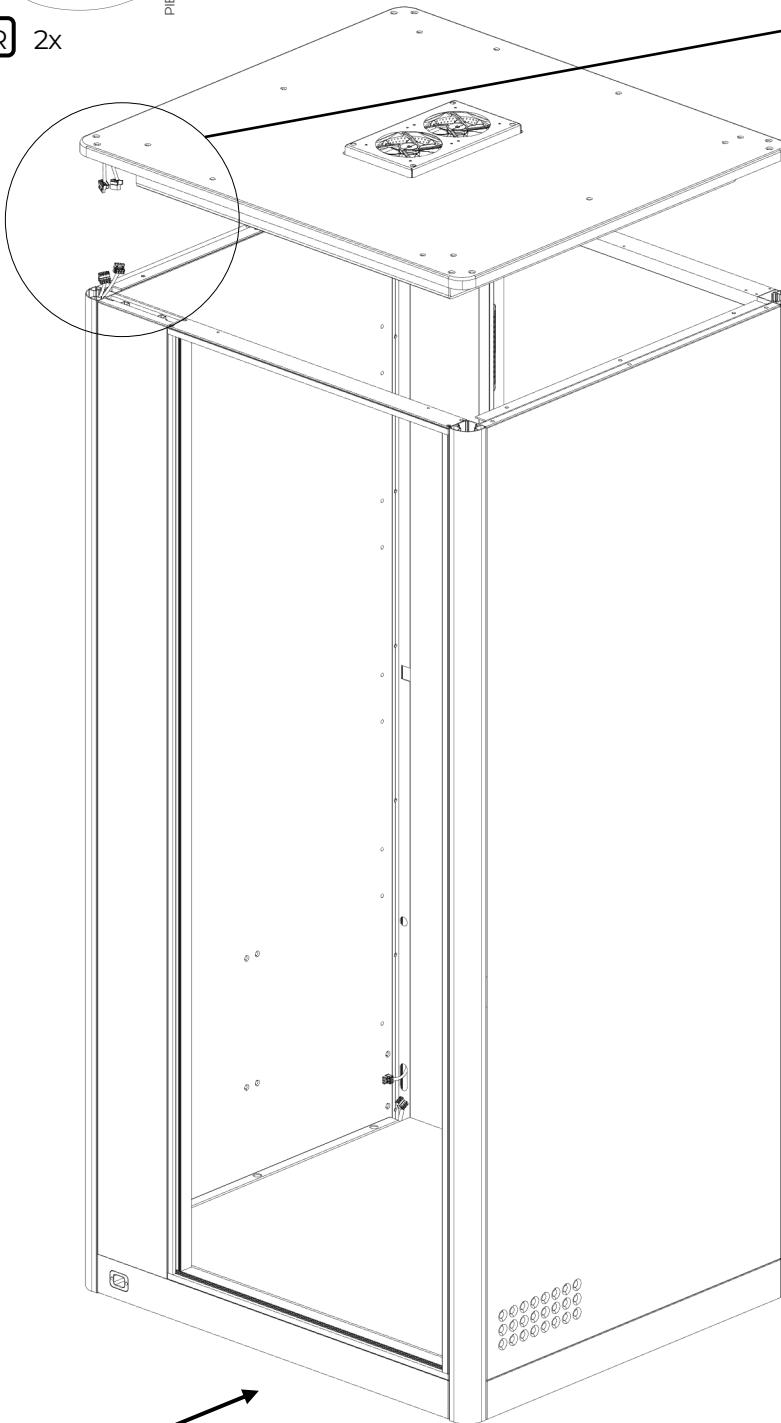
R 2x

BACK

After connecting the cables, ensure that the cables are safely placed inside the profile to avoid damaging them.

24.


9.SUB_9

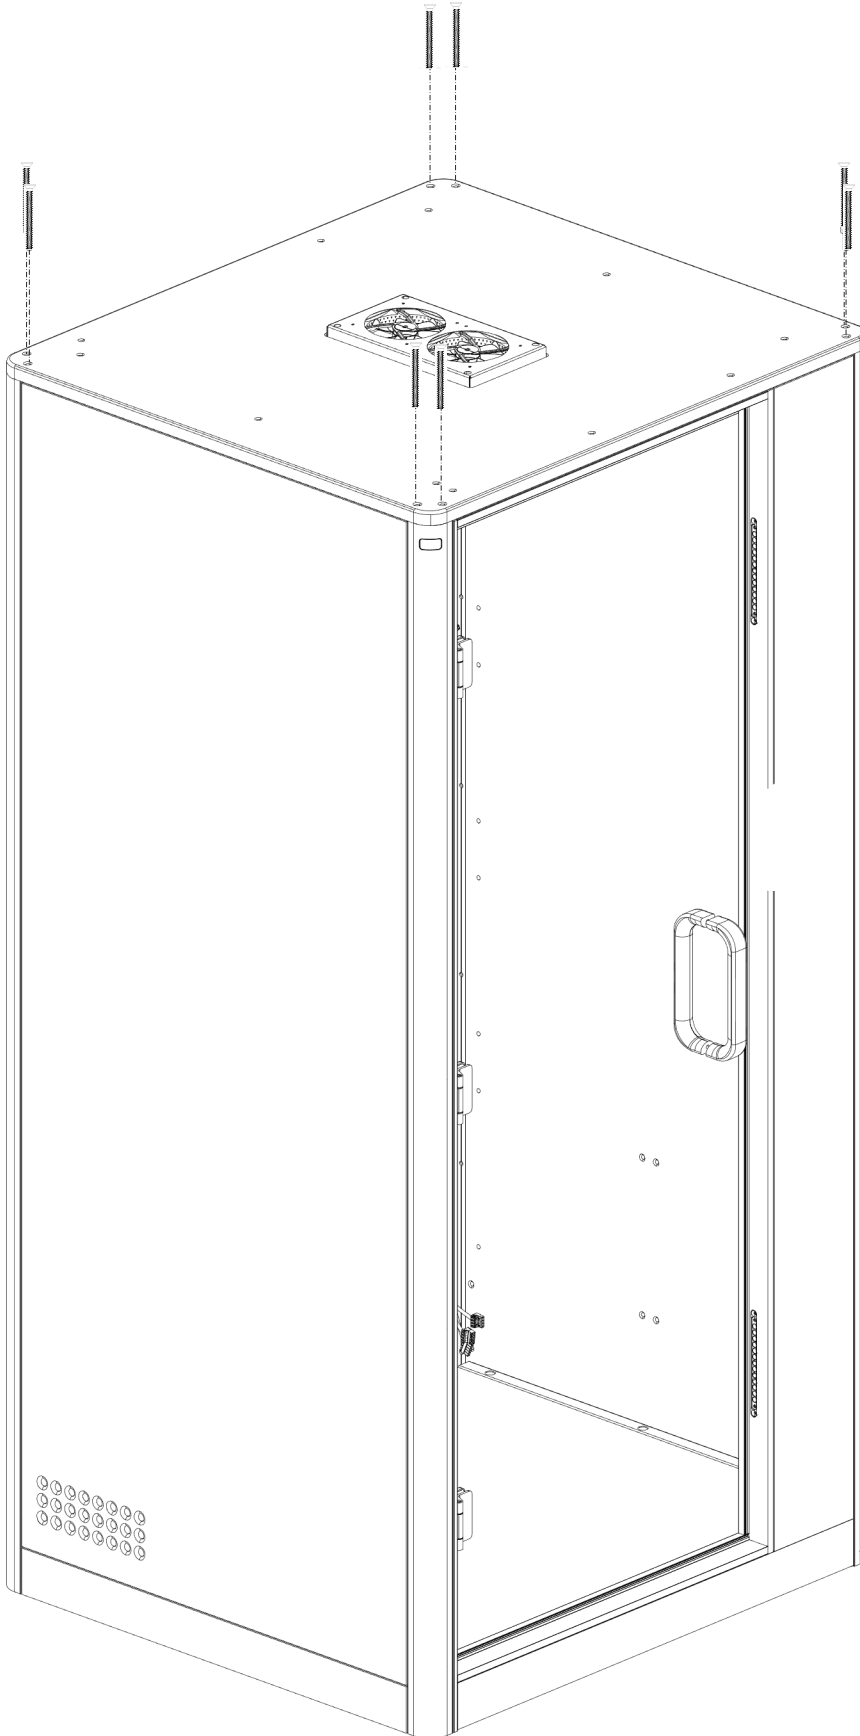

25.


 6X12 FLAT HEAD
 SCREW
 3x

B




POWER
TOOL

+



ALLEN
(5 mm)

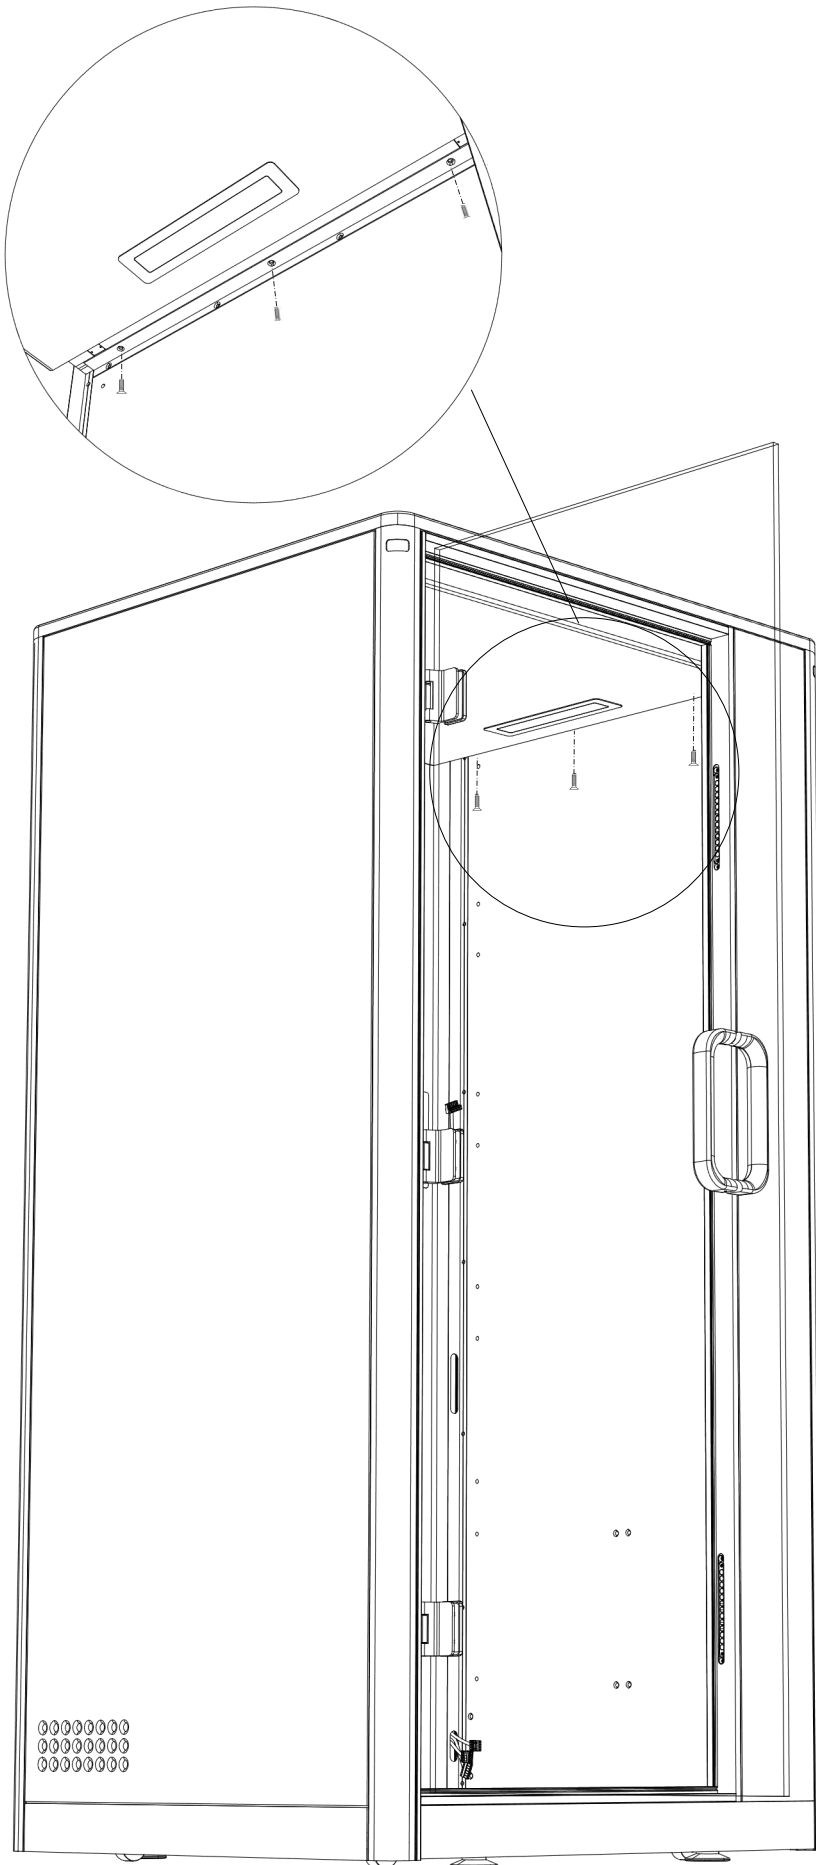

26.





3x


B

POWER
TOOL

+

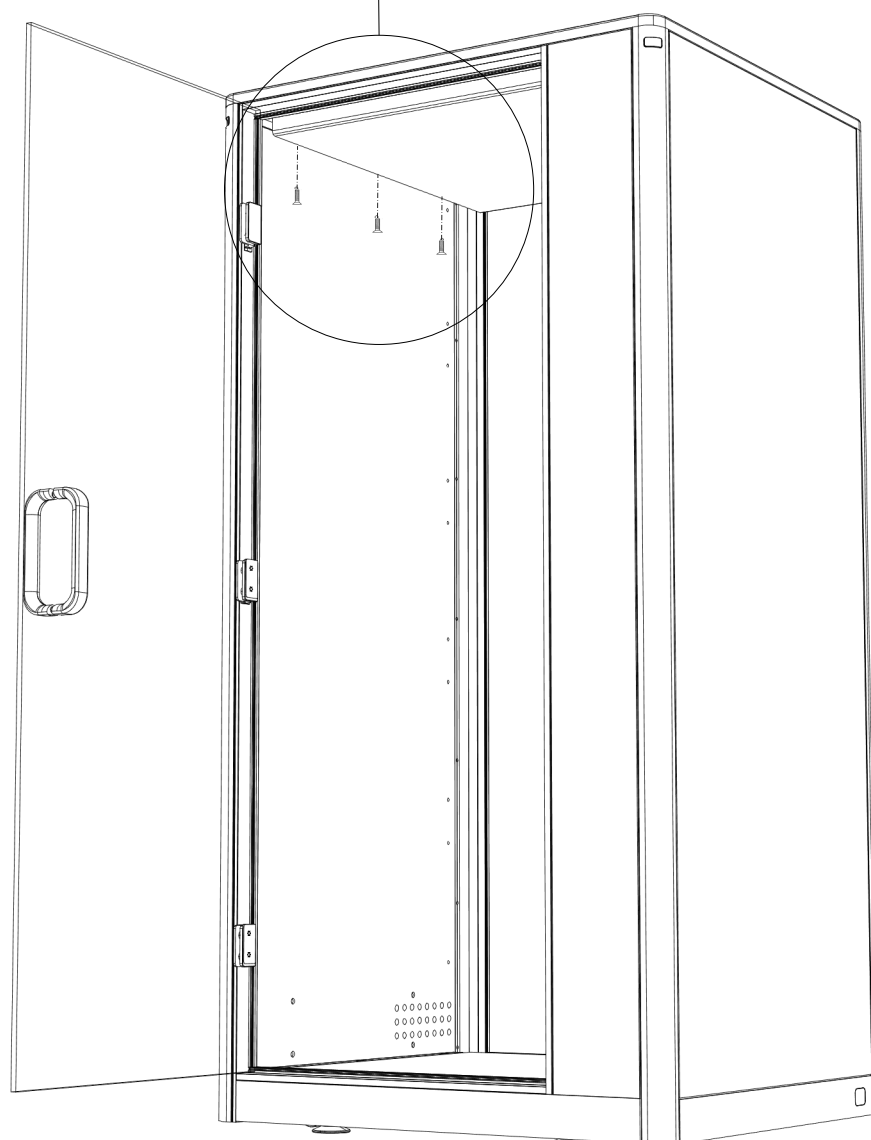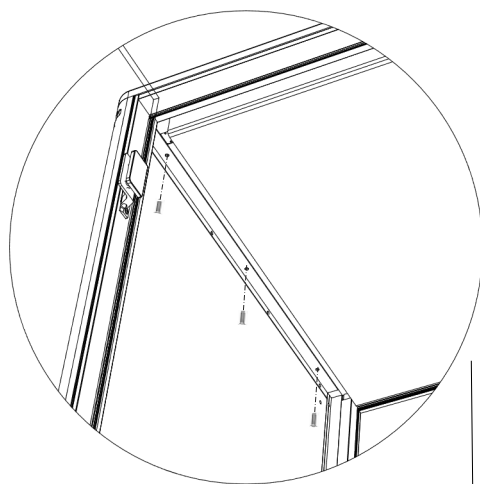
ALLEN
(5 mm)

27.



6x35 COUNTERSUNK
BOLD HEAD SCREW


5x




POWER
TOOL




ALLEN
(4 mm)

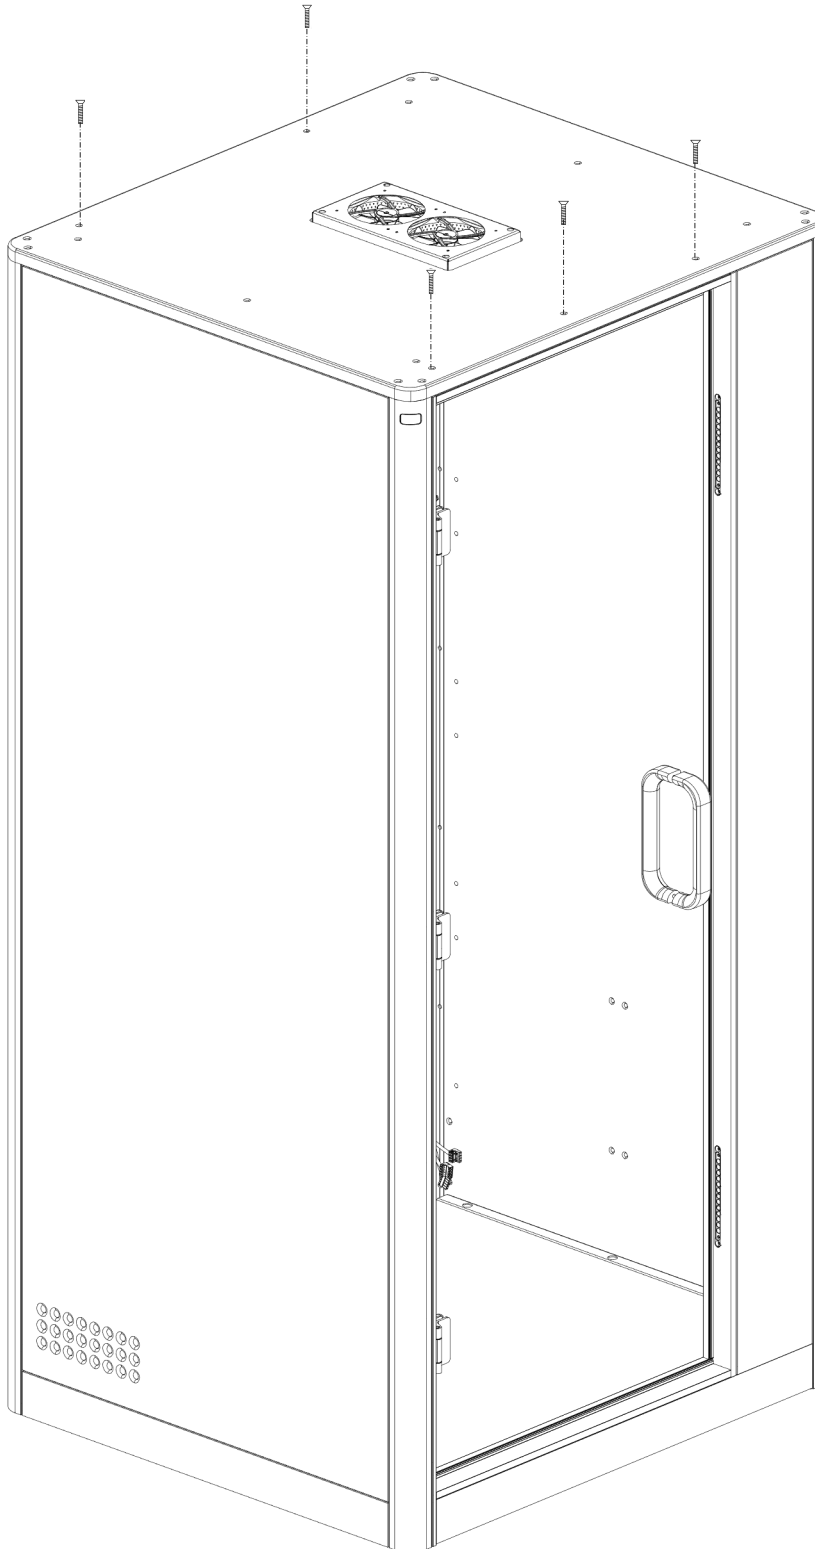


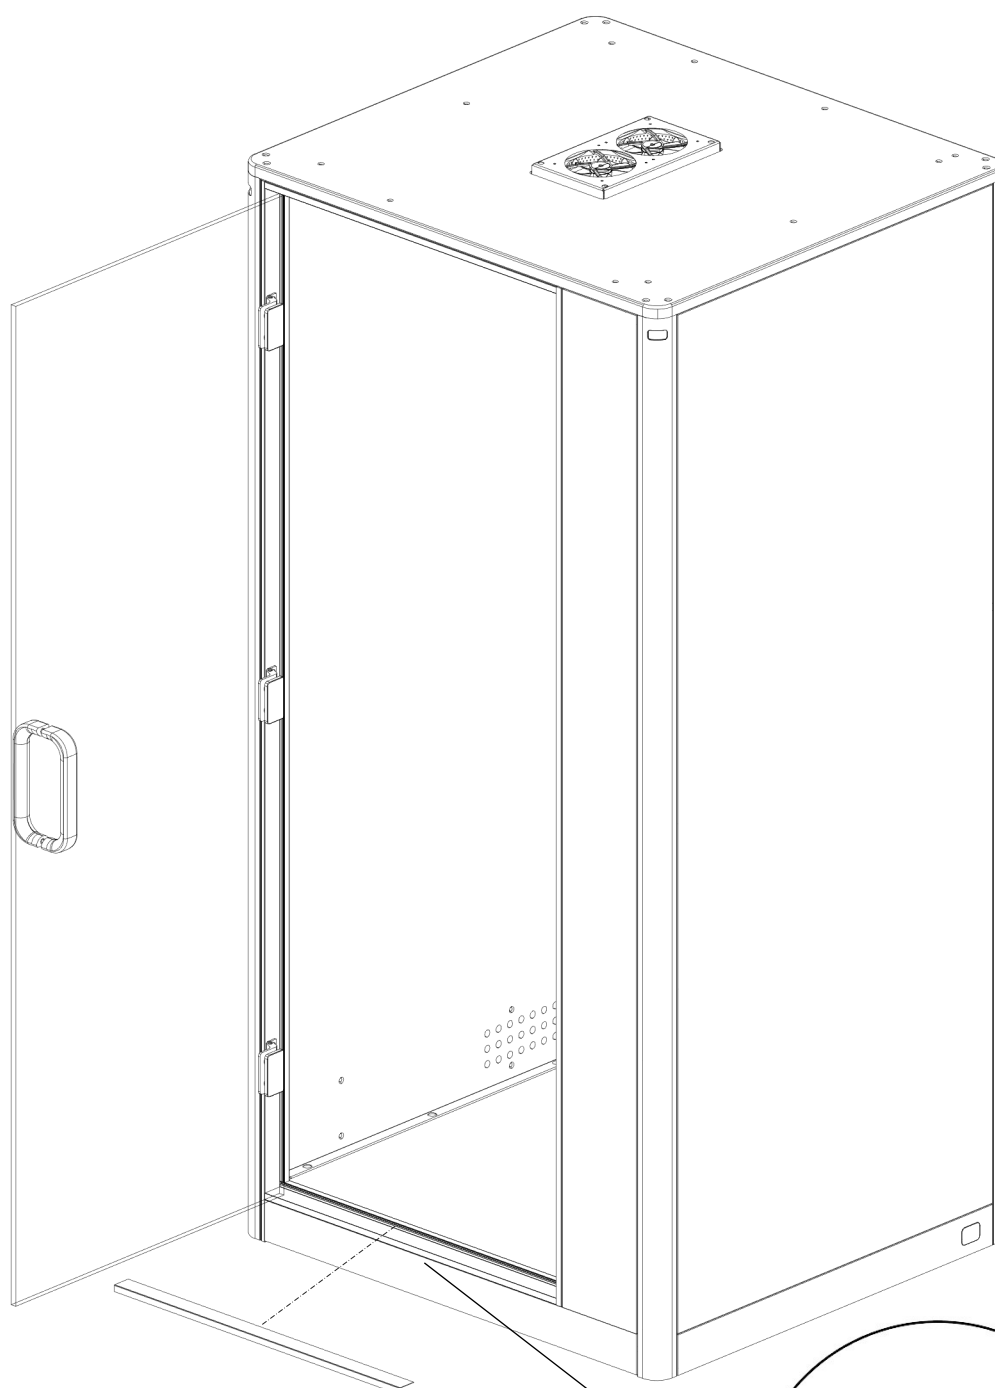
28.

Remove the tapes from the bottom of the nameplate and place it on the door profile with the tapes facing downwards.

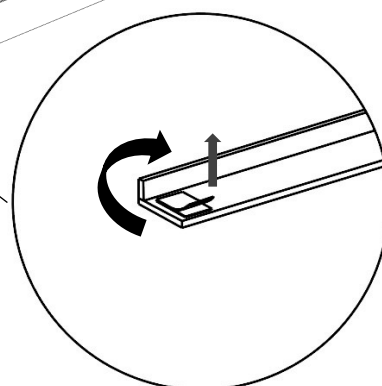


29.

8x

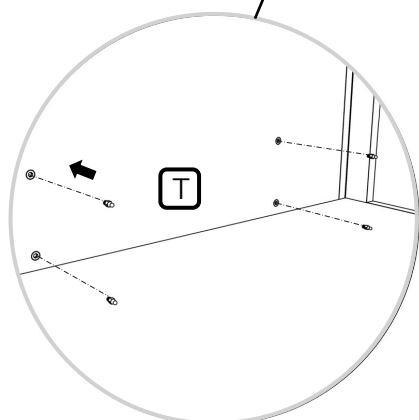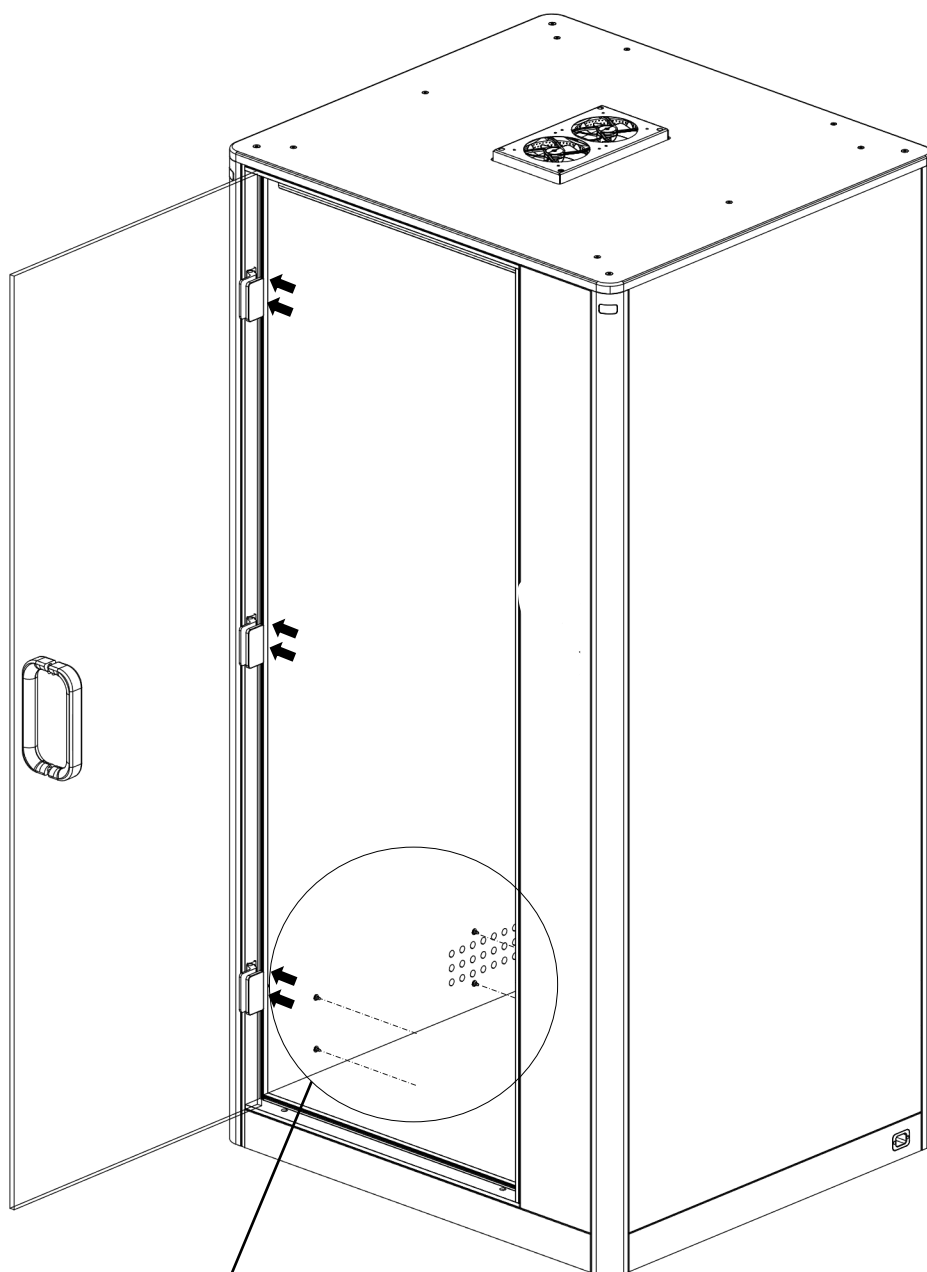

Do this for both sides.

30.

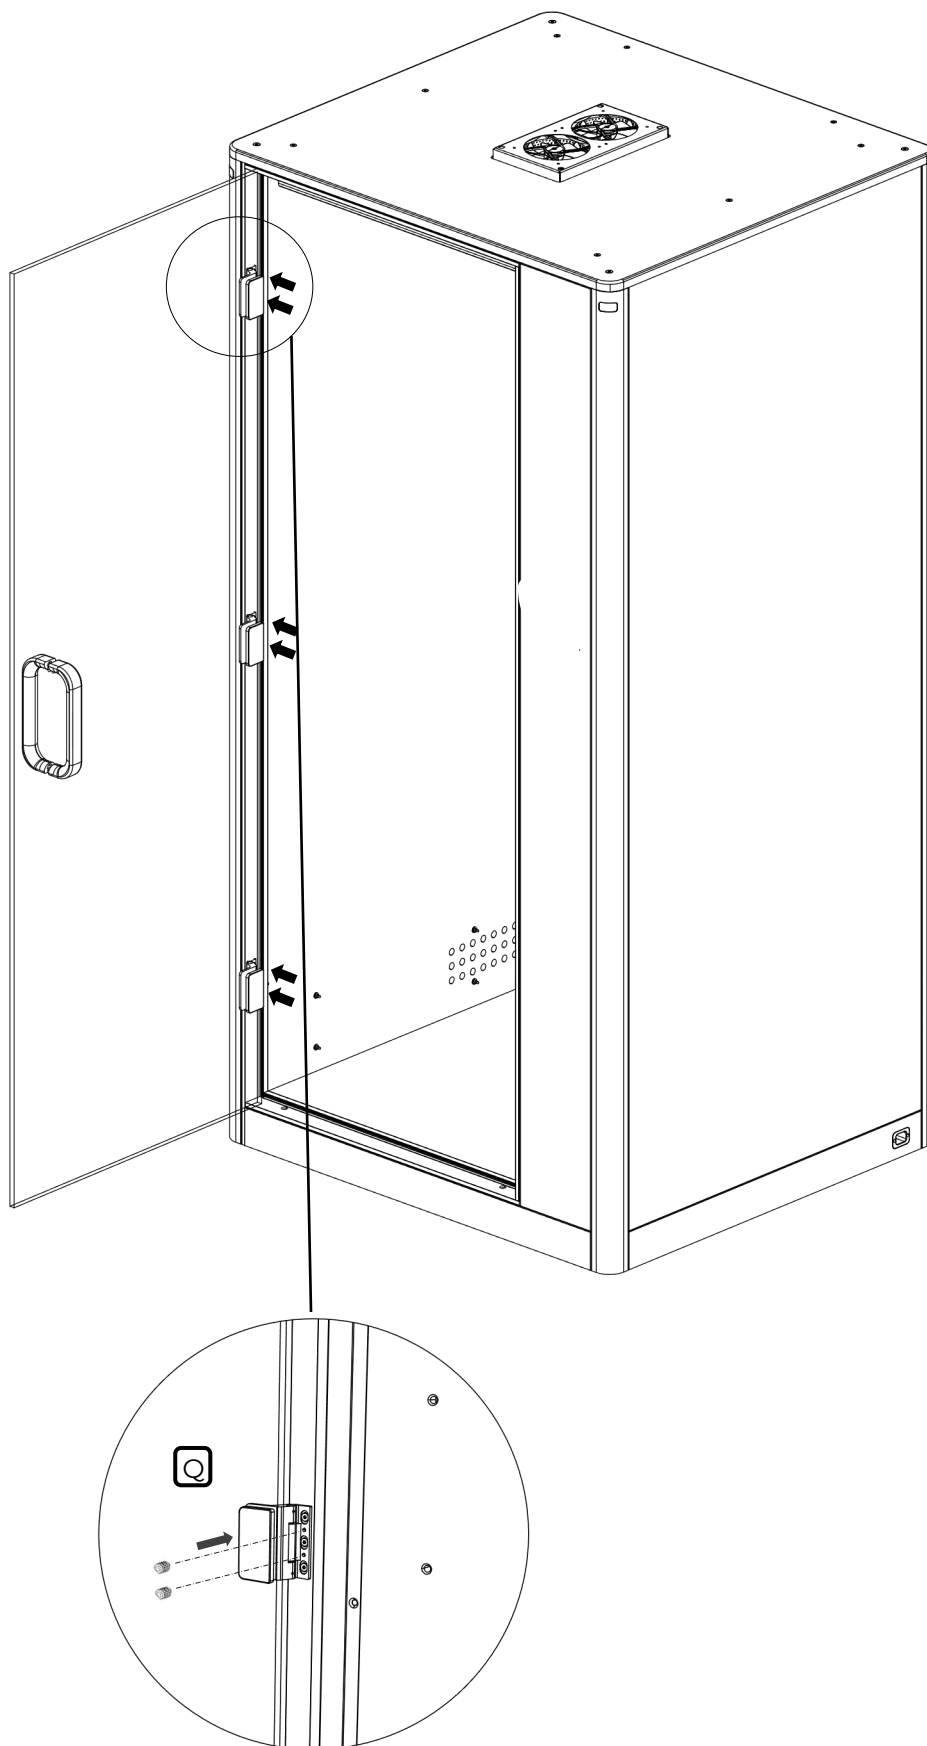


31.

10.SUB_10



4x

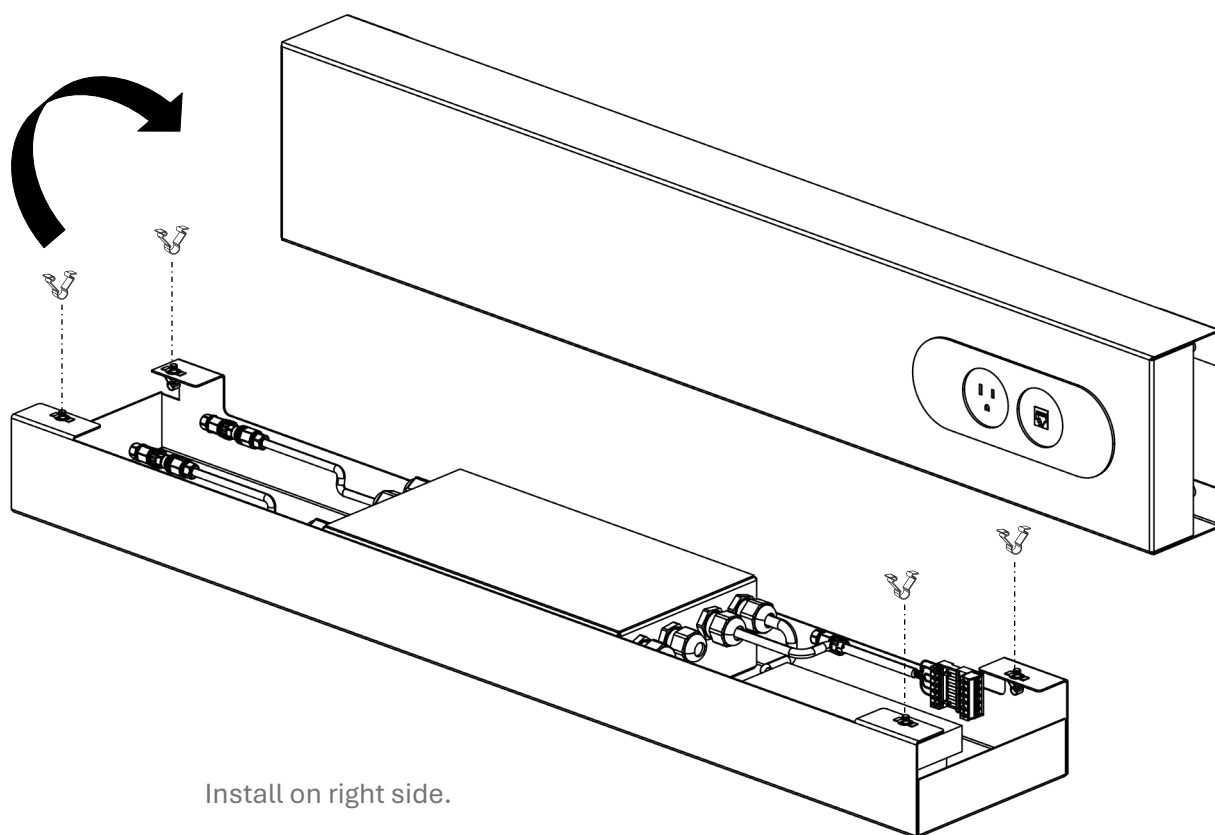


Install on right side.

32.

11. SUB_11



4x

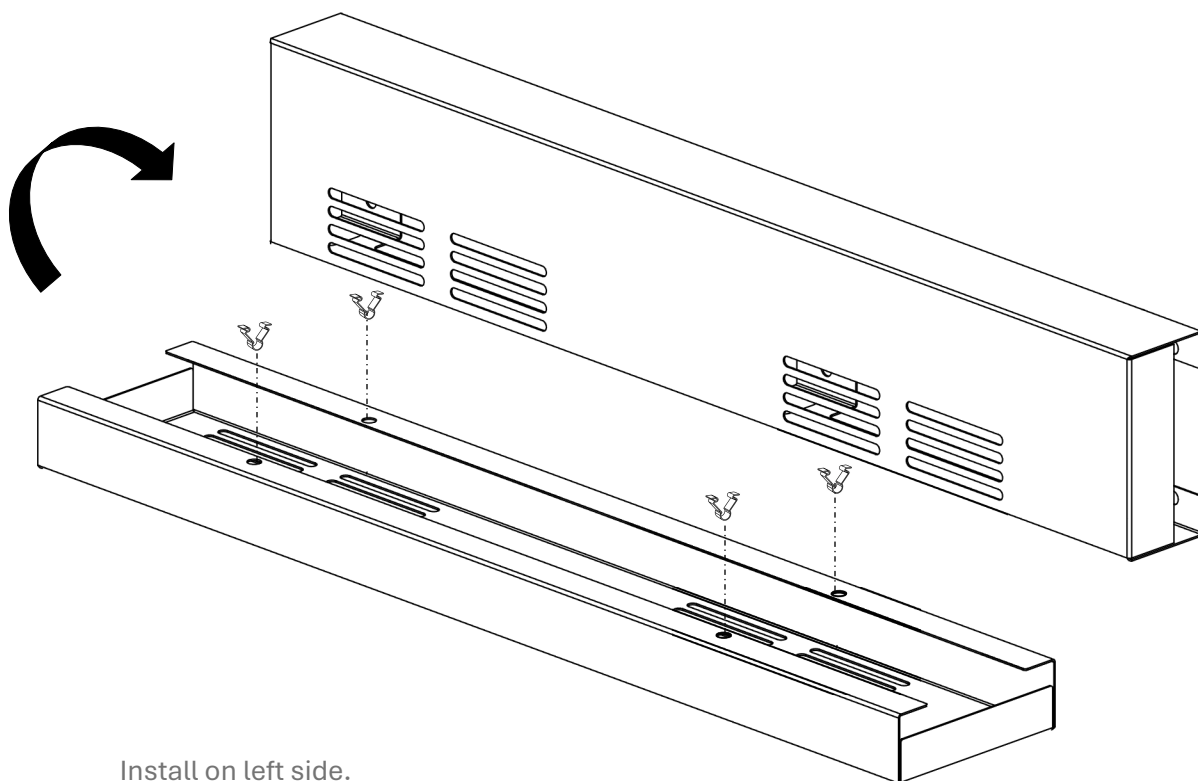


Install on left side.


33.

10. SUB_10

11. SUB_11

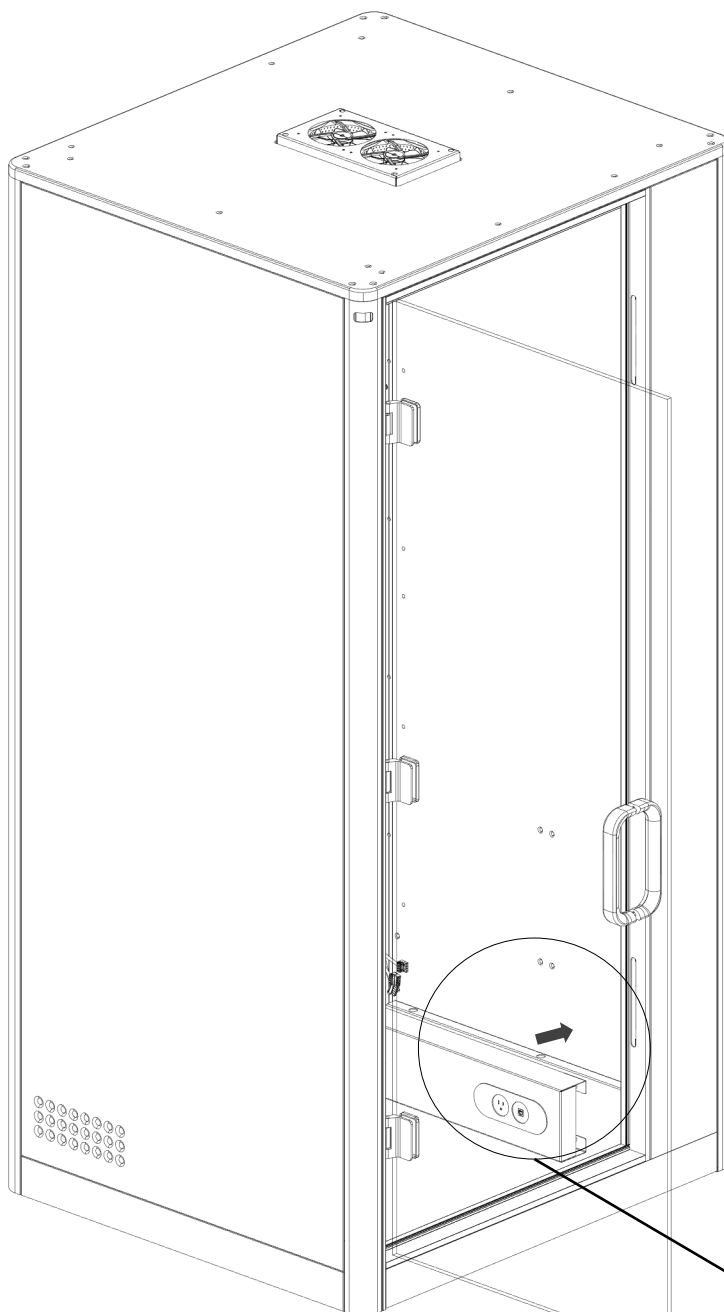


WARNING Wire cables with the same labels to one another.

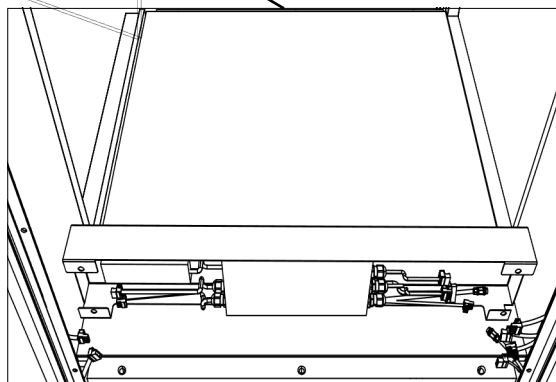



34.

12. SUB_12

13. SUB_13

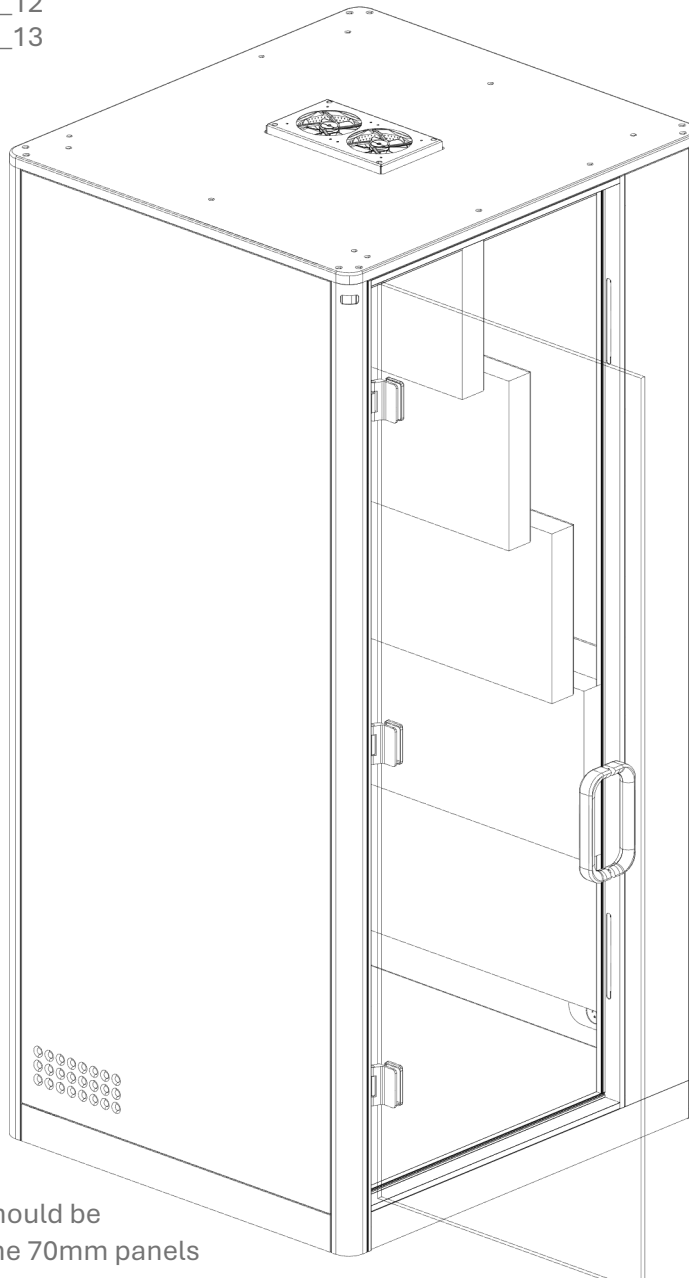**! ATTENTION :**


The 50mm thick panels should be installed on the left and the 70mm panels on the right.

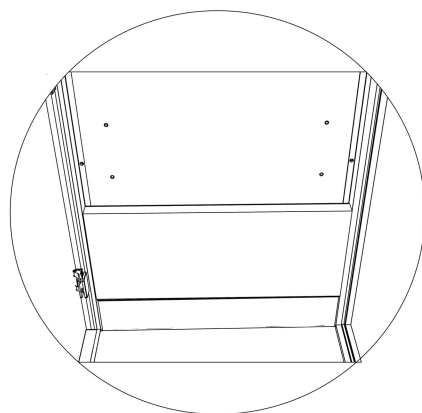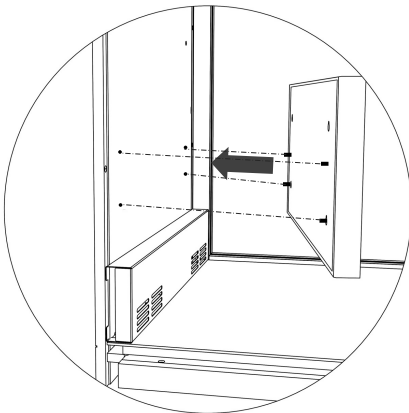


Install the panels with the pins on both sides.

10.0 – In Case you Need to Change Calma's Location


1.

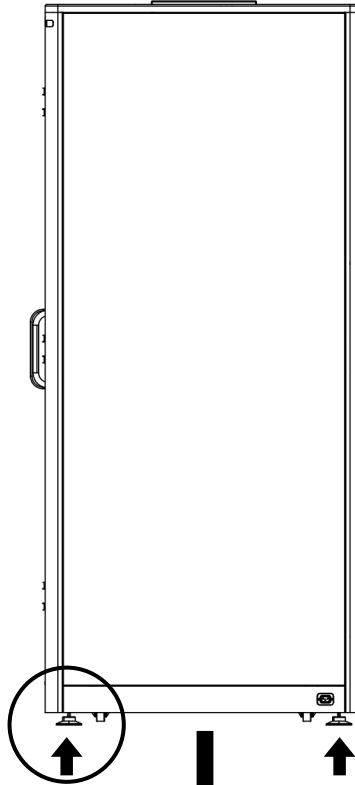

2.

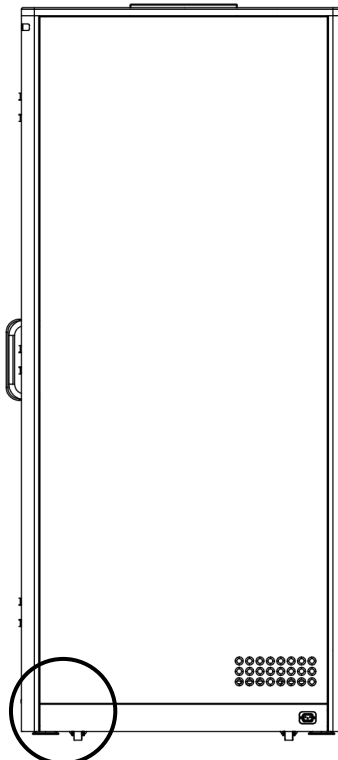



3.

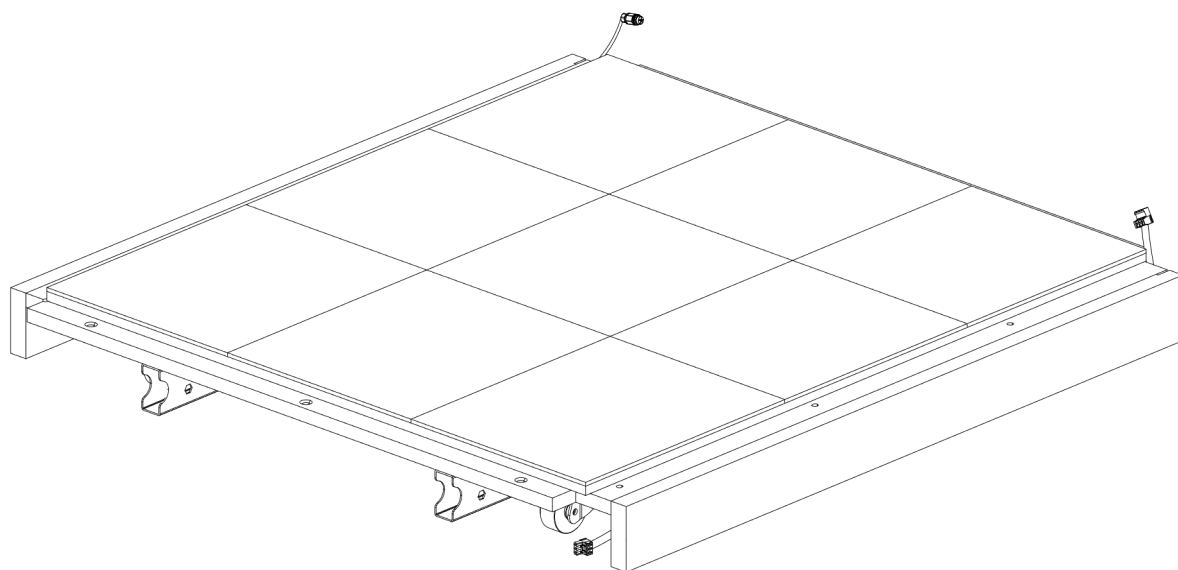

4.




ALLEN KEY
(5 mm)

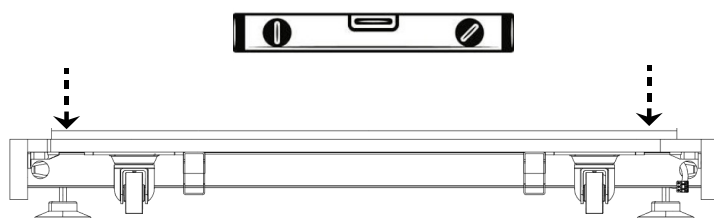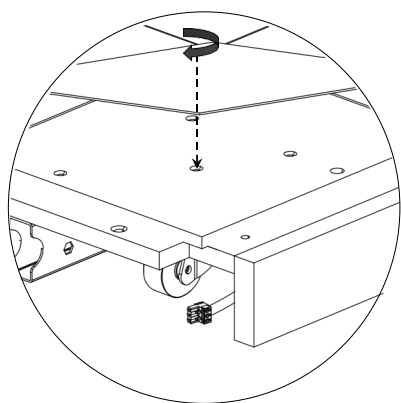


* Use a leveling tool to ensure the floor is perfectly horizontal to the ground.


11.0 – In Case you Need to Adjust the Hinges

1.

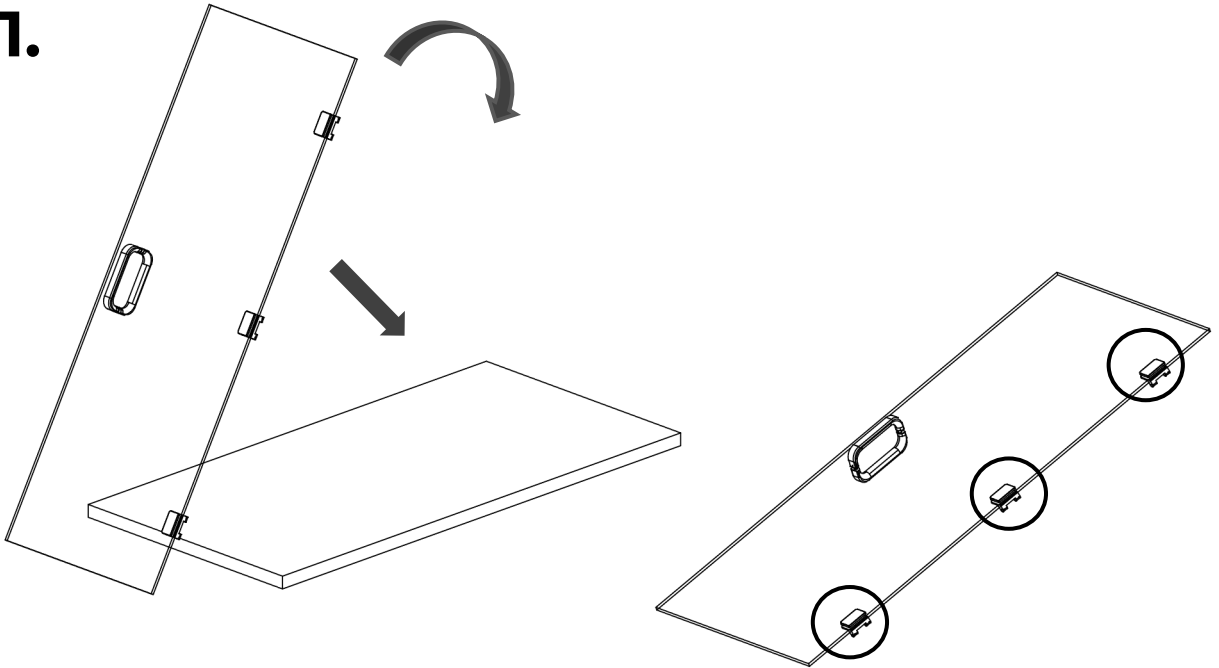




2.


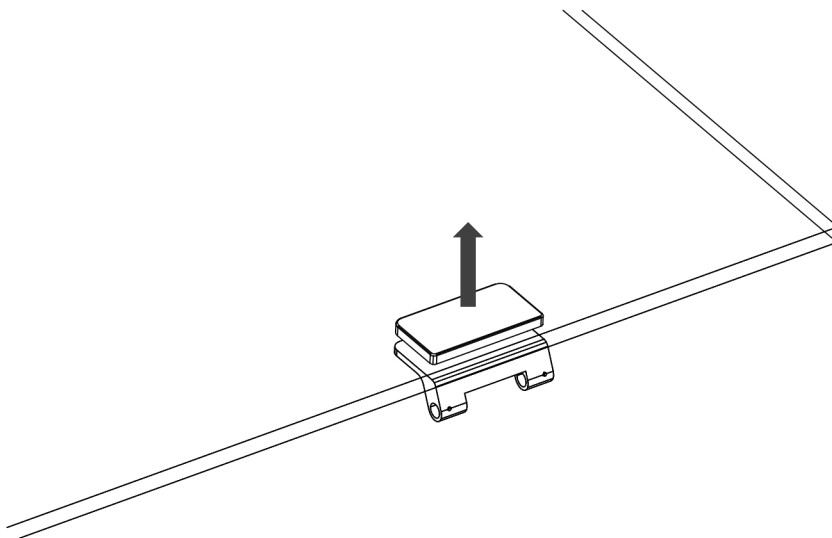


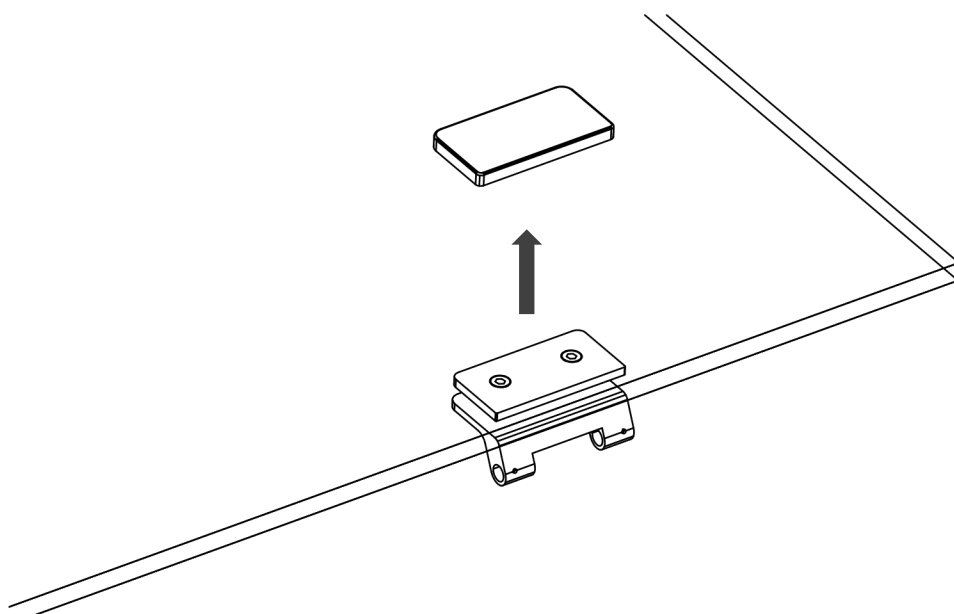3.**4.**


ALLEN KEY
(4 mm)

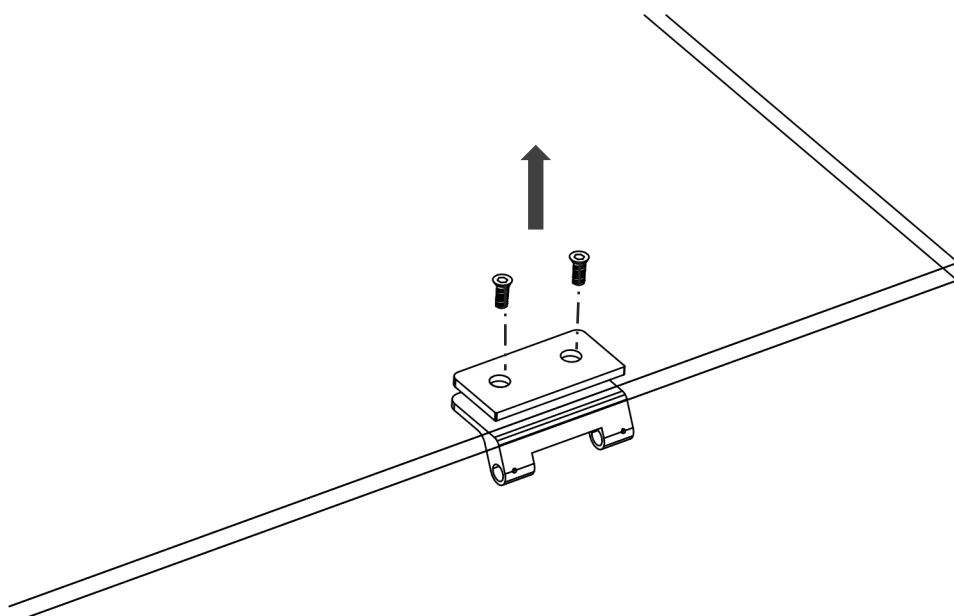


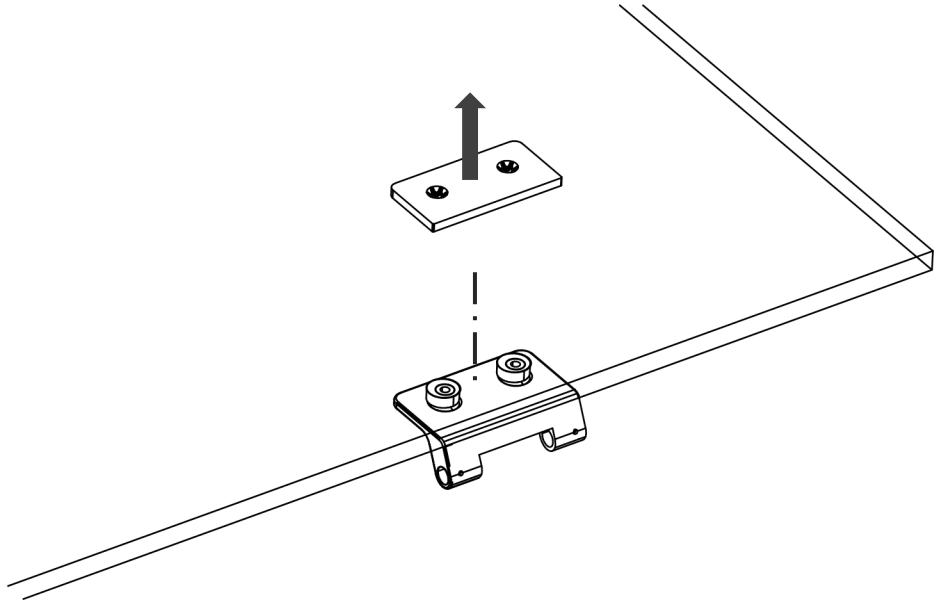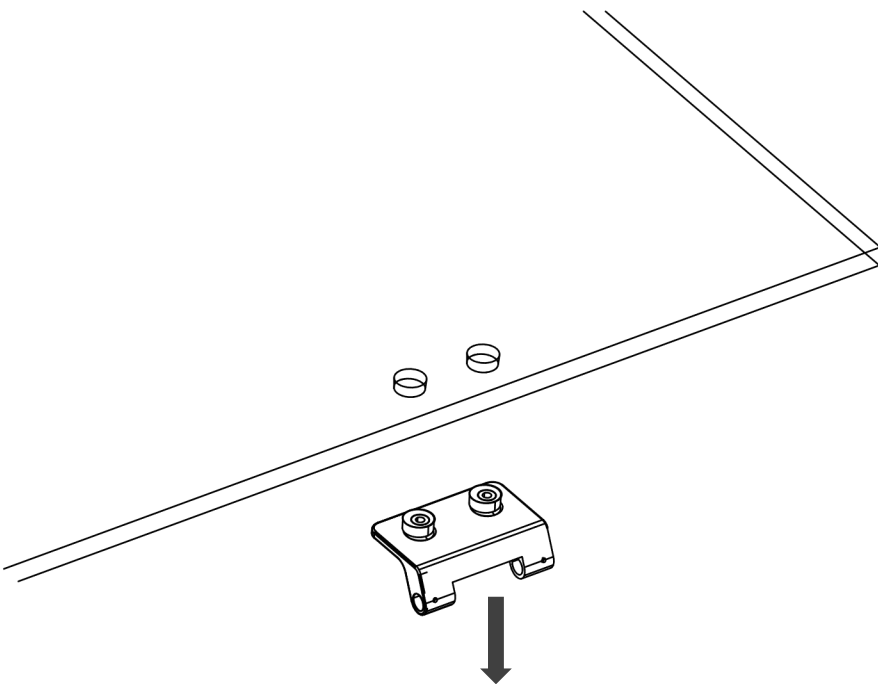5.**6.**

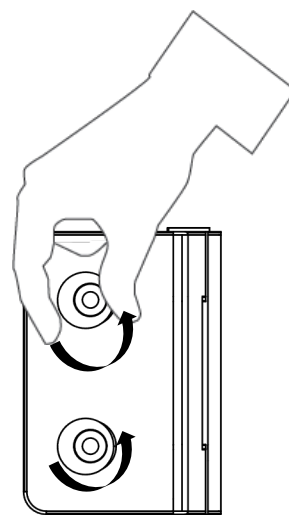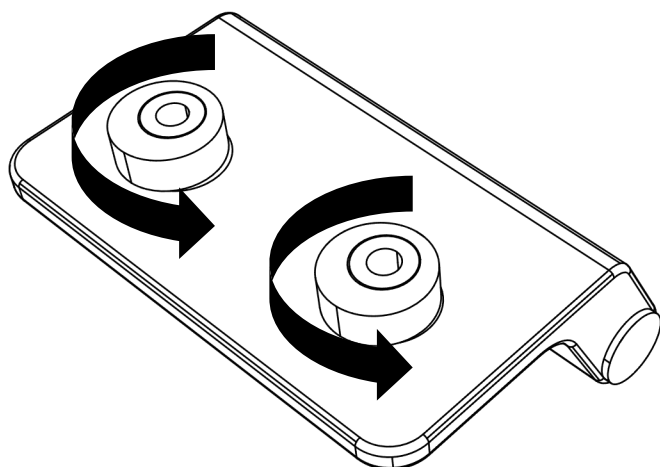
7.


To adjust the hinges; rotate the thick parts and make sure the final position is the same as the image below. Do this for all hinges on the door.

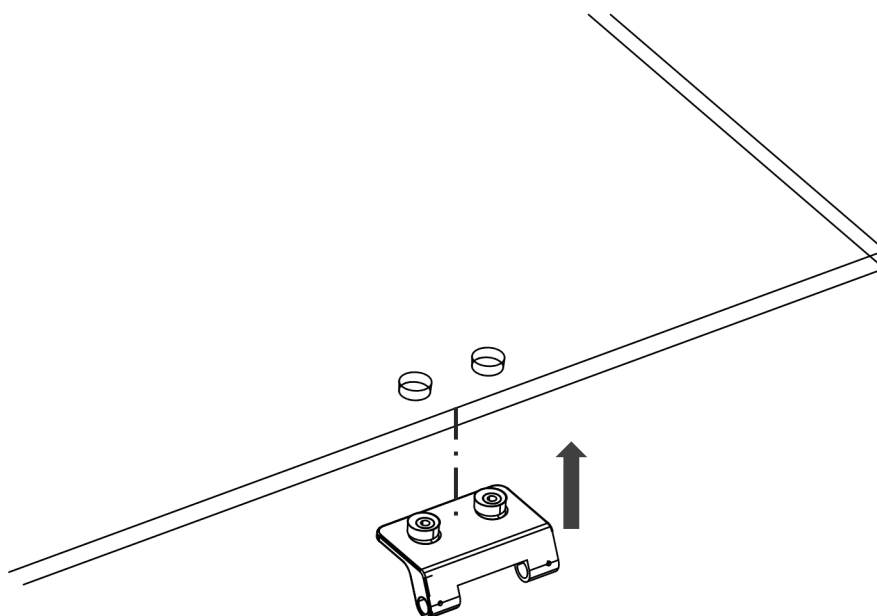8.

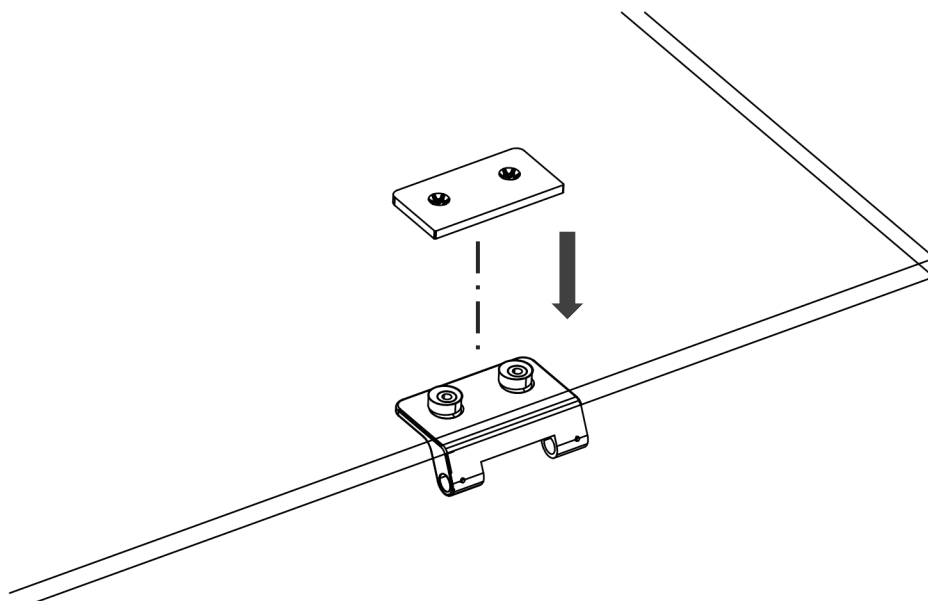
9.**10.**

ALLEN KEY
(4 mm)

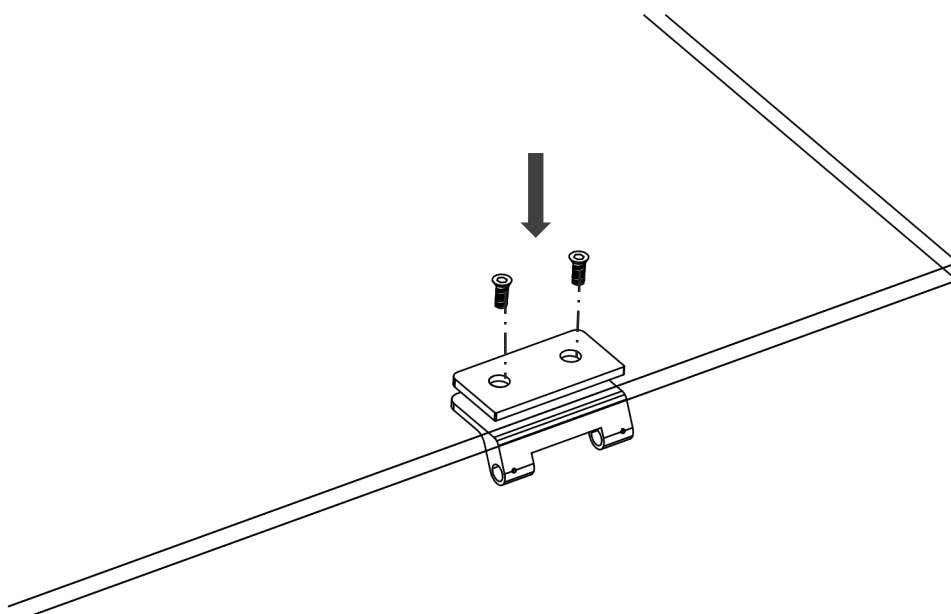

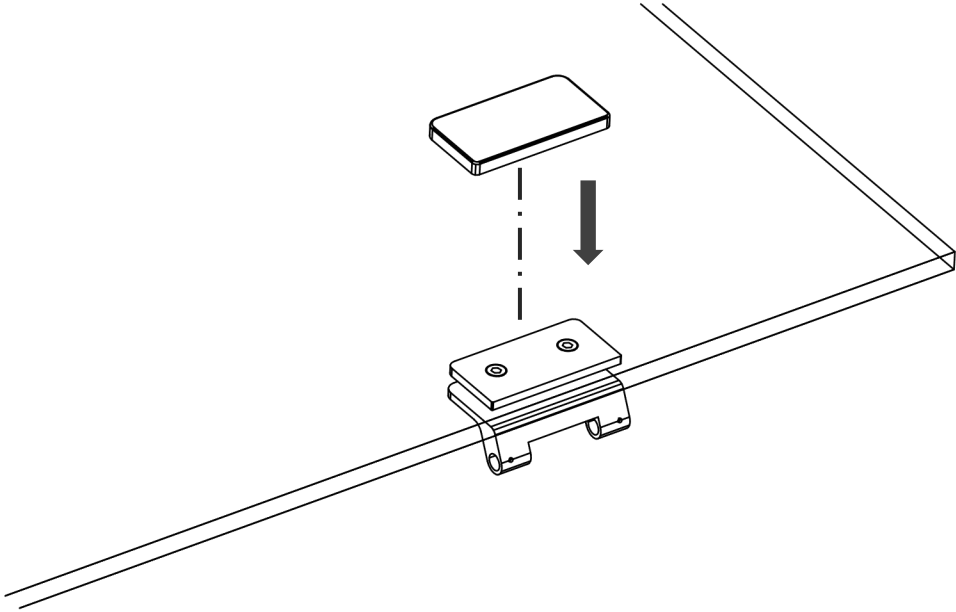
11.**12.**

ALLEN KEY
(1 mm)

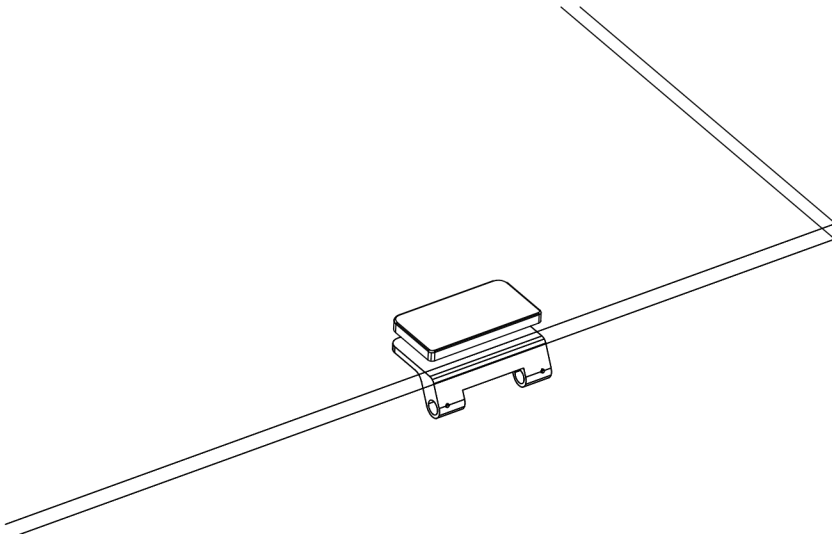

12.0 – Installing the Fixed Table



- 1.** 14. SUB_14
15. SUB_15

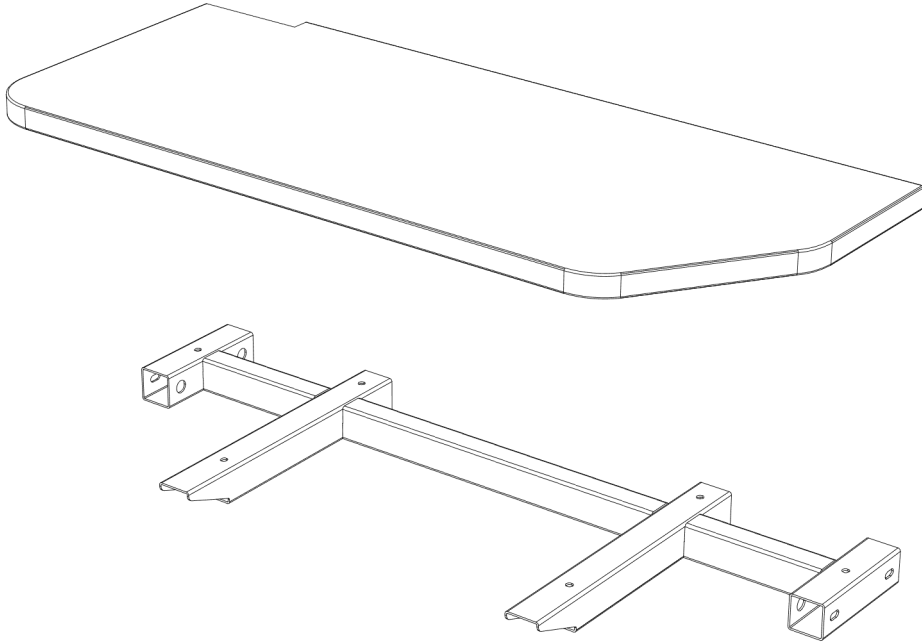






2.

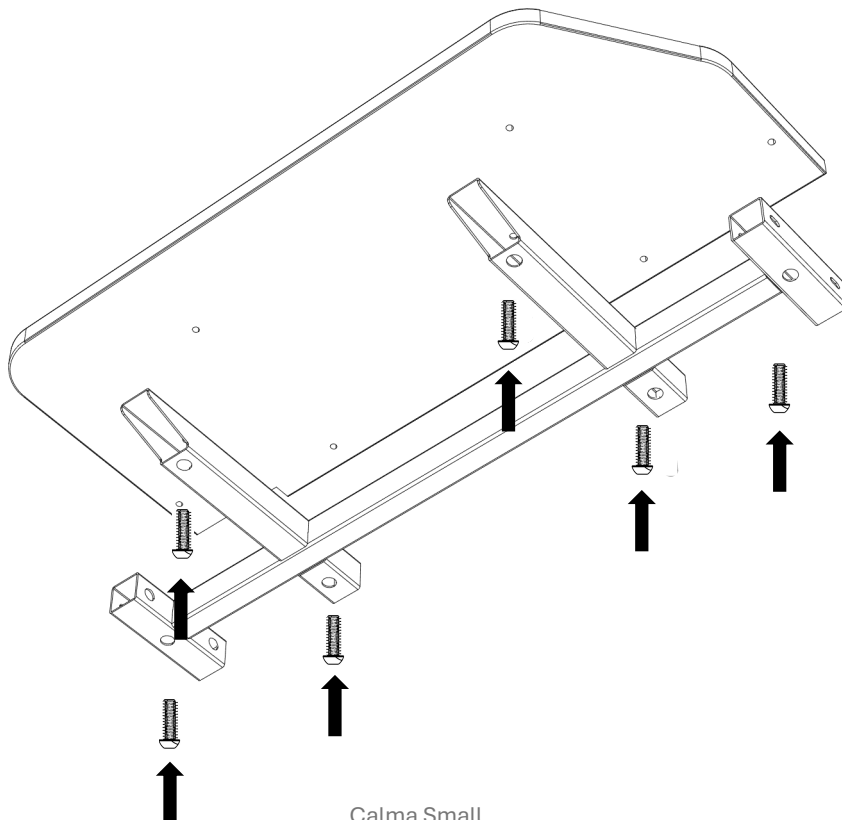



6x

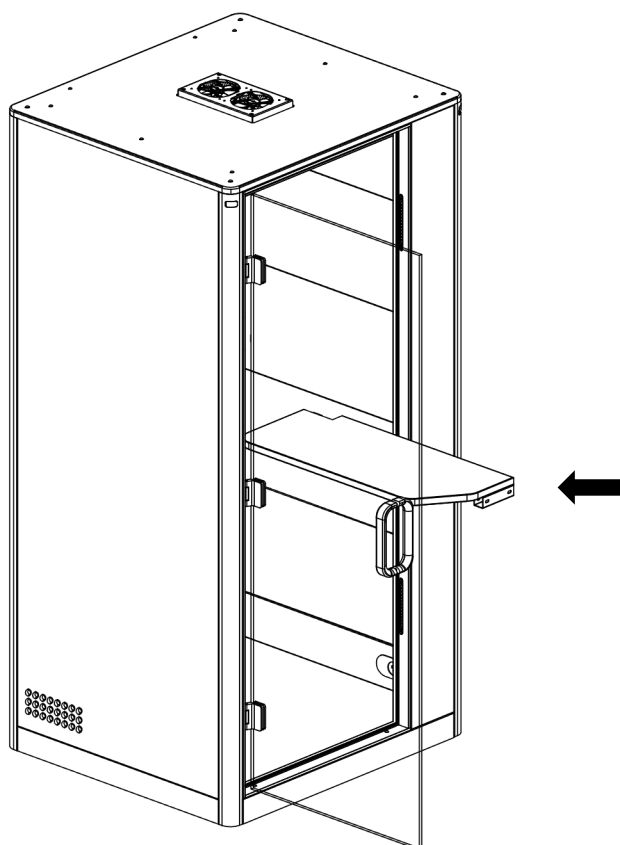

3.**4.**

- 
6x12 HEX SOCKET
BUTTON HEAD BOLT
- 4X
- 
S
- 
POWER
TOOL
- 
ALLEN
(4 mm)

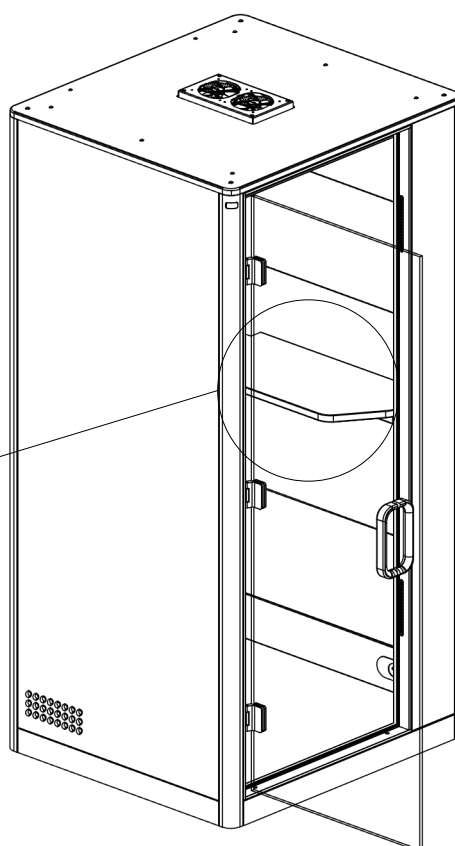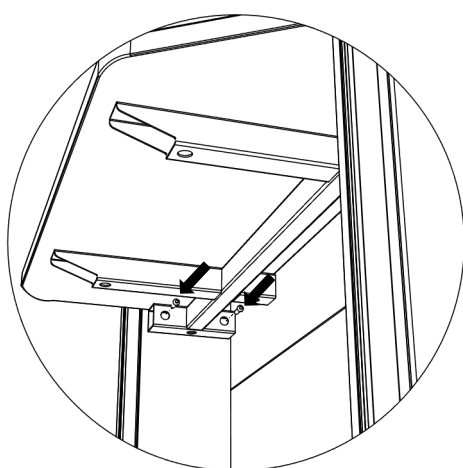

Calma

SMALL by nurus

Installation Manual
Made in Türkiye