

# Calma Specbook



**nurus**

Adaptable Sizes  
Unlimited Flexibility

# Seven Solutions

Internationally Recognized  
Certifications

15+

Acoustic Attenuation Rate  
\*according to ISO 23351-1

Class - A

Warranty

5 Years

Air Circulation within Pod  
\*Calma For U

106 times / hour

Happy Clients

> 4.000





Calma

# Product Family



**Calma Small**  
39.4x43.3x88.1 in / 100x110x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing




Excellent Voice  
Clarity



Adjustable  
Features



 **Calma For U**  
39.4x55.1x88.1 in / 100x140x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Excellent Voice  
Clarity



Broadcast  
Quality Lighting



**Calma Medium**  
39.4x86.6x88.1 in / 100x220x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Excellent Voice  
Clarity



Widest Central  
Wall in Its Class



**Calma Large**  
56.6x86.6x88.1 in / 144x220x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Superb Airflow



Maximum  
Comfort in 3 sqm



**Calma XLarge**  
74x86.6x88.1 in / 188x220x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Even Lighting  
Distribution



Easy Installation



**Calma XXL**  
108.6x86.6x88.1 in / 276x220x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Superb Airflow



Even Lighting  
Distribution



**Calma For All**  
74x86.6x88.1 in / 188x220x224 cm



VOC Free for  
Better Air Quality



Class A Certified  
Soundproofing



Superb Airflow



Accessible  
Privacy

# Reduced Noise, Improved Concentration

**ISO**  
23351-1

Exposure to sound pollution causes stress related cardiovascular disorders. A quick escape from noise, Calma creates the perfect space with **Class A Soundproofing, certified by ISO 23351-1.**

Ideal voice clarity is developed with the engineered acoustic layering of Calma; **to achieve 0,30 sec of reverberation time.** Constantly tested and re-developed within Nurus' in-house Acoustic Lab; materials used to create Calma set new standards. Unlike others; Calma ensures **a balanced blockage of both low and high-frequency sounds.**





Air Quality

# We Care About The Air You Breathe



Calma

# Air Flow

## Air Flow within the cabinet

The air exchange rate indicates how frequently the pod completes a full cycle of air circulation.

This rate is measured in air changes per hour. According to the data, Calma pods are ventilated at a rate up to 106 times per hour.

Designed to preserve air quality of its environment, Calma pods maintain a healthy environment within their compact volume. This rate is essential in understanding how often indoor air is refreshed, which is critical for maintaining optimal air quality. Additionally, the air inlet area plays a key role in ensuring effective ventilation and enhancing overall indoor air conditions.



Air Exchange Period  
Every

**42** seconds

Air Inflow

**144,7** m<sup>3</sup>/h



\*These figures are based on evaluating the Calma Small and For U's ability to uphold indoor air quality and circulation. It's worth noting that these results specify when the ventilation fans operate at 100% capacity.





Lighting

# Reducing Stress is More Important Than Ever

Have you experienced visual strain lately?

**Long hours of exposure to artificial light** can cause chronic headaches and distractions.

Calma uses the closest possible light temperature and brightness to **a calming sunset (2700K)**. Using warm light amplifies Calma's affects on well-being; **aligning closer with circadian rhythms and preferences.**

Engineered and carefully calculated lighting distribution ensures that everyone in the meeting has enough light to work and **look their best during long hours of meetings or focus group work.**



# Certified Quality, Awarded Design

By integrating sustainable manufacturing techniques, renewable energy sources, and recyclable components, **Calma sets a new standard for sustainable workplace solutions.**

**Calma Small, For U and Medium holds an Environmental Product Declaration (EPD) certification.** Prepared in accordance with ISO 14025 and ISO 15804 standards, this declaration serves as a document that **scientifically and comprehensively analyzes the sustainability of the product** throughout its life cycle.

**Calma pods are certified by UL 962 standard, the gold standard for workplace safety and reliability.** Ensuring full compliance with strict U.S. and Canadian safety standards, Calma pods meets rigorous safety, fire resistance, and electrical performance standards.

Calma holds **multiple certifications, including SCS Indoor Air Quality**, supported using VOC-Free materials and Basotect G+ layers instead of conventional stone-wool insulations to enhance both acoustic performance and environmental sustainability.

**Awarded by the German Design Award for its outstanding design and by the Green Good Design Award for its sustainability, Calma For U stands out as a benchmark in responsible innovation.**



# Sustainable & VOC-Free HDF Powder Coating



Durable



Easy to  
Clean



Odorless



Moisture  
Resistant



Low Risk of  
Fire Hazard



100% Healthy  
Eco-Friendly



Anti-Allergic  
Antibacterial



Non-Toxic



0% Paint  
Waste

Healthy & Sustainable

# Calma: Built to Sustain, Committed to Health



Calma spaces are made with **100% solar energy** and an unwavering dedication to sustainability. Calma exemplifies commitment to environmental sustainability through its efficient, innovative manufacturing processes and use of eco-friendly materials.

Manufactured within a **95% vertically integrated facility**, the **circular production system** also minimizes Scope 3 Carbon emissions.

Calma spaces are crafted using a zero-waste, **HDF powder coating process**, which eliminates any **VOC (organic and inorganic)** emissions, resulting in a fine-grained, antibacterial surface that is easy to clean and maintain.

This process also uses **lower heat (130-140°C)** for curing a **thermoset, durable surface**, reducing energy consumption compared to traditional methods.

Calma's structure incorporates responsibly sourced materials, including **FSC certified wood**, and **recycled PET felt**. The result is a fine-grained, antibacterial surface that is easy to clean and maintain.




# Calma Small

## Product Features



- Occupancy Indicators 1**  
**Activated by PIR Sensors**  
*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute
- Sound Absorbent 2**  
**Recycled Felt Layering**  
Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)
- Standard Fixed Desk 3**  
**Optional Height Adjustable Desk**  
HDF powder coated with matte, textured finish, height adjustable (68 to 118 cm) or at fixed height (96 cm)  
Max. weight carried: 50 kgs  
Spiral cable extension: 500mm, GST 18 outlet connection
- Laminated Glass 4**  
5+5mm acoustic laminated glass on the back, low freq. vibration absorber
- Air Ventilation 5**  
2 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

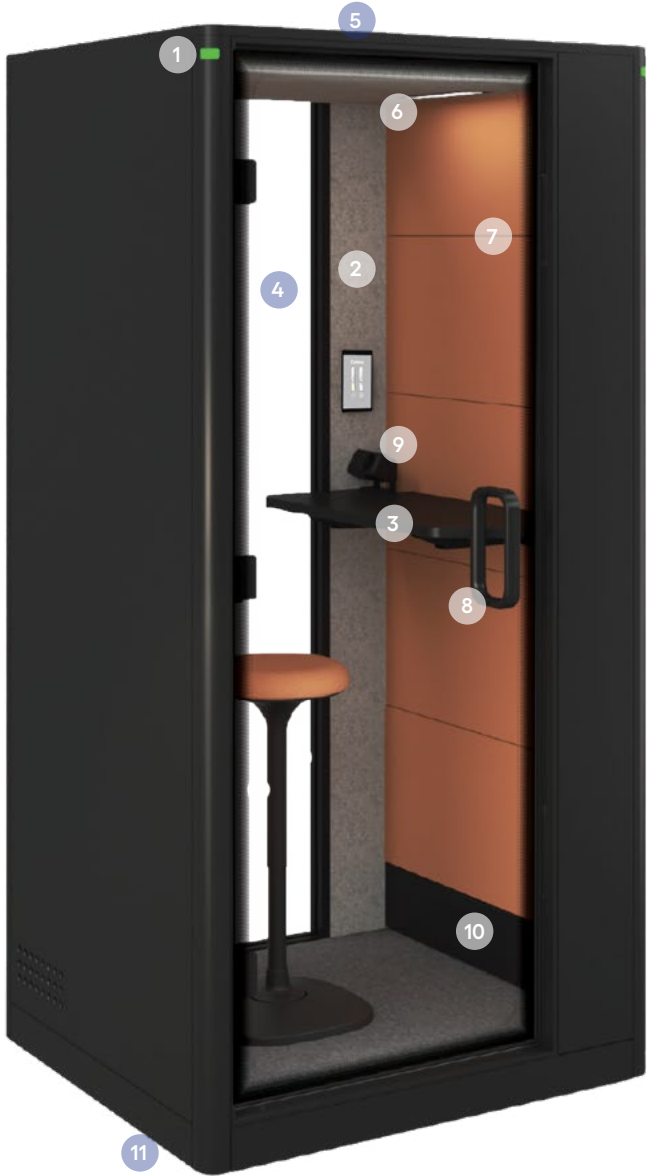

### 6 Dimmeable LED Lights

STANDARD	FOR USA
Osram Dimmer LED's 6,2W (per 1 pc LED) 168 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top	Osram Dimmer LED's 12,6W (per 1 pc LED) 143,3 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top

### 7 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free, low risk of fire hazard

### 8 Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### 9 Desktop Outlet

Standard black plastic with powder coated aluminium frame  
1 unit Outlet  
1 unit USB A+C Type

### 10 Main Power Unit

STANDARD	FOR USA
3000 mm input cable 220V-230V EUR Plug Type 3800mm input cable 220V-230V UK Plug or Multinational plug is available 4A Fuse Standard Black Colour Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 32 Watts	US 5-15R P to IEC C13 power cord 10 ft length (110 VAC) - - - 8A Fuse Standard Black Colour Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 32 Watts

### 11 Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Gravity Stool placed within Calma Small is an optional furniture.

1 unit CAT6 RJ45 Ethernet cable can be mounted on the ceiling or the floor as well



Touch Screen Panel



Magnetic Door



Links Module



Ventilation Fans

# Calma For U

## Product Features



**Occupancy Indicators 1**  
**Activated by PIR Sensors**  
*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

**Sound Absorbent 2**  
**Recycled Felt Layering**  
Antibacterial, Anti-Allergen  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

**Tempered Glass Door 3**  
12mm single piece tempered glass with 180° opening angle

**Laminated Glass 4**  
5+5mm acoustic laminated glass on the back, low freq. vibration absorber

**Desktop Outlet 5**  
Standard black plastic with powder coated aluminium frame  
1 unit Outlet  
1 unit USB A+C Type

**Air Ventilation 6**  
2 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



### 7 Dimmeable LED Lights

STANDARD	FOR USA
Osram Dimmer LED's 6,2W (per 1 pc LED) 168 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top	Osram Dimmer LED's 12,6W (per 1 pc LED) 143,3 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top

### 8 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### 9 Reservation System Screen

*(Optional)*

### 10 Media Wall & Integrated Facelights

*(Standard Feature for US Orders; Optional Feature for Global Orders)*  
Compatible with screens up to 27 inches

### 11 Depth Adjustable Desk

HDF powder coated with matte, textured finish, depth adjustable  
(16 cm retractable) at fixed height (74 cm)  
Max. weight carried: 50 kgs  
Spiral cable extention: 500mm, GST 18 outlet connection


### 12 Main Power Unit

STANDARD	FOR USA
3000 mm input cable 220V-230V EUR Plug Type 3800mm input cable 220V-230V UK Plug or Multinational plug is available 4A Fuse Standard Black Colour Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front Operating at full power, w/o media wall total power consumption: 45 Watts	US 5-15 P to IEC C13 power cord 10 ft length (110 VAC) - - 8A Fuse Standard Black Colour Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front Operating at full power, w/o media wall total power consumption: 45 Watts

### 13 Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Mou office chair placed within Calma For U is an optional furniture.

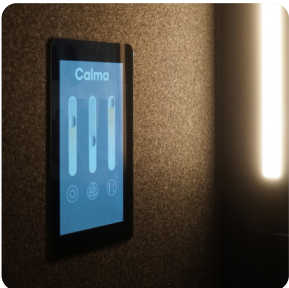

Touch Screen Panel



Magnetic Door



Media Wall  
Please see electrical specifications page for detailed information



Optional Soft Seating



# Calma Medium

## Product Features



- Occupancy Indicators 1**  
**Activated by PIR Sensors**

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute
- Sound Absorbent 2**  
**Recycled Felt Layering**

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)
- Tempered Glass Door 3**

12mm single piece tempered glass with 180° opening angle
- Laminated Glass 4**

5+5mm acoustic laminated glass on the back, low freq. vibration absorber
- Air Ventilation 5**

4 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



6 Dimmeable LED Lights

STANDARD	FOR USA
Osram Dimmer LED's 6,2W (per 1 pc LED) 168 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top	Osram Dimmer LED's 12,6W (per 1 pc LED) 143,3 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top

7 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

8 TV Bracket

*(Optional)*  
Compatible with screens up to 32 inches

9 Links Electrification Module & Touch Screen Panel

- 10 Meeting Table
- (Optional)*  
500x700mm desk for two people, height 74 cm

11 Main Power Unit

STANDARD	FOR USA
3000 mm input cable 220V-230V EUR Plug Type 3800mm input cable 220V-230V UK Plug or Multinational plug is available 4A Fuse Standard Black Colour Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 54 Watts	US 5-15 P to IEC C13 power cord 10 ft length (110 VAC) - - - 8A Fuse Standard Black Colour Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 54 Watts

12 Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Alava office chair placed within Calma Medium is an optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links  
Please see electrical specifications page for detailed information



Ventilation Fans

# Calma Large

## Product Features



**Occupancy Indicators 1**  
**Activated by PIR Sensors**  
*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

**Sound Absorbent 2**  
**Recycled Felt Layering**  
Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

**TV Bracket 3**  
*(Optional)*  
Compatible with screens up to 32 inches

**Links Electrification Module 4**  
**& Touch Screen Panel**

**Laminated Glass 5**  
5+5mm acoustic laminated glass, low frequency vibration absorber

**Air Ventilation 6**  
6 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



### 7 Dimmeable LED Lights

STANDARD	FOR USA
Osram Dimmer LED's 6,2W (per 1 pc LED) 168 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top	Osram Dimmer LED's 12,6W (per 1 pc LED) 143,3 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top

### 8 Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### 9 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### 10 Meeting Desk & Soft Seating

*(Optional)*  
680x900mm desk for up to four people, height 74 cm  
Built-in Soft Seating with cushions and padded seat

### 11 Main Power Unit

STANDARD	FOR USA
3000 mm input cable 220V-230V EUR Plug Type 3800mm input cable 220V-230V UK Plug or Multinational plug is available 4A Fuse Standard Black Colour Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 94 Watts	US 5-15 P to IEC C13 power cord 10 ft length (110 VAC) - - 8A Fuse Standard Black Colour Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 94 Watts

### 12 Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.



Touch Screen Panel



Magnetic Door



Nurus Links  
Please see electrical specifications page for detailed information



Ventilation Fans



# Calma XLarge

## Product Features



### Occupancy Indicators 1 Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent 2 Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### TV Bracket 3

*(Optional)*  
Compatible with screens up to 32 inches

### Links Electrification Module 4 & Touch Screen Panel

### Laminated Glass 5

5+5mm acoustic laminated glass, low frequency vibration absorber

### Air Ventilation 6

8 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



### 7 Dimmeable LED Lights

#### STANDARD

Osram Dimmer LED's  
6,2W (per 1 pc LED) 168 lm/W  
2700K Warm Light  
Up to 200 Lux, measurement on the table top

#### FOR USA

Osram Dimmer LED's  
12,6W (per 1 pc LED)  
143,3 lm/W  
2700K Warm Light  
Up to 200 Lux, measurement on the table top

### 8 Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### 9 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### 10 Meeting Desk

*(Optional)*  
Full length 680x1200 mm desk for up to four people, height 74 cm

### 11 Main Power Unit

#### STANDARD

3000 mm input cable 220V-230V  
EUR Plug Type  
3800mm input cable 220V-230V  
UK Plug or Multinational plug is available  
4A Fuse  
Standard Black Colour  
Main power unit is placed on the **back bottom right corner** of Calma when faced up front  
Operating at full power, total power consumption: 100 Watts

#### FOR USA

US 5-15 P to IEC C13 power cord  
10 ft length (110 VAC)  
-  
-  
-  
8A Fuse  
Standard Black Colour  
Main power unit is placed on the **bottom right corner** of Calma when faced up front  
Operating at full power, total power consumption: 100 Watts

### 12 Seismic Footplates

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Uneo office chairs placed within Calma XLarge are optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links

Please see electrical specifications page for detailed information



Ventilation Fans

# Calma XXLarge

## Product Features



### Occupancy Indicators 1 Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent 2 Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### TV Bracket 3

*(Optional)*  
Compatible with screens up to 32 inches

### Links Electrification Module 4 & Touch Screen Panel

### Laminated Glass 5

5+5mm acoustic laminated glass, low frequency vibration absorber

### Air Ventilation 6

12 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



### 7 Dimmeable LED Lights

#### STANDARD

Osram Dimmer LED's  
6,2W (per 1 pc LED)  
168 lm/W  
2700K Warm Light  
Up to 200 Lux, measurement on the table top

#### FOR USA

Osram Dimmer LED's  
12,6W (per 1 pc LED)  
143,3 lm/W  
2700K Warm Light  
Up to 200 Lux, measurement on the table top

### 8 Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### 9 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### 10 Meeting Desk

*(Optional)*  
Full length 680x2000 mm desk for up to four people, height 74 cm

### 11 Main Power Unit

#### STANDARD

3000 mm input cable 220V-230V EUR Plug Type  
3800mm input cable 220V-230V UK Plug or Multinational plug is available  
4A Fuse  
Standard Black Colour  
Main power unit is placed on the **back bottom right corner** of Calma when faced up front  
Operating at full power, total power consumption: 148 Watts

#### FOR USA

US 5-15 P to IEC C13 power cord 10 ft length (110 VAC)  
-  
-  
-  
8A Fuse  
Standard Black Colour  
Main power unit is placed on the **bottom right corner** of Calma when faced up front  
Operating at full power, total power consumption: 148 Watts

### 12 Seismic Footplates

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



Touch Screen Panel



Magnetic Door



Nurus Links

Please see electrical specifications page for detailed information



Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Alava office chairs placed within Calma XLarge are optional furniture.



# Calma For All

## Product Features



**Occupancy Indicators 1**  
**Activated by PIR Sensors**  
*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

**Sound Absorbent 2**  
**Recycled Felt Layering**  
Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
Recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

**Links Electrification Module 3**  
**& Touch Screen Panel**

**Laminated Glass 4**  
5+5mm acoustic laminated glass, low frequency vibration absorber

**Air Ventilation 5**  
8 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



6 Dimmeable LED Lights

STANDARD	FOR USA
Osram Dimmer LED's 6,2W (per 1 pc LED) 168 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top	Osram Dimmer LED's 12,6W (per 1 pc LED) 143,3 lm/W 2700K Warm Light Up to 200 Lux, measurement on the table top

7 Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

8 Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

9 Foldable Desk & Built in Seating

Calma For All offers fully inclusive functionality with its foldable design. The 942mm x 650mm desk can be folded upright when not in use or locked in place at a 747mm height. The foldable seating allows multiple configurations: seating for four, seating for two plus space for a wheelchair, or space for two wheelchair users.

10 Main Power Unit

STANDARD	FOR USA
3000 mm input cable 220V-230V EUR Plug Type 3800mm input cable 220V-230V UK Plug or Multinational plug is available 4A Fuse Standard Black Colour Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 100 Watts	US 5-15 P to IEC C13 power cord 10 ft length (110 VAC) - - - 8A Fuse Standard Black Colour Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front Operating at full power, total power consumption: 100 Watts

11 On The Ground Plane

To ensure easy access, Calma For All is installed directly on the floor, allowing users to enter and exit without any steps or barriers.

\*Lux measurement standards are based on values from table top surfaces.



**Touch Screen Panel and Links Module**  
Please see electrical specifications page for detailed information



**Magnetic Door**








**Accessible Design**



**Foldable Features**

# Technical Specifications










	Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
							
Dimensions	39.4x43.3x88.1 in 100x110x224 cm	39.4x55.1x88.1 in 100x140x224 cm	39.4x86.6x88.1 in 100x220x224 cm	56.6x86.6x88.1 in 144x220x224 cm	74x86.6x88.1 in 188x220x224 cm	108.6x86.6x88.1 in 276x220x224 cm	74x86.6x88.1 in 188x220x224 cm
Interior	35.3x36.6x80.6 in 89,6x93x204,8 cm	35.3x48.4x80.6 in (89,6x123x204,8cm	35.3x80.7x80.6 in 89,6x205x204,8 cm	52.6x80.7x80.6 in 133,6x205x204,8 cm	69.9x80.7x80.6 in 177,6x205x204,8 cm	104.6x80.7x80.6 in 265,6x205x204,8 cm	69.9x80.7x80.6 in 177,6x205x204,8 cm
Mobility	Yes 1 person	Yes 1 person	Yes 1 person	Yes 2 people	-	-	-
Cushioned Soft Seating Option	-	Optional	Optional	Optional	-	-	Standard Foldable, Built-in Seating
Max User Capacity	1 person	1 person	2 people	4 people	4 people	6 people	4 people seat or 2 wheelchairs
Air Fans	2 pcs	2 pcs	4 pcs	6 pcs	8 pcs	12 pcs	8 pcs
Castors	4 pcs	4 pcs	4 pcs	4 pcs	-	-	-
Fixed Feet	4 pcs	5 pcs	8 pcs	8 pcs	16 pcs	24 pcs	-
Table	Standard 370x820mm h: 960mm	Standard 432x880mm h: 740mm	Optional 500x700mm h: 740mm	Optional 680x900mm h: 740mm	Optional 680x1200mm h: 740mm	Optional 680x2000mm h: 740mm	Standard 651x942mm h: 747mm

Calma Small's optional height adjustable table can move from 68 to 118 cm or can be placed at standard fixed height: 96 cm.  
Calma For U's retractable table can change its depth up to 16 cm at fixed 74 cm height.



# Electrical Specifications
















	Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
							
Total Power Consumption	32 W	32 W, 45 W with Media Wall	54 W	94 W	100 W	148 W	100 W
Power Outlet	Desktop Outlet	Desktop Outlet	Within Links (2 pcs)	Within Links (2 pcs)	Within Links (2 pcs)	Within Links (2 pcs)	Within Links (2 pcs)
RJ45 Ethernet Entry	On Kickplate	On Kickplate	Within Links	Within Links	Within Links	Within Links	Within Links
HDMI	-	-	Optional with TV Bracket (1 pc)	Optional with TV Bracket (1 pc)	Optional with TV Bracket (1 pc)	Optional with TV Bracket (1 pc)	Optional with TV Bracket (1 pc)
Media Wall	-	Standard for US, Optional for Global Orders	-	-	-	-	-
TV Bracket	-	Optional (Within Media Wall, Compatible with screens up to 27 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	-
USB A + C	On Desktop Outlet	On Desktop Outlet	Within Links	Within Links	Within Links	Within Links	Within Links

The RJ45 Ethernet Data Cable can be used from the floor or the ceiling of the product.  
**Power outlets can be selected as European, Swiss (only available for DACH region), UK, US or Multinational types.**  
Recommended screen sizes are based on considering a healthy viewer distance.  
**TV screens are not included in Calma products and must be bought seperately.**

\*Please see page 38 for detailed information of Media Wall and illustrated Links modules.

# Packaging Specifications




	Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
Dimensions	 39.4x43.3x88.1 in 100x110x224 cm	 39.4x55.1x88.1 in 100x140x224 cm	 39.4x86.6x88.1 in 100x220x224 cm	 56.6x86.6x88.1 in 144x220x224 cm	 74x86.6x88.1 in 188x220x224 cm	 108.6x86.6x88.1 in 276x220x224 cm	 74x86.6x88.1 in 188x220x224 cm
Packaging	 1 Cardboard Crate 74x231x110 cm	 1 Cardboard Crate 74x231x110 cm	 1 Cardboard Crate 85x231x110 cm	 1 Cardboard Crate 109x231x110 cm	 2 Cardboard Crates 85x231x110 cm	 2 Cardboard Crates 109x231x110 cm	TBD
Weight	360 kgs	420 kgs	≈550 kgs	≈680 kgs	TBD	TBD	TBD
Estimated Installation Time*	2 people 25 mins	2 people 20 mins	2 people 30 mins	4 people 30 mins	4 people 70 mins	4 people 110 mins	TBD
Optional Soft Seating Packaging	-	 1 Cardboard Box 30 kgs 90x70x100 cm	 1 Cardboard Box 60 kgs 90x140x100 cm	 1 Cardboard Box 60 kgs 90x140x100 cm	-	-	-



Package dimensions are listed as Depth x Width x Height.  
**When placed on pallets, the total height increases by approximately 15 cm.**  
\*These installation times might last approximately 30-40 mins longer according to circumstances of the space and number of selected optional features of your product.



# Built-in Touch Screen Controls

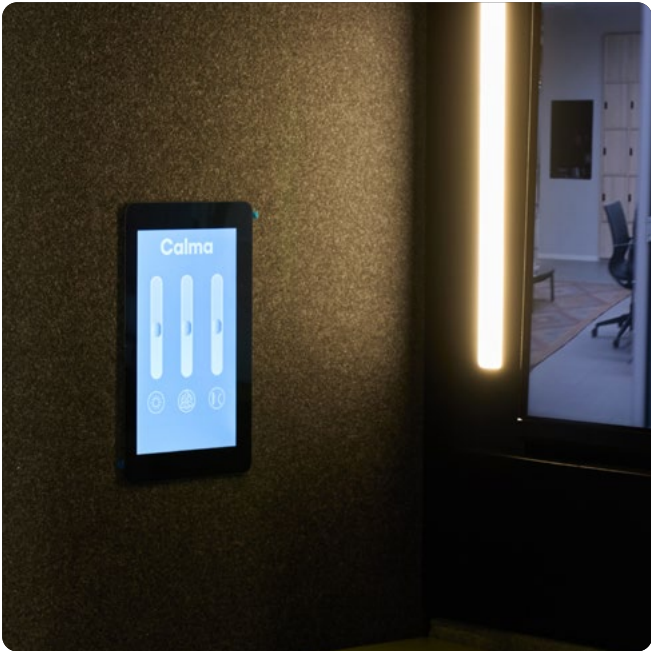

The touch screen panel placed on the interior walls of Calma pods allow you to **control fan speed and light dimmers**.

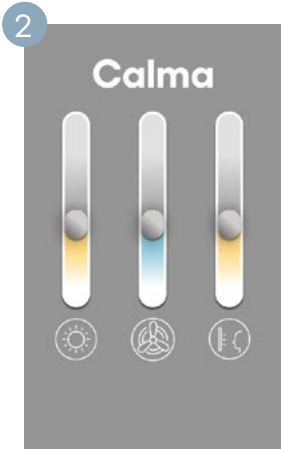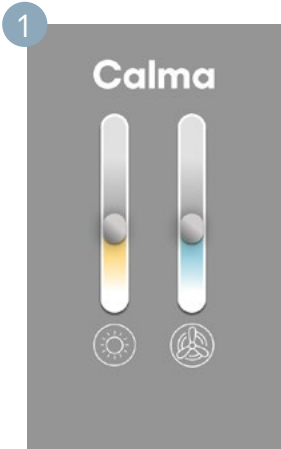


The touch screen controls inside Calma pods allow users to adjust ventilation and lighting levels with ease.

While all standard models feature a dual-slider interface, Calma For U is equipped with a media wall includes a third slider for precise facelight dimming.

# Optional Reservation Screen & App



Please note the optional reservation system screen is **available only for Calma For U**. The rest of the Calma models, reservation system can be accessed with the QR code.



The optional reservation screen placed on the exterior walls of Calma For U allow you to create an **instant meeting by direct access to the system**.

You can also use this system in other Calma models by scanning the QR code placed on the exterior wall and access the digital interface of the reservation system.

# Standard Type Electrification

## Calma Small



TOUCH PANEL:  
FANS, LIGHTS CONTROL




DESKTOP OUTLET  
USB A+C CHARGER



LINKS ON KICKPLATE:  
RJ45 DATA CONNECTOR  
GST 18 SOCKET

## Calma For U

(Without Media Wall)



TOUCH PANEL:  
FANS, LIGHTS CONTROL




DESKTOP OUTLET  
USB A+C CHARGER




LINKS ON KICKPLATE:  
RJ45 DATA CONNECTOR  
GST 18 SOCKET

(With Media Wall)




TOUCH PANEL:  
FANS, LIGHTS  
FACELIGHTS CONTROL




LINKS ON WALL:  
OUTLET,  
USB C CHARGER,  
RJ45 DATA CONNECTOR

## Calma Medium, Large, X Large, XX Large and Calma For All

(Without TV Bracket Integration)




TOUCH PANEL:  
FANS, LIGHTS CONTROL




LINKS ON WALL:  
2X OUTLETS  
USB A+C CHARGER  
RJ45 DATA CONNECTOR

(With TV Bracket Integration)



TOUCH PANEL:  
FANS, LIGHTS CONTROL



LINKS ON WALL:  
2X OUTLETS  
HDMI ENTRY  
USB C CHARGER  
RJ45 DATA CONNECTOR

**Media Wall is an optional integration, only available for Calma For U.**

A standard media wall includes

- 1 Links Unit that contains:
  - 1 pc 220 VAC power outlet (Max Output Power 750W)
  - 1 pc USB C charger
  - 1 pc RJ45 Ethernet Type Data

- 2 units of Dimmeable Facelights:
  - Optimised digital communication, controlled by the integrated touch panel of Calma For U.

- Behind the screen there are 2 standard connections:
  - 1 pc 220 VAC power outlet (for mounting screen)
  - HDMI cable tunnel for TV integration

\*Please note that TV, Screen or monitors are not included or attached to the media wall unit.


Maximum 27 inch screens can be mounted on the Media Wall unit. The electrification unit shown on the visual is Multinational Type. following Socket Types are supported for Calma: Multinational (Universal Common Sockets except Switzerland), Schuko (EUR), UK, US (NEMA 5-15R, USA & CANADA)

\*When TV Bracket option for Calma Large models is selected, while USB-C remains, the USB-A unit is removed and replaced with an HDMI outlet instead. Also 1 outlet for TV and 1 HDMI cable tunnel will be added on the panel for TV integration. For USA type Calma models, power outlets are US NEMA 5-15R. See details on following page.




# US Type Electrification

## Calma Small



TOUCH PANEL:  
FANS, LIGHTS CONTROL




DESKTOP OUTLET  
USB A+C CHARGER




LINKS ON KICKPLATE:  
RJ45 DATA CONNECTOR  
GST 18 SOCKET

## Calma For U

(Without Media Wall)



TOUCH PANEL:  
FANS, LIGHTS CONTROL




DESKTOP OUTLET  
USB A+C CHARGER



LINKS ON KICKPLATE:  
RJ45 DATA CONNECTOR  
GST 18 SOCKET

(With Media Wall)




TOUCH PANEL:  
FANS, LIGHTS  
FACELIGHTS CONTROL




LINKS ON WALL:  
OUTLET,  
USB A+C CHARGER,  
RJ45 DATA CONNECTOR

## Calma Medium, Large, X Large, XX Large and Calma For All



(With or Without TV Bracket Integration)



TOUCH PANEL:  
FANS, LIGHTS CONTROL



LINKS ON WALL:  
2X OUTLETS  
USB A+C CHARGER  
RJ45 DATA CONNECTOR

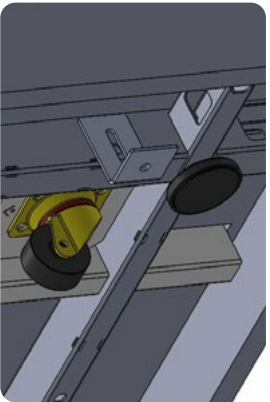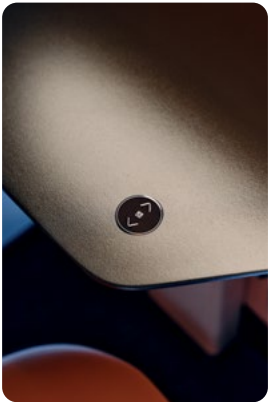


Height Adjustable Table

Links Modules

Seismic Foot Plates

# Optional Components



TV Bracket

This component is available for Calma Models of 220 cm and above width only. We recommend placing a 27 inch TV inside Calma, and maximum 32 inch TV can be mounted.



Housing for Sprinkler

Housing for Sprinkler  
On the ceiling of Calma pods, housing for sprinkler installation can be opened upon request. The package does not include the fixtures, only the holes can be drilled.




Reservation Screen

Reservation Screen  
The reservation screen is an optional feature to be added on request to Calma For U.


# Analysis & Reports

\*Please contact your Nurus representative for detailed information about lab tests and analyze reports of Calma products since measurements are updated periodically for each product.

## CO<sub>2</sub> Levels

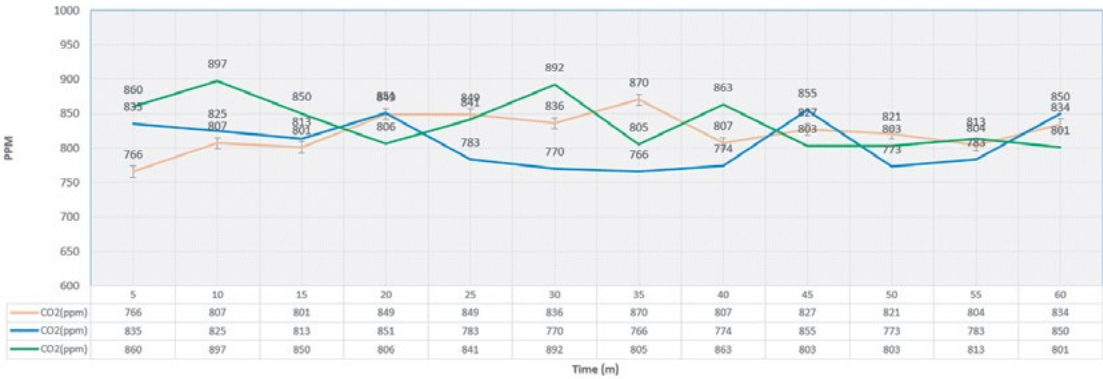

## Humidity (%)

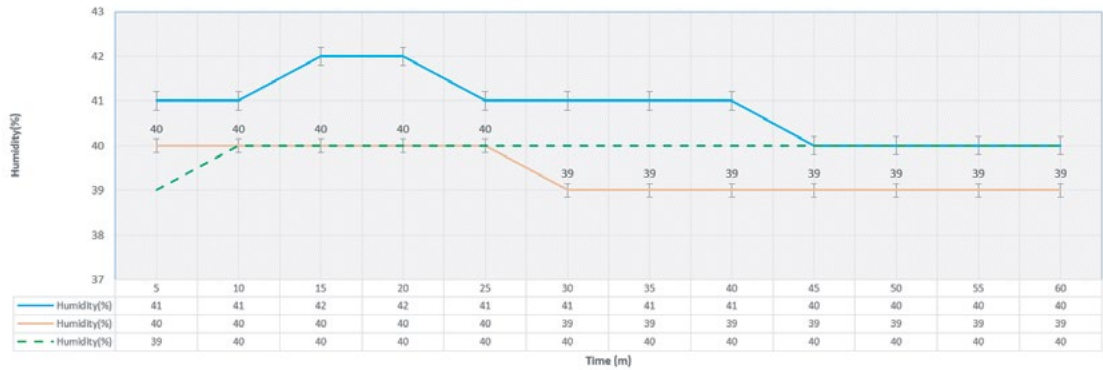


## Temperature







# Calma Materials

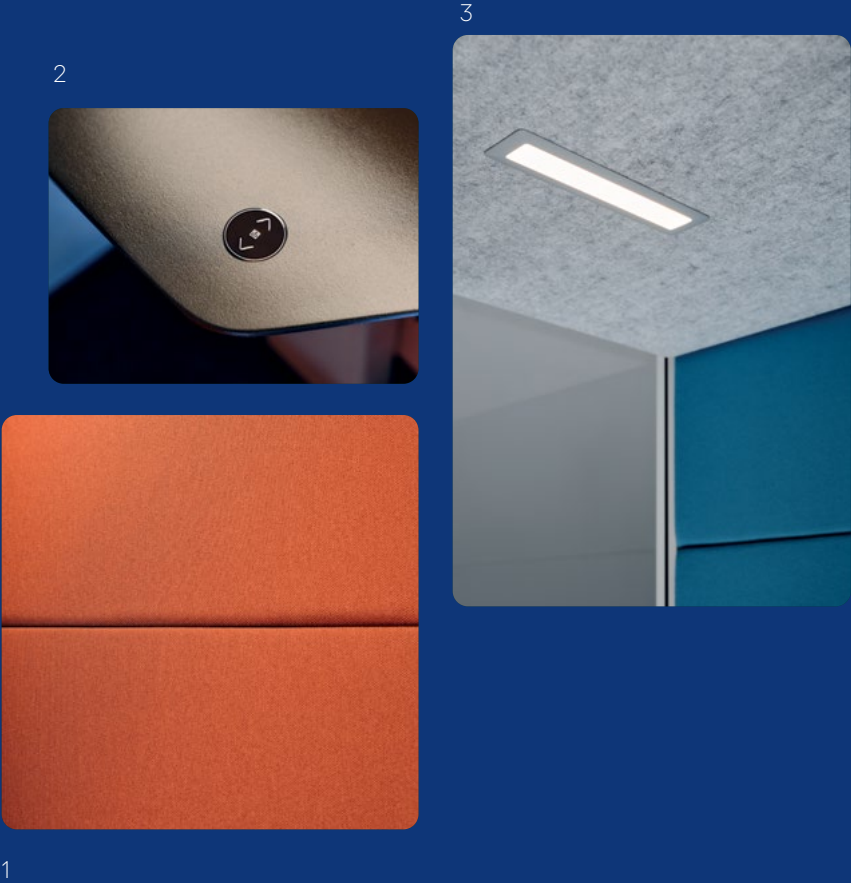

- 1 Upholstered Side Walls
- 2 HDF Powder Coated Exterior Walls and Built-in Furniture
- 3 %50 Recycled PET Felt Ceiling and Back Wall


## HDF Powder Coating Finishes

Colour options for exterior walls, frame, door handle and table top surfaces.



## Felt Options

Colour options the ceiling and interior back walls.

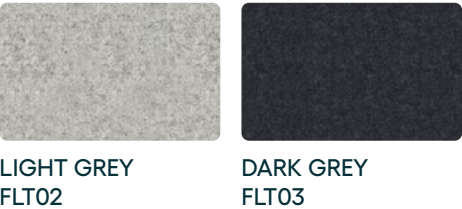


## Carpet Options

Colour options the ceiling and interior back walls.







Upholstery - Era

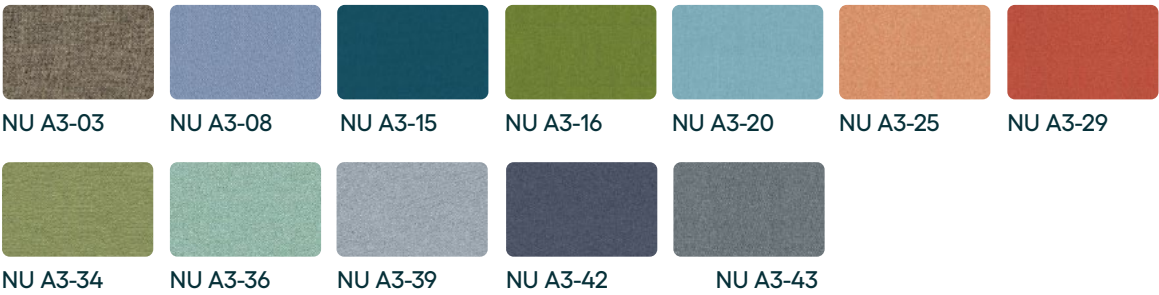

Upholstery - Blazer

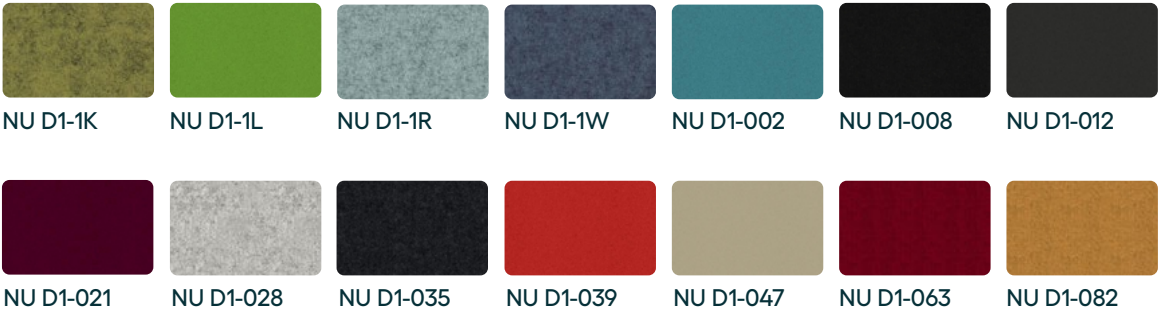

Upholstery - Rivet

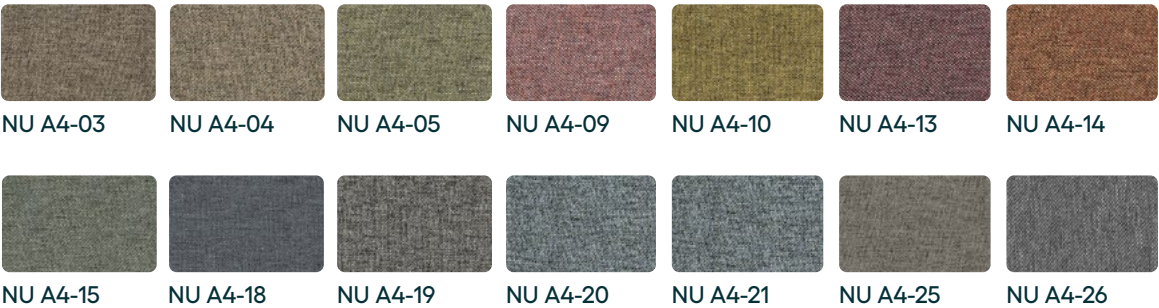

Fabric Specifications



100% Polyester

Weight: 320 g/m2  $\pm$ 5%  
Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)  
Light Fastness: 5 (ISO 105 - B02)

Flammability  
BS 7176 Low Hazard  
EN 1021 - 1&2 (cigarette & match)  
EN 13501-1 Adhered Class B, s1, d0  
EN 13501-1 Un-adhered Class C, s1, d0  
BS 7176 Medium Hazard with EnviroFlam5  
BS 5852 Ignition Source 5 with EnviroFlam5  
The Furniture & Furnishing (Fire Safety) Regulations 1988 (UK domestic cig & match) with EnviroFlam5



100% Virgin Wool

Weight: 460 g/m2  $\pm$ 5%  
Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)  
Light Fastness: 4-6 (ISO 105 - B02)

Flammability  
EN 1021 - 1&2 (cigarette & match)  
BS 7176 Low Hazard  
NF D 60-013  
ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m3 Foam)  
UNI 9175 Classe 1 IM  
BS 476 Part 7 Class 1 (Adhered)  
EN 13501-1 Adhered Class D, s1, d0  
IMO FTP Code (Part 8)  
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match)  
BS 5852 Ignition Source 5 when FR treated  
BS 7176 Medium Hazard when FR treated  
BS 476 Part 6 Class 0 when FR treated (Adhered)  
EN 13501-1 Adhered Class B, s1, d0 when FR treated  
EN 13501-1 Un-adhered Class D, s2, d0 when FR treated  
BS 5867-2 Type B Curtains & Drapes when FR treated  
EN 13773 Class 1 (when FR treated)



100% Post Consumer Recycled Polyester

Weight: 280 g/m2  $\pm$ 5%  
Fastness to Rubbing  
Wet: 4, Dry: 4 (ISO 105 - X12)  
Light Fastness: 5-6 (ISO 105 - B02)


Flammability  
EN 1021 - 1&2 (cigarette & match)  
BS 7176 Low Hazard  
UNI 9175 Classe 1 IM  
EN 13501-1 Adhered Class B, s2, d0  
EN 13501-1 Un-adhered Class B, s1, d0  
Optional: Please specify when ordering: BS 5852 Ignition Source 5 when treated with EnviroFlam5  
BS 7176 Medium Hazard when treated with EnviroFlam5  
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) with EnviroFlam5  
DIN 4102 B1 with FR Treatment (Gorts)  
BS 5867-2: Type B Curtains & Drapes with FR Treatment (Gorts)  
EN 13773 Class 1 with FR Treatment (Gorts)

# Calma


## Recommendations

For a better experience and successful use of the product, please make sure to keep in mind our recommendations and guides when using, installing or moving Calma.

- Do not plug and appliances more than 220-230 VAC.
- Make sure that Calma is not plugged before you open the access cover on top.
- The ventilation and lights work at the same time, make sure the lights are on when you are in the pod.
- Do not block the vent grill, keep 20 cm distances between Calma products and walls.
- Do not smoke inside.
- To have better access to air, we also recommend having at least 20 cm space distance between the ceiling and pod.
- Keep the door closed at all times.
- Keep fire sources away from Calma at all times.
- **Do not install high power-consuming devices such as heaters or vacuum cleaners inside Calma.**
- The maximum power outlet capacity is 750W for standard Calma.

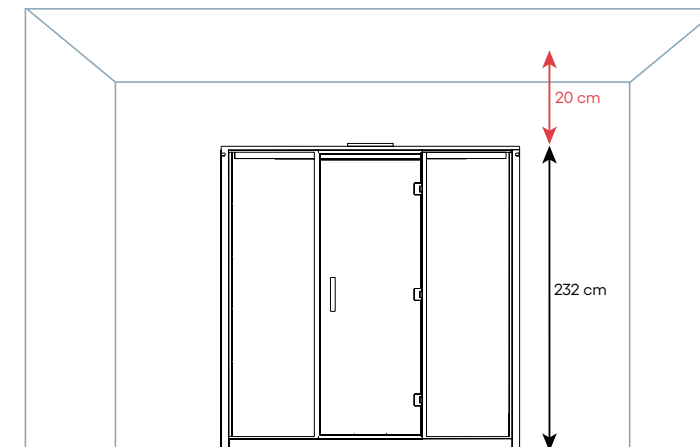

Please make sure to have some space between Calma products and their surroundings for healthy air circulation and use. The minimum recommended space requirement for the total height of Calma models is 252 cm.

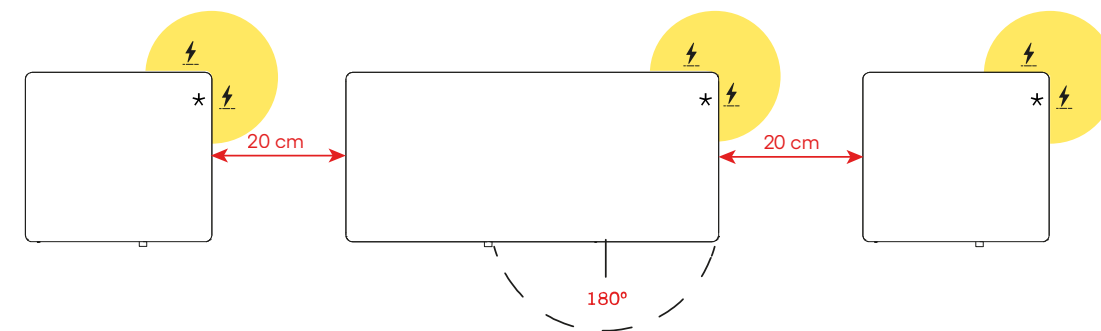

**When placing Calma units, make sure the bottom right corner of the back panel is close to a power source.**

US Type Calma products only has one power entrance on the bottom right corner of the **right panel**. For the standard types, the bottom right corner of the **back panel** can also be used.





Visit Our Website  
[calma.nurus.com](https://calma.nurus.com)



Configure  
Your Calma

**nurus**